

TECHNISCHE DATEN:

Aufbau

Hutmutter	Polyamid PA6 V-2
Dichtring	Polychloropren-Nitrilkautschuk CR/NBR
Zwischenstutzen	Polyamid PA6 V-2
Anschlussgewinde	Pg, nach DIN 40430

Eigenschaften

- mit Biegeschutzspirale
- für bewegliche, flexible Leistungen
- integrierte Zugentlastung
- großer Dicht- und Klemmbereich
- montagefreundlich
- UV- und Witterungsbeständigkeit gemäß UL 514B

Temperaturbereich	-20 °C / +100 °C (dynamisch) -40 °C (statisch, kurzzeitig)
-------------------	---

Schutzart	IP68 - 5 bar
Prüfnorm	UL 514B
UL / CSA-File	E140310
Hinweis	Angaben zu den Prüfergebnissen - siehe Anhang

TECHNICAL DATA:

Configuration


Dome nut	Polyamide PA6 V-2
Sealing ring	Polychloroprene-Nitrile rubber CR/NBR
Gland body	Polyamide PA6 V-2
Connecting thread	Pg, as per DIN 40430

Properties

- with spiral top
- for movable flexible cables
- integrated anchorage
- wide sealing and clamping range
- easy-to-install
- UV- and weather resistance according UL 514B

Temperature range	-20 °C / +100 °C (dynamic) -40 °C (static, short term)
-------------------	---

Protection grade	IP68 - 5 bar
Test standard	UL 514B
UL / CSA-File	E140310
Comment	details about test results - see annex

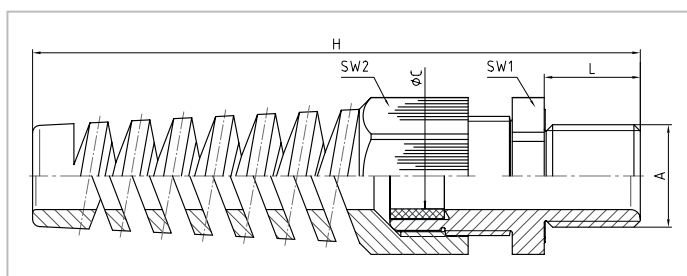

Merkmale

Characteristics

Anschlussgewinde Standardlänge

Connecting thread standard length

A	øC mm	L mm	SW1 mm	SW2 mm	H mm		RAL 7001 silbergrau silver grey Art.-Nr. / Part No. RAL 7035 lichtgrau light grey Art.-Nr. / Part No. RAL 9005 tiefschwarz jet black Art.-Nr. / Part No.		
Pg 7	3 - 6,5	8	15	15	63	100	50.007 PA/BS	50007PABS7035	50.007 PABSSW
Pg 9	4 - 8	8	19	19	74	100	50.009 PA/BS	50009PABS7035	50.009 PABSSW
Pg 11	5 - 10	8	22	22	87	100	50.011 PA/BS	50011PABS7035	50.011 PABSSW
Pg 13,5	6 - 12	9	24	24	98	50	50.013 PA/BS	50013PABS7035	50.013 PABSSW
Pg 16	10 - 14	10	27	27	112	25	50.016 PA/BS	50016PABS7035	50.016 PABSSW
Pg 21	13 - 18	11	33	33	130	25	50.021 PA/BS	50021PABS7035	50.021 PABSSW