

TECHNISCHE DATEN:

Aufbau

Hutmutter	Polyamid PA6 V-2
Dichtring	Polychloropren-Nitrilkautschuk CR/NBR
Zwischenstutzen	Polyamid PA6 V-2
Anschlussgewinde	Pg, nach DIN 40430

Eigenschaften

- Reduzier-Dichtring für kleine Kabel
- integrierte Zugentlastung
- großer Dicht- und Klemmbereich
- montagefreundlich
- UV- und Witterungsbeständigkeit gemäß UL 514B

Temperaturbereich	-20 °C / +100 °C (dynamisch) -40 °C (statisch, kurzzeitig)
-------------------	---

Schutzart	IP68 - 5 bar
-----------	--------------

Prüfnorm	UL 514B
----------	---------

UL / CSA-File	E140310
---------------	---------

Hinweis	Angaben zu den Prüfergebnissen - siehe Anhang
---------	---

TECHNICAL DATA:

Configuration

Dome nut	Polyamide PA6 V-2
Sealing ring	Polychloroprene-Nitrile rubber CR/NBR
Gland body	Polyamide PA6 V-2
Connecting thread	Pg, as per DIN 40430

Properties

- reducing sealing ring for small cable diameter
- integrated anchorage
- wide sealing and clamping range
- easy-to-install
- UV- and weather resistance according UL 514B


Temperature range	-20 °C / +100 °C (dynamic) -40 °C (static, short term)
-------------------	---

Protection grade	IP68 - 5 bar
------------------	--------------

Test standard	UL 514B
---------------	---------

UL / CSA-File	E140310
---------------	---------

Comment	details about test results - see annex
---------	--

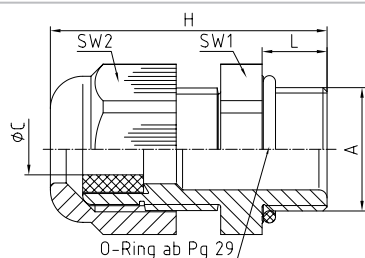

Merkmale

Characteristics

Anschlussgewinde Standardlänge

Connecting thread standard length

A	øC mm	 L mm	SW1 mm	SW2 mm	H mm		 RAL 7001 silbergrau silver grey	 RAL 7035 lichtgrau light grey	 RAL 9005 tiefschwarz jet black
							Art.-Nr. / Part No.	Art.-Nr. / Part No.	Art.-Nr. / Part No.
Pg 7	2 - 5	8	15	15	30,5	100	50.007 PA/R	50.007PAR7035	50.007 PA/RSW
Pg 9	2 - 6	8	19	19	34	100	50.009 PA/R	50.009PAR7035	50.009PA/R/SW
Pg 11	3 - 7	8	22	22	37	100	50.011 PA/R	50.011PAR7035	50.011 PA/RSW
Pg 13,5	5 - 9	9	24	24	39	100	50.013 PA/R	50.013PAR7035	50.013 PA/RSW
Pg 16	7 - 12	10	27	27	42,5	50	50.016 PA/R	50.016PAR7035	50.016 PA/RSW
Pg 21	9 - 16	11	33	33	47,5	50	50.021 PA/R	50.021PAR7035	50.021 PA/RSW
Pg 29	12 - 20	11	42	42	53	25	50.029 PA/R	50.029PAR7035	50.029 PAR/SW
Pg 36	20 - 26	13	53	53	61	10	50.036 PA/R	50.036PAR7035	50.036 PAR/SW