

TECHNISCHE DATEN:
Aufbau

Hutmutter	Messing CuZn39Pb3, galv. vernickelt
Lamelleneinsatz	Polyamid PA6 V-2
Dichtring	Polychloropren-Nitrilkautschuk CR/NBR
Zwischenstutzen	Messing CuZn39Pb3, galv. vernickelt
O-Ring	Nitrilkautschuk NBR
Anschlussgewinde	Pg, nach DIN 40430

Eigenschaften

- Reduzier-Dichtring für kleine Kabel
- integrierte Zugentlastung
- Verdrehenschutz
- großer Dicht- und Klemmbereich
- montagefreundlich

Temperaturbereich	-20 °C / +100 °C (dynamisch) -40 °C (statisch, kurzzeitig)
-------------------	---

Schutzart	IP68 - 5 bar
-----------	--------------

TECHNICAL DATA:
Configuration

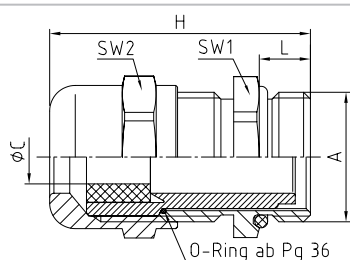
Dome nut	Brass CuZn39Pb3, nickel-plated
Lamellar insert	Polyamide PA6 V-2
Sealing ring	Polychloroprene-Nitrile rubber CR/NBR
Gland body	Brass CuZn39Pb3, nickel-plated
O-ring	Nitrile rubber NBR
Connecting thread	Pg, as per DIN 40430

Properties

- reducing sealing ring for small cable diameter
- integrated anchorage
- protection against twisting
- wide sealing and clamping range
- easy-to-install

Temperature range	-20 °C / +100 °C (dynamic) -40 °C (static, short term)
-------------------	---

Protection grade	IP68 - 5 bar
------------------	--------------


Merkmale
Characteristics
Anschlussgewinde Standardlänge
Connecting thread standard length

A	ØC mm	$\frac{H}{mm}$ L mm	SW1 mm	SW2 mm	H mm		Art.-Nr. / Part No.
Pg 7	2 - 5	5	14	14	24	100	50.007 R
Pg 9	2 - 6	6	17	17	29	100	50.009 R
Pg 11	3 - 7	6	20	20	29,5	50	50.011 R
Pg 13,5	5 - 9	6,5	22	22	31,5	50	50.013 R
Pg 16	7 - 12	6,5	24	24	31,5	50	50.016 R
Pg 21	9 - 16	7	30	30	34	50	50.021 R
Pg 29	12 - 20	8	40	40	39	50	50.029 R
Pg 36	20 - 26	9	50	50	45	10	50.036 R