

TECHNISCHE DATEN:

Aufbau

Hutmutter	Polyamid PA6 V-2
Dichtring / Außenteil	Polychloropren-Nitrilkautschuk CR/NBR
Dichtring / Innenteil	TPE TPS
Zwischenstutzen	Polyamid PA6 V-2
Anschlussgewinde	metrisch, nach EN 60423

Eigenschaften

- Reduzier-Dichtring für kleine Kabel
- integrierte Zugentlastung
- großer Dicht- und Klemmbereich
- montagefreundlich
- UV- und Witterungsbeständigkeit gemäß UL 514B

Temperaturbereich	-20 °C / +100 °C (dynamisch) -40 °C (statisch, kurzzeitig)
-------------------	---

Schutzart IP68 - 5 bar

Prüfnorm UL 514B

UL / CSA-File E140310

Hinweis Angaben zu den Prüfergebnissen - siehe Anhang

TECHNICAL DATA:

Configuration

Dome nut	Polyamide PA6 V-2
Sealing ring/outer part	Polychloroprene-Nitrile rubber CR/NBR
Sealing ring/inner part	TPE TPS
Gland body	Polyamide PA6 V-2
Connecting thread	metric, as per EN 60423

Properties

- reducing sealing ring for small cable diameter
- integrated anchorage
- wide sealing and clamping range
- easy-to-install
- UV- and weather resistance according UL 514B


Temperature range	-20 °C / +100 °C (dynamic) -40 °C (static, short term)
-------------------	---

Protection grade IP68 - 5 bar

Test standard UL 514B

UL / CSA-File E140310

Comment details about test results - see annex

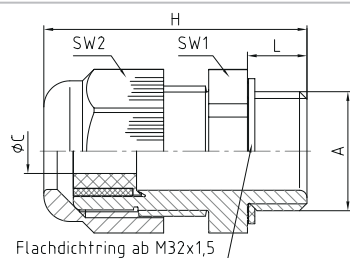

Merkmale

Characteristics

Anschlussgewinde Standardlänge

Connecting thread standard length

A	ØC mm	L mm	SW1 mm	SW2 mm	H mm		RAL 7001 silbergrau silver grey Art.-Nr. / Part No.	RAL 7035 lichtgrau light grey Art.-Nr. / Part No.	RAL 9005 tiefschwarz jet black Art.-Nr. / Part No.
M12x1,5	2 - 5*	8	15	15	31	100	50.612 PA/R	50.612PA/R7035	50.612 PA/RSW
M16x1,5	3 - 10	8	20	20	35,5	100	50.616 PA/R	50.616PA/R7035	50.616 PA/RSW
M20x1,5	5 - 13	8	24	24	36	100	50.620 PA/R	50.620PA/R7035	50.620 PA/RSW
M25x1,5	8 - 17	8	29	29	43	50	50.625 PA/R	50.625PA/R7035	50.625 PA/RSW
M32x1,5	12 - 21	10	36	36	50	25	50.632 PA/R	50.632PA/R7035	50.632 PA/RSW
M40x1,5	16 - 28	10	46	46	51	10	50.640 PA/R	50.640PA/R7035	50.640 PA/RSW
M50x1,5	21 - 35	12	55	55	61,5	5	50.650 PA/R	50.650PA/R7035	50.650 PA/RSW
M63x1,5	27 - 48	12	68	68	65,5	5	50.663 PA/R	50.663PA/R7035	50.663 PA/RSW

* Dichtring einteilig

* sealing ring one-piece