

TECHNISCHE DATEN:

Aufbau

Hutmutter	Messing bleifrei CuZn21Si3P, galv. vernickelt
Lamelleneinsatz	Polyamid PA6 V-2
Dichtring	Polychloropren-Nitrilkautschuk CR/NBR
Zwischenstutzen	Messing bleifrei CuZn21Si3P, galv. vernickelt
O-Ring	Nitrilkautschuk NBR
Anschlussgewinde	metrisch, nach EN 60423

Eigenschaften

- für Kabel und Leitungen mit Schirmung
- integrierte Zugentlastung
- Verdrehschutz
- großer Dicht- und Klemmbereich

Temperaturbereich	-20 °C / +100 °C (dynamisch) -40 °C (statisch, kurzzeitig)
-------------------	---

Schutzart	IP68 - 5 bar / IP69K*
Prüfnorm	EN 62444 / UL 514B
VDE-Ausweis	40020901
DNV Certificate	TAE0000386
UL / CSA-File	E140310
Hinweis	Angaben zu den Prüfergebnissen - siehe Anhang

TECHNICAL DATA:

Configuration


Dome nut	Brass lead-free CuZn21Si3P, nickel-plated
Lamellar insert	Polyamide PA6 V-2
Sealing ring	Polychloroprene-Nitrile rubber CR/NBR
Gland body	Brass lead-free CuZn21Si3P, nickel-plated
O-ring	Nitrile rubber NBR
Connecting thread	metric, as per EN 60423

Properties

- for cables with shielding
- integrated anchorage
- protection against twisting
- wide sealing and clamping range

Temperature range	-20 °C / +100 °C (dynamic) -40 °C (static, short term)
-------------------	---

Protection grade	IP68 - 5 bar / IP69K*
Test standard	EN 62444 / UL 514B
VDE licence	40020901
DNV Certificate	TAE0000386
UL / CSA-File	E140310
Comment	details about test results - see annex

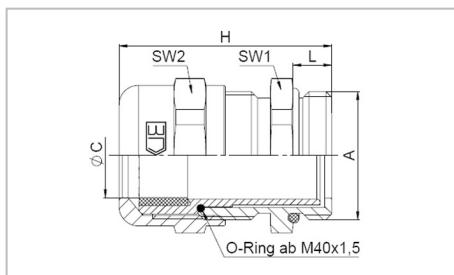

Merkmale

Characteristics

Anschlussgewinde Standardlänge

Connecting thread standard length

A	øC mm	L mm	SW1 mm	SW2 mm	H mm		Art.-Nr. / Part No.
M12x1,5	3 - 6	5	14	14	25	100	50.612 Y/EMV
M16x1,5	5 - 9	5	17	17	29	100	50.616 Y/EMV
M20x1,5	9 - 13	6	22	22	33	100	50.620 Y/EMV
M25x1,5	11 - 16	7	27	27	35	50	50.625 Y/EMV
M32x1,5	14 - 20	8	34	34	42	25	50.632 Y/EMV
M40x1,5	19 - 27	8	43	43	42	10	50.640 Y/EMV
M50x1,5	24 - 35	9	55	55	50	5	50.650 Y/EMV
M63x1,5	32 - 42	10	65	65	52,5	5	50.663 Y/EMV
M63x1,5	38 - 48	10	65	65	52,5	5	50.663 Y1/EMV

Anschlussgewinde lang

Connecting thread long

A	øC mm	L mm	SW1 mm	SW2 mm	H mm		Art.-Nr. / Part No.
M12x1,5	3 - 6	10	14	14	30	100	50.612 Y/EMV/L
M16x1,5	5 - 9	10	17	17	34	100	50.616 Y/EMV/L
M20x1,5	9 - 13	10	22	22	37	100	50.620 Y/EMV/L
M25x1,5	11 - 16	11	27	27	39	50	50.625 Y/EMV/L
M32x1,5	14 - 20	13	34	34	47	25	50.632 Y/EMV/L
M40x1,5	19 - 27	13	43	43	47	10	50.640 Y/EMV/L
M50x1,5	24 - 35	14	55	55	55	5	50.650 Y/EMV/L
M63x1,5	32 - 42	14	65	65	56,5	5	50.663 Y/EMV/L
M63x1,5	38 - 48	14	65	65	56,5	5	50.663 Y1/EMV/L

*IP69K geprüft für M12 - M25, M50, M63

*IP69K tested for M12 - M25, M50, M63