
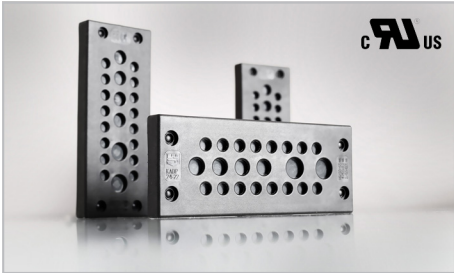


TECHNISCHE DATEN:	
Aufbau	
Flanschrahmen	Polyamid PA66 GF25 V-0
Elastomerplatte	EPDM entspricht folgenden Automobilnormen: VW 2.8.1 G50, DBL 5556.10; DBL 5556.20; DBL 5556.21; ozonbeständig nach DIN 53509, Stufe 0 (beste Stufe)
Dichtung	TPE TPV
Eigenschaften	
Technik	werkzeugfreie Anschlusstechnik zum Verkabeln von Maschinen und Anlagen
Anwendung	es können Kabel und Leitungen, Schläuche, Pneumatik- und Hydraulikleitungen eingeführt werden
Temperaturbereich	-30 °C / +100 °C
Schutzart	IP66
Prüfnorm	UL 514B
UL / CSA-File	E140310
Außenmaße	L = 147,5 mm, L1 = 59,5 mm, H = 25 mm, H1 = 8,2 mm

TECHNICAL DATA:	
Configuration	
Flange	Polyamide PA66 GF25 V-0
Elastomeric plate	EPDM according to automotive standards: VW 2.8.1 G50, DBL 5556.10; DBL 5556.20; DBL 5556.21; ozone resistant according to DIN 53509, level 0 (best level)
Sealing	TPE TPV
Properties	
Technology	tool-free connecting technology for cabling of machines and equipment
Application	for introduction of cables, tubes, pneumatic and hydraulic pipes
Temperature range	-30 °C / +100 °C
Protection grade	IP66
Test standard	UL 514B
UL / CSA-File	E140310
Overall dimension	L = 147,5 mm, L1 = 59,5 mm, H = 25 mm, H1 = 8,2 mm

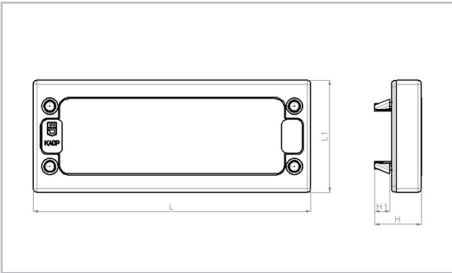

Merkmale		Characteristics												
Bezeichnung Description	Anzahl der Öffnungen auf der Kabeldurchführungsplatte passend für Leitungsdurchmesser Number of entries on the cable entry plate suitable for cable diameter												 schwarz black Art.-Nr. / Part. No.	
	1,5	2,5	3,0	3,0	4,1	5,0	8,0	8,0	9,0	9,6	14,0			
	-	-	-	-	-	-	-	-	-	-	-			
	2,6	5,0	5,5	6,5	8,1	9,2	12,0	12,5	14,0	15,9	20,0			
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm			
KADP 24/11				4		4		3				1	F305-9240-00	
KADP 24/12				12								1	F305-9240-01	
KADP 24/13				2		6		4		1		1	F305-9240-02	
KADP 24/14				6		4		4				1	F305-9240-03	
KADP 24/17				17								1	F305-9240-04	
KADP 24/17-1				11		1		5				1	F305-9240-05	
KADP 24/22				16		4		2		1				F305-9240-06
KADP 24/23				23								1	F305-9240-07	
KADP 24/29				29								1	F305-9240-08	
KADP 24/BLI												1	F305-9240-99	

Lochmaß / Hole dimensions

