


TECHNISCHE DATEN:

Aufbau	TPE TPV
Tülle	
Eigenschaften	• Zubehör für die Kabeldurchführungsleiste KADL (Serie F310-9xxx-zz) • durch die geschlitzten Tüllen können konfektionierte Leitungen mit Stecker in Gehäuse eingeführt und abgedichtet werden • für Leitungen mit $\varnothing C = 3 - 10\text{ mm}$ • Tüllen mit absolutem Klemmbereich von 3 mm und 4 mm • werkzeugfreie Montage • problemlose Nachrüstungen und Anpassungen
Temperaturbereich	-30 °C / +100 °C
Schutzart	IP42 im eingebauten Zustand in der KADL
Hinweis	Die Tüllen sind als Zubehör für die Kabeldurchführungsleiste KADL separat zu bestellen

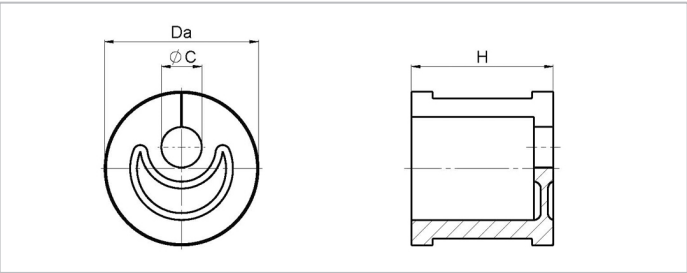

TECHNICAL DATA:

Configuration	TPE TPV
Grommet	
Properties	• Accessories for Cable Entry System KADL (series F310-9xxx-zz) • due to the split grommets, pre-assembled cables with connectors can be inserted into housings and sealed • for cables with $\varnothing C = 3 - 10\text{ mm}$ • Grommets with absolute clamping ranges of 3 mm and 4 mm • tool-free assembly • easy enlargements and adjustments
Temperature range	-30 °C / +100 °C
Protection grade	IP42 when installed in KADL
Comment	The grommets shall be ordered separately as accessories for Cable Entry System KADL



Merkmale				Characteristics		
Tülle klein				Grommet small		
Bezeichnung Description	$\varnothing C$ mm	H mm	Da mm			schwarz black Art.-Nr. / Part No.
TK 3-6	3 - 6	20	21,7	10		F311-9003-01
TK 6-10	6 - 10	20	21,7	10		F311-9003-02