


Singlemode pigtails

FC, ST, SC, LC, MTRJ, E2000,
FC/APC, SC/APC, LC/APC, E2000/APC

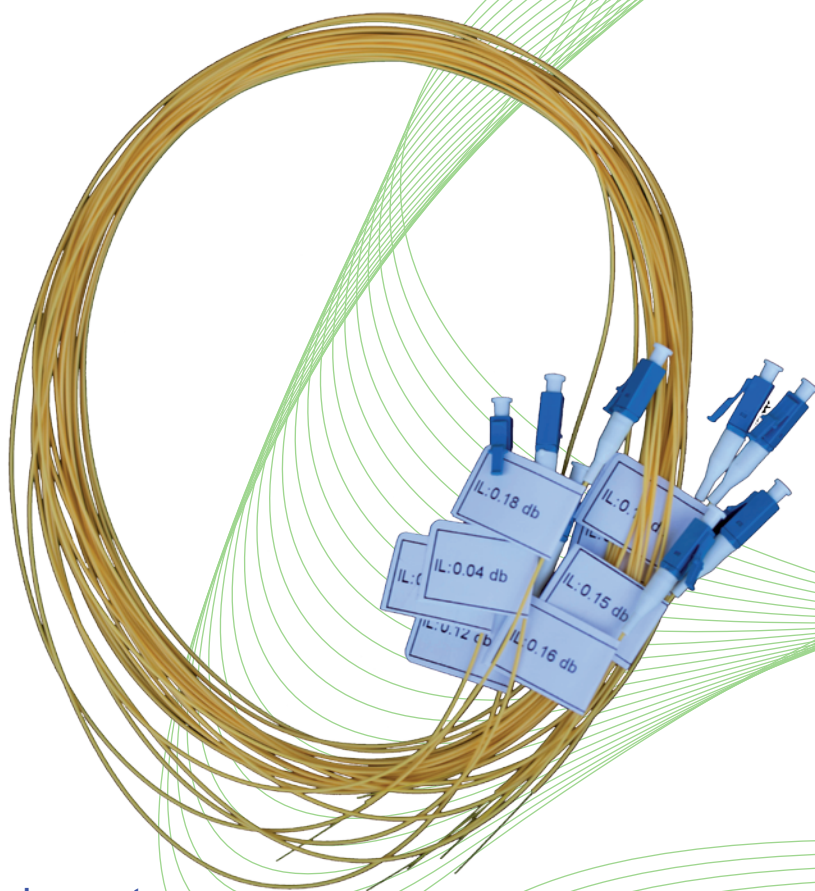

Technical parameters



insertion loss (dB)	0,2	0,3
return loss (dB) PC / APC	55 / 75	45 / 65
repeatability	< 0.1	
durability	1000	
operating temperature	-40°C to +75°C	
interferometry tests	according to IEC 61300-3-17	
length (m)	standard 1.5, other on request	
diameter of cable	standard 0.9mm other on request	
cable type	simplex, duplex; PVC (standard) or LSZH (on request)	
boot color (PC / APC)	blue / green	
cable color	G.652D yellow, G.655 red, other on request	

APPLICATION:

- CATV, and Multimedia
- Telecommunication networks
- Active device interface
- Sensor system
- Interconnection for O/E modules
- Data processing networks
- Industrial and medical
- Premise installations

FEATURES:

- Low insertion loss / back reflection
- Good exchangeability
- Good Durability
- High temperature stability
- easy strip (tight buffer on request)
- 8 pieces per bag

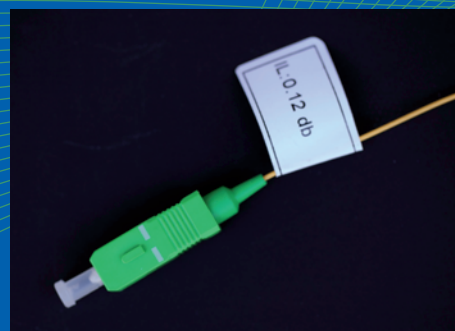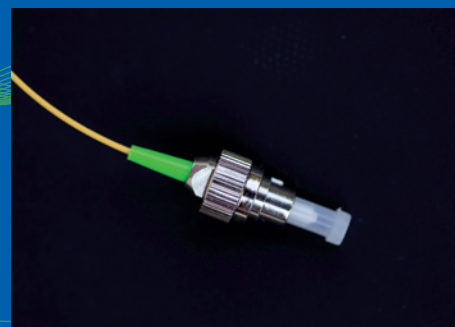

ordering options

for example: FPT99-E2A-015

FP	T	9	9	L	-	FC	-	015
	TD	8	N			ST		
		2				SC		
		4				LC		
		3				MJ		
						E2		
						FCA		
						SCA		
						LCA		
						E2A		
simplex		900µ		LSZH				length in m
duplex		1.8mm	G652D	(opt)				02 = 2m, 015 = 1.5m
		2mm	G655 (leaf)					10 = 10m
		2.4mm						
		3mm						