



GRUBER Electric Ges.m.b.H. ■ Features :

A-2542 KOTTINGBRUNN, INDUSTRIESTRASSE 4
Tel. +43-2252-251080-0 / Fax +43-2252-251080-30
Internet: www.gruber-electric.at Email: office@gruber-electric.at
Komponenten für Steuerungsbau und Industrieelektronik





- High efficiency 91% and low power dissipation
- 150% peak load capability
- Built-in active PFC function, PF>0.93
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Cooling by free air convection
- Can be installed on DIN rail TS-35/7.5 or 15
- UL 508 (industrial control equipment) approved
- EN61000-6-2(EN50082-2) industrial immunity level
- Built-in DC OK relay contact
- 100% full load burn-in test
- 3 years warranty




SPECIFICATION

MODEL		SDR-120-12		SDR-120-24		SDR-120-48	
OUTPUT	DC VOLTAGE	12V		24V		48V	
	RATED CURRENT	10A		5A		2.5A	
	CURRENT RANGE	0 ~ 10A		0 ~ 5A		0 ~ 2.5A	
	RATED POWER	120W		120W		120W	
	PEAK CURRENT	15A		7.5A		3.75A	
	PEAK POWER Note.6	180W (3 sec.)					
	RIPPLE & NOISE (max.) Note.2	100mVp-p		100mVp-p		120mVp-p	
	VOLTAGE ADJ. RANGE	12 ~ 14V		24 ~ 28V		48 ~ 55V	
	VOLTAGE TOLERANCE Note.3	±1.0%		±1.0%		±1.0%	
	LINE REGULATION	±0.5%		±0.5%		±0.5%	
	LOAD REGULATION	±1.0%		±1.0%		±1.0%	
	SETUP, RISE TIME	1500ms, 60ms/230VAC 3000ms, 60ms/115VAC at full load					
HOLD UP TIME (Typ.)	20ms/230VAC 20ms/115VAC at full load						
INPUT	VOLTAGE RANGE Note.7	88 ~ 264VAC 124 ~ 370VDC					
	FREQUENCY RANGE	47 ~ 63Hz					
	POWER FACTOR (Typ.)	0.93/230VAC		0.96/115VAC at full load			
	EFFICIENCY (Typ.)	89%		91%		90.5%	
	AC CURRENT (Typ.)	1.4A/115VAC 0.7A/230VAC					
	INRUSH CURRENT (Typ.)	35A/115VAC 70A/230VAC					
	LEAKAGE CURRENT	<1mA / 240VAC					
PROTECTION	OVERLOAD	Normally works within 110 ~ 150% rated output power for more than 3 seconds and then shut down o/p voltage >150% rated power, constant current limiting with auto-recovery within 3 seconds and shut down o/p voltage after 3 seconds					
	OVER VOLTAGE	14 ~ 17V		29 ~ 33V		56 ~ 65V	
		Protection type : Shut down o/p voltage, re-power on to recover					
	OVER TEMPERATURE	95℃±5℃ (TSW : detect on heatsink of power switch) Protection type : Shut down o/p voltage, recovers automatically after temperature goes down					
FUNCTION	DC OK RELAY CONTACT RATINGS (max.)	60Vdc/0.3A, 30Vdc/1A, 30Vac/0.5A resistive load					
ENVIRONMENT	WORKING TEMP.	-25 ~ +70℃ (Refer to output load derating curve)					
	WORKING HUMIDITY	20 ~ 95% RH non-condensing					
	STORAGE TEMP., HUMIDITY	-40 ~ +85℃, 10 ~ 95% RH					
	TEMP. COEFFICIENT	±0.03%/℃ (0 ~ 50℃)					
	VIBRATION	Component:10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes; Mounting: Compliance to IEC60068-2-6					
SAFETY & EMC (Note 4)	SAFETY STANDARDS	UL508, TUV EN60950-1 approved					
	WITHSTAND VOLTAGE	I/P-O/P:3KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC O/P-DC OK:0.5KVAC					
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:>100M Ohms / 500VDC / 25℃ / 70% RH					
	EMI CONDUCTION & RADIATION	Compliance to EN55022 (CISPR22) Class B					
	HARMONIC CURRENT	Compliance to EN61000-3-2,-3					
	EMS IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11, ENV50204, EN55024, EN61000-6-2 (EN50082-2), EN61204-3, heavy industry level, criteria A, SEMI F47, GL approved					
OTHERS	MTBF	289.9Khrs min. MIL-HDBK-217F (25℃)					
	DIMENSION	40*125.2*113.5mm (W*H*D)					
	PACKING	0.67Kg; 20pcs/14.4Kg/1.16CUFT					
NOTE	1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25℃ of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. 5. Installation clearances : 40mm on top, 20mm on the bottom, 5mm on the left and right side are recommended when loaded permanently with full power. In case the adjacent device is a heat source, 15mm clearance is recommended. 6. 3 seconds max., please refer to peak loading curves. 7. Derating may be needed under low input voltage. Please check the derating curve for more details.						


Peak Loading

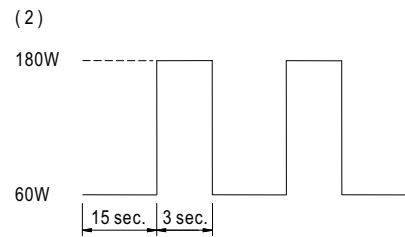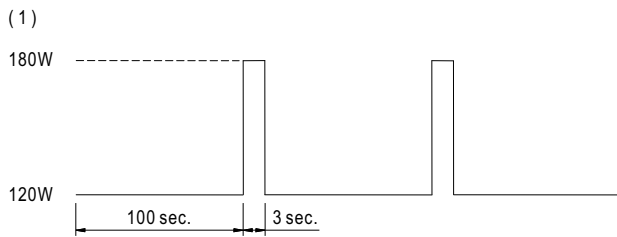

Derating Curve

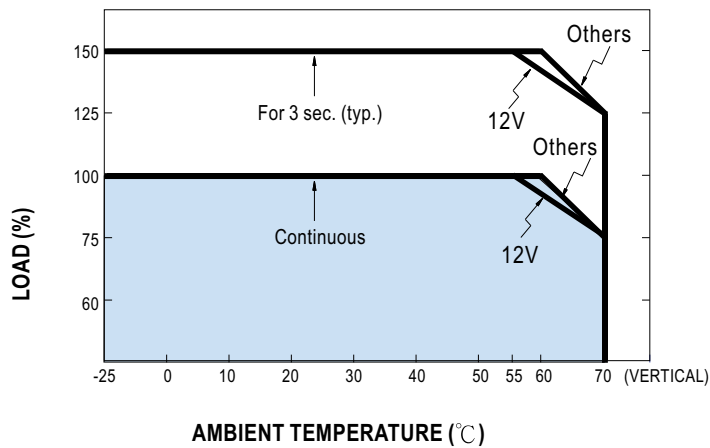

Output derating VS input voltage

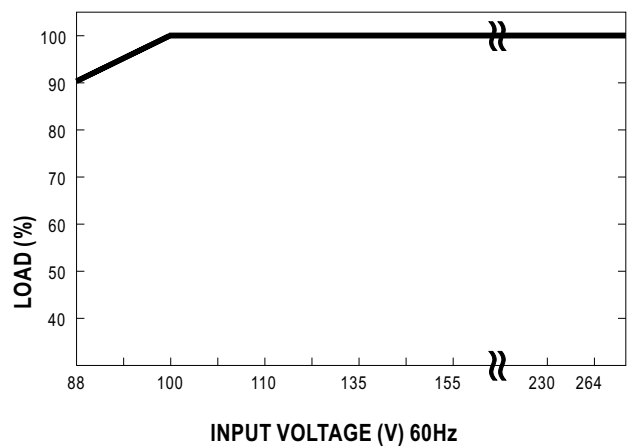

GRUBER Electric Ges.m.b.H.

A-1230 Wien, Eduard Kittenberger Gasse 97 Top 2

Tel. +43 1 8692339 / Fax +43 1 8651875

Internet: www.gruber-electric.at E-Mail: office@gruber-electric.at

Komponenten für Steuerungsbau und Industrieelektronik