


**120W Single Output Industrial DIN RAIL Power Supply**


- Single and two phase wide input range 180 ~ 550VAC
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Cooling by free air convection
- Built-in constant current limiting circuit
- Can be installed on DIN rail TS-35/7.5 or 15
- UL508(industrial control equipment)approved
- EN61000-6-2(EN50082-2) industrial immunity level
- 100% full load burn-in test
- Built-in DC OK relay contact
- 3 years warranty

**SPECIFICATION**


SPECIFICATION				
MODEL		WDR-120-12	WDR-120-24	WDR-120-48
OUTPUT	DC VOLTAGE	12V	24V	48V
	RATED CURRENT	10A	5A	2.5A
	CURRENT RANGE	0 ~ 10A	0 ~ 5A	0 ~2.5A
	RATED POWER	120W	120W	120W
		120mVp-p	120mVp-p	150mVp-p
	VOLTAGE ADJ. RANGE	12 ~ 15V	24 ~ 29V	48 ~ 58V
		±1.5%	±1.0%	±1.0%
	LINE REGULATION	±0.5%	±0.5%	±0.5%
	LOAD REGULATION	±0.5%	±0.5%	±0.5%
SETUP, RISE, HOLD UP TIME		2000ms, 70ms, 50ms/400VAC 2000ms, 70ms, 10ms/230VAC at full load		
INPUT	VOLTAGE RANGE	180 ~ 550VAC 254 ~ 780VDC		
	FREQUENCY RANGE	47 ~ 63Hz		
	EFFICIENCY (Typ.)	89.5% / 400V	91% / 400V	92% / 400V
	AC CURRENT	0.55A/400VAC 1.2A/230VAC		
	INRUSH CURRENT (max.)	COLD START 50A		
LEAKAGE CURRENT		<3.5mA / 530VAC		
	OVERLOAD	105 ~ 130% rated output power		
		Protection type : Constant current limiting, recovers automatically after fault condition is removed		
	OVER VOLTAGE	16 ~ 18V	31 ~ 37V	60 ~ 67V
		Protection type : Shut down o/p voltage, re-power on to recover		
OVER TEMPERATURE	105℃ ±5℃ (12V), 110℃ ±5℃ (24V) (TSW1) detect on heatsink of power transistor ; 100℃ ±5℃ (48V) (TSW1) detect on heatsink of power diode			
	Protection type : Shut down o/p voltage, recovers automatically after temperature goes down			
FUNCTION	DC OK SIGNAL	Relay contact rating(max.) : 30V / 1A resistive		
	WORKING TEMP.	-25 ~ +70℃ (Refer to output load derating curve)		
	WORKING HUMIDITY	20 ~ 90% RH non-condensing		
	STORAGE TEMP., HUMIDITY	-40 ~ +85℃, 10 ~ 95% RH		
	TEMP. COEFFICIENT	±0.03%/℃ (0 ~ 50℃)		
	VIBRATION	Component: 10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes; Mounting clip: Compliance to IEC60068-2-6		
SAFETY STANDARDS	UL508 approved, IEC60950-1 CB approved by SIQ, design refer to GL			
	WITHSTAND VOLTAGE			
	I/P-O/P:3KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC O/P-DC OK:0.5KVAC			
	ISOLATION RESISTANCE			
	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25℃ / 70% RH			
	Compliance to EN55011 (CISPR11), EN55022 (CISPR22), EN61204-3 Class B			
	EMS IMMUNITY			
	Compliance to EN61000-4-2,3,4,5,6,8,11, ENV50204, EN61204-3, EN61000-6-2 (EN50082-2), heavy industry level, criteria A			
	OTHERS	MTBF		
		268Khrs min. MIL-HDBK-217F (25℃)		
DIMENSION				
40*125.2*113.5mm (W*H*D)				
PACKING				
0.65Kg; 20pcs/14Kg/1.16CUFT				
NOTE	℃			

Mechanical Specification

Case No.992B Unit:mm

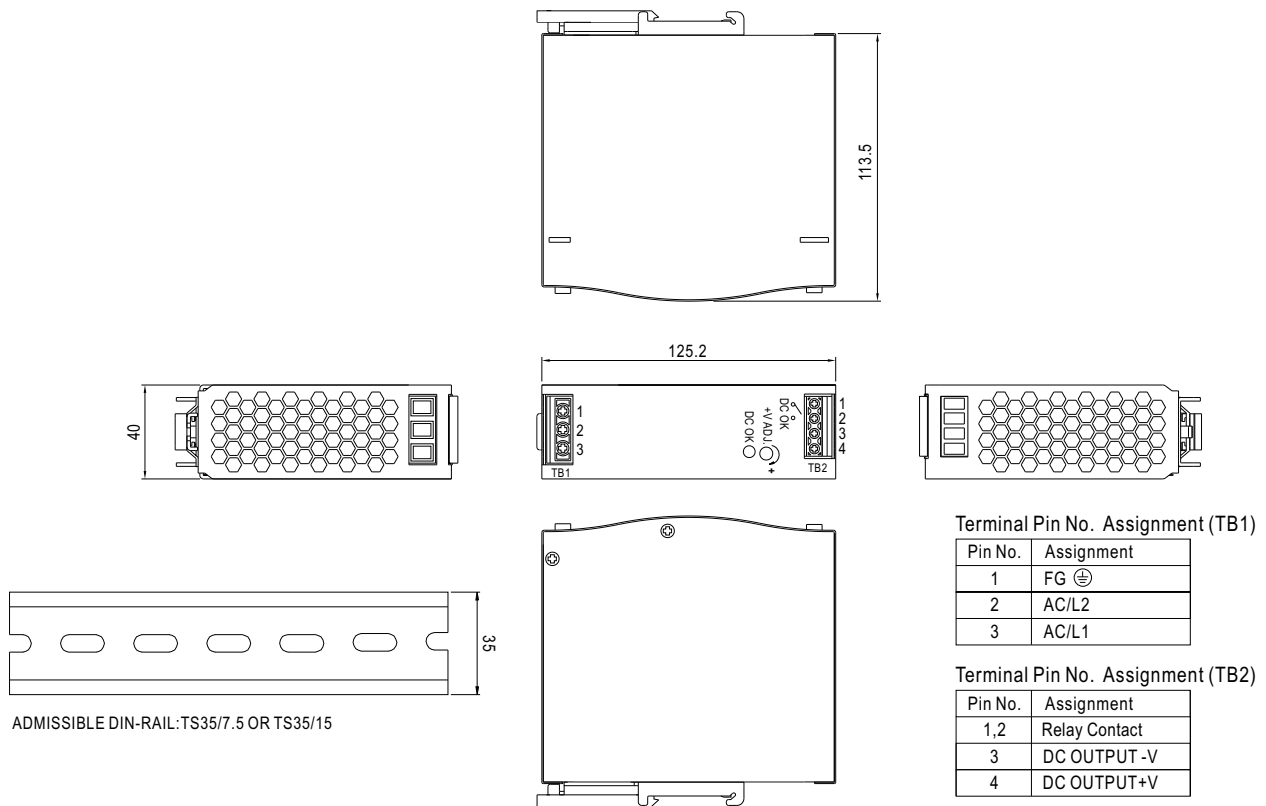

Block Diagram

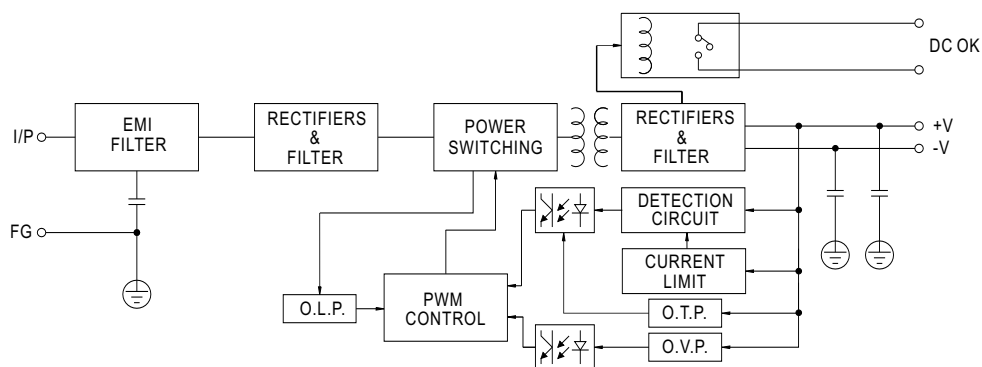

DC OK Relay Contact


Contact Close	PSU turns on / DC OK.
Contact Open	PSU turns off / DC Fail.
Contact Ratings (max.)	30V/1A resistive load.



120W Single Output Industrial DIN RAIL Power Supply

WDR-120 series

■ Derating Curve

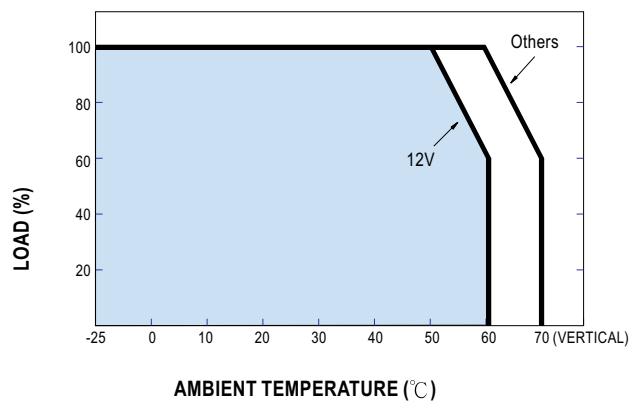

■ Static Characteristics

