
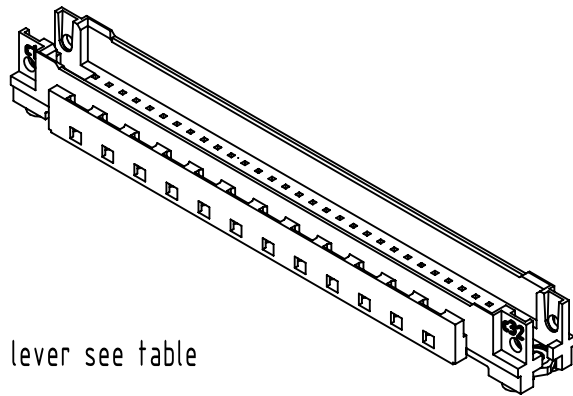
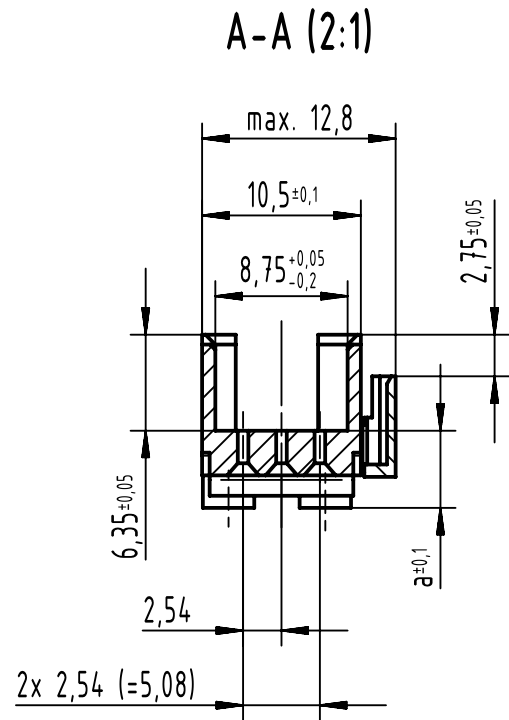
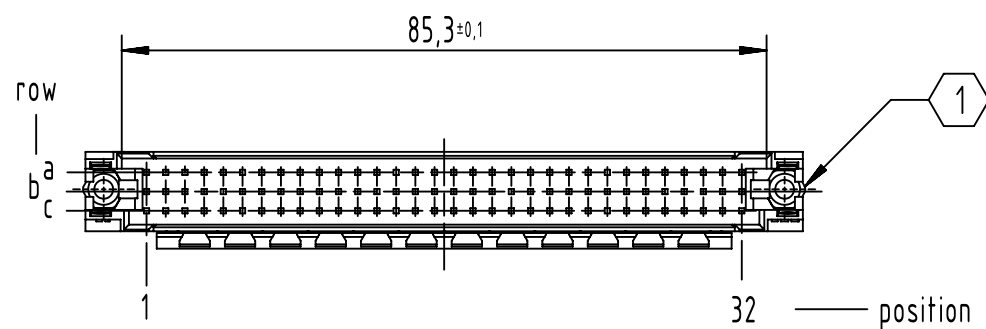
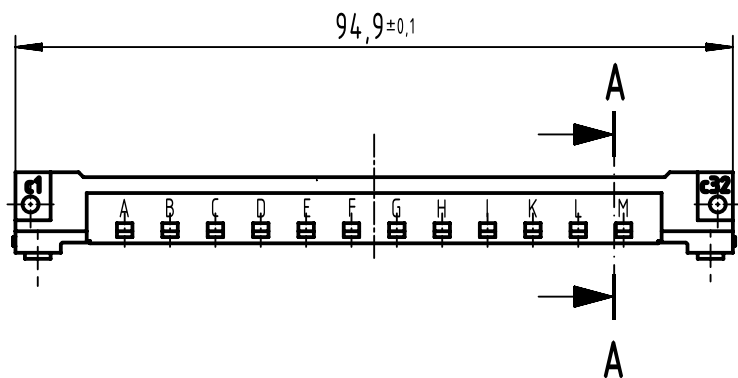


	1	2	3	4	5	6	7	8
	no.	part no.	PCB-thickness	contact length	a±0,1	screw length		
A	1	---*	3,8±0,5	20,0 ^{+0,25} _{-0,05}	11,75	17,6±0,5		
	2	---*	1,8±0,5	17,0 ^{+0,25} _{-0,05}	10,7	14,6±0,5		
B			4,8±0,5	20,0 ^{+0,25} _{-0,05}		17,6±0,5		
	3	---*	1,8±0,5	16,2 ^{+0,25} _{-0,05}	9,9	13,8±0,5		
			2,6±0,5	17,0 ^{+0,25} _{-0,05}		14,6±0,5		
			5,6±0,5	20,0 ^{+0,25} _{-0,05}		17,6±0,5		
C	4	---*	2,6±0,5	16,2 ^{+0,25} _{-0,05}	9,1	13,8±0,5		
			3,4±0,5	17,0 ^{+0,25} _{-0,05}		14,6±0,5		
			6,4±0,5	20,0 ^{+0,25} _{-0,05}		17,6±0,5		
D	5	---*	3,4±0,5	16,2 ^{+0,25} _{-0,05}	8,3	13,8±0,5		
			4,2±0,5	17,0 ^{+0,25} _{-0,05}		14,6±0,5		
			7,2±0,5	20,0 ^{+0,25} _{-0,05}		17,6±0,5		
E	6	---*	4,2±0,5	16,2 ^{+0,25} _{-0,05}	7,5	13,8±0,5		
			5,0±0,5	17,0 ^{+0,25} _{-0,05}		14,6±0,5		
			8,0±0,5	20,0 ^{+0,25} _{-0,05}		17,6±0,5		
F	7	97000005213	1,8±0,5	13,0 ^{+0,25} _{-0,05}	6,7	10,6±0,5		
			5,0±0,5	16,2 ^{+0,25} _{-0,05}		13,8±0,5		
			5,8±0,5	17,0 ^{+0,25} _{-0,05}		14,6±0,5		
G	8	---*	2,6±0,5	13,0 ^{+0,25} _{-0,05}	5,9	10,6±0,5		
			5,8±0,5	16,2 ^{+0,25} _{-0,05}		13,8±0,5		
			6,6±0,5	17,0 ^{+0,25} _{-0,05}		14,6±0,5		
H	9	09030019968	3,4±0,5	13,0 ^{+0,25} _{-0,05}	5,1	10,6±0,5		
			6,6±0,5	16,2 ^{+0,25} _{-0,05}		13,8±0,5		
			7,4±0,5	17,0 ^{+0,25} _{-0,05}		14,6±0,5		
I	10	---*	4,2±0,5	13,0 ^{+0,25} _{-0,05}	4,3	10,6±0,5		
			7,4±0,5	16,2 ^{+0,25} _{-0,05}		13,8±0,5		
			8,2±0,5	17,0 ^{+0,25} _{-0,05}		14,6±0,5		

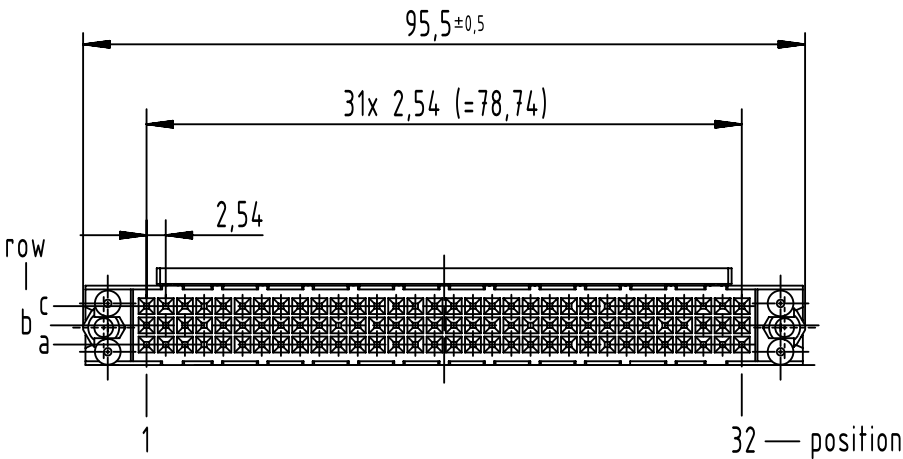

---* = part number available on request

1 hexagon thin nut ISO 4035-M2,5-04, pre-assembled
recommended screw length for applications with locking lever see table
tightening torque max. 20Ncm

		All Dimensions in mm Original Size DIN A3		Scale 1:1	Free size tol.	Ref.		
						Sub.		
	All rights reserved		Created by 101441	Inspected by lehner	Standardisation	Date 23-Sep-2025	State 40 - Released	
	Department EL PD		Title DIN Signal type C/R shroud screw-fixing w. nut, coding				Doc-Key / ECM-Nr. DS00178484	
HARTING D-32339 Espelkamp		Type TB	Design Number DS00178484		SAP Mat. Number ---		Rev. G	Page 1/1