

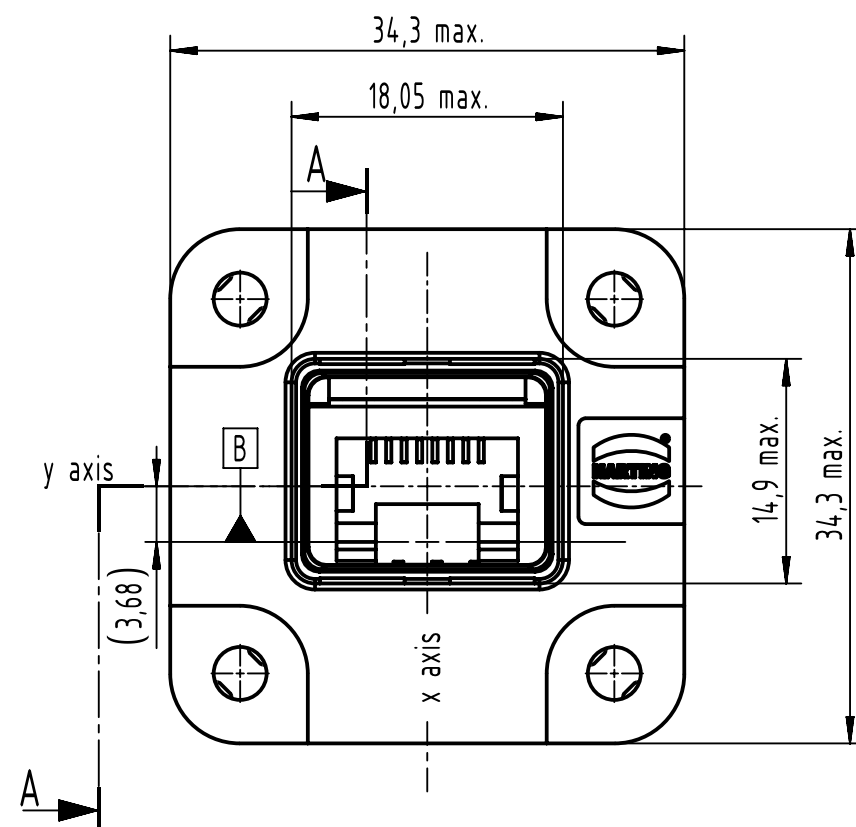
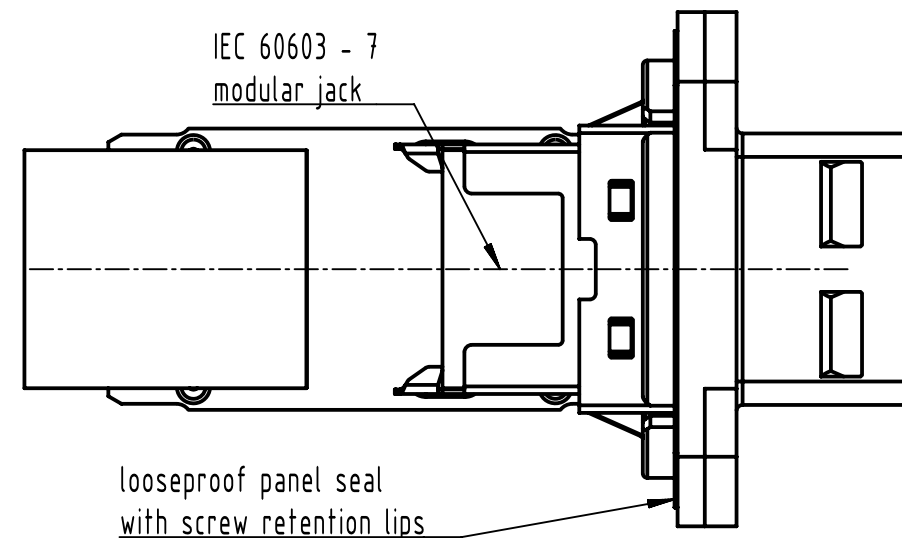
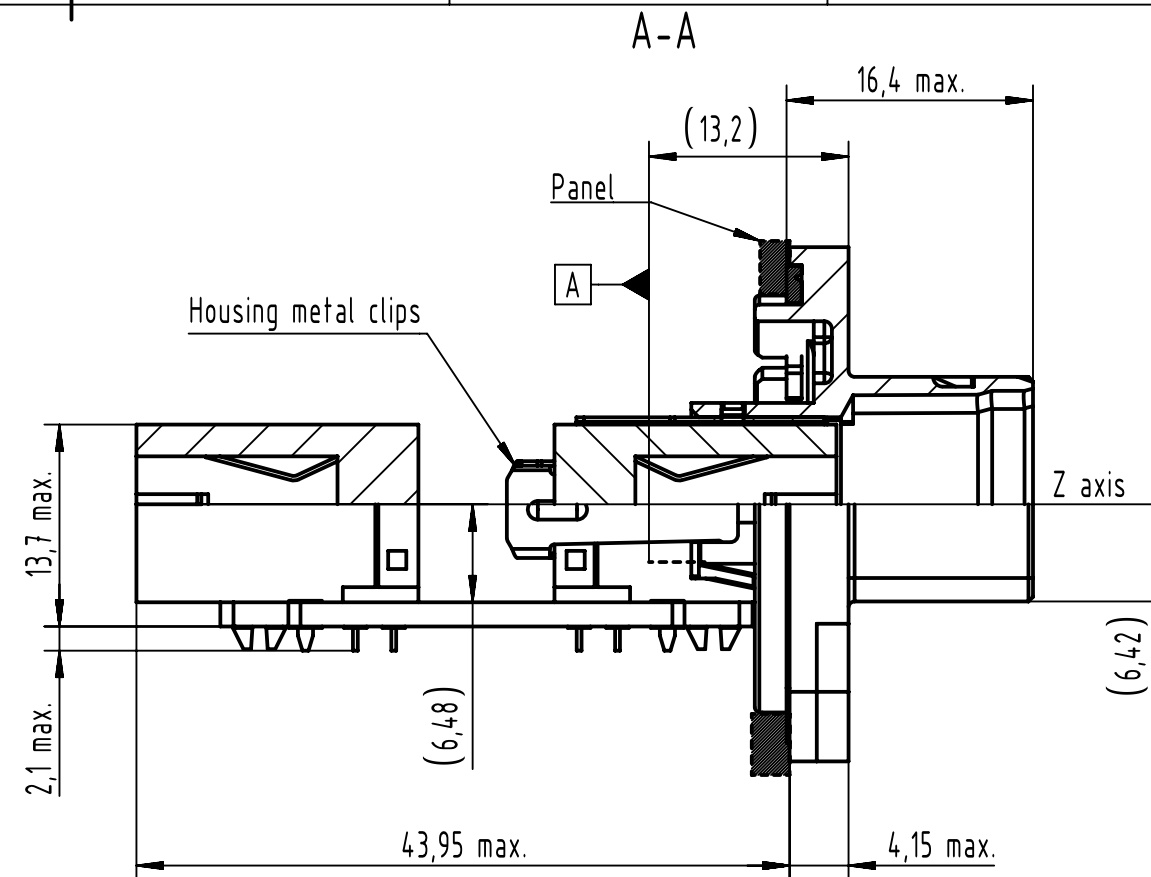


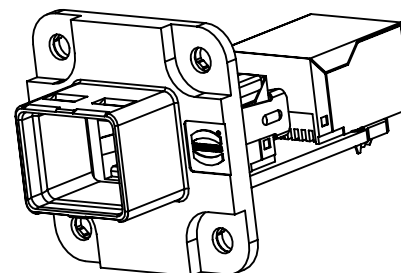

Panel cutting

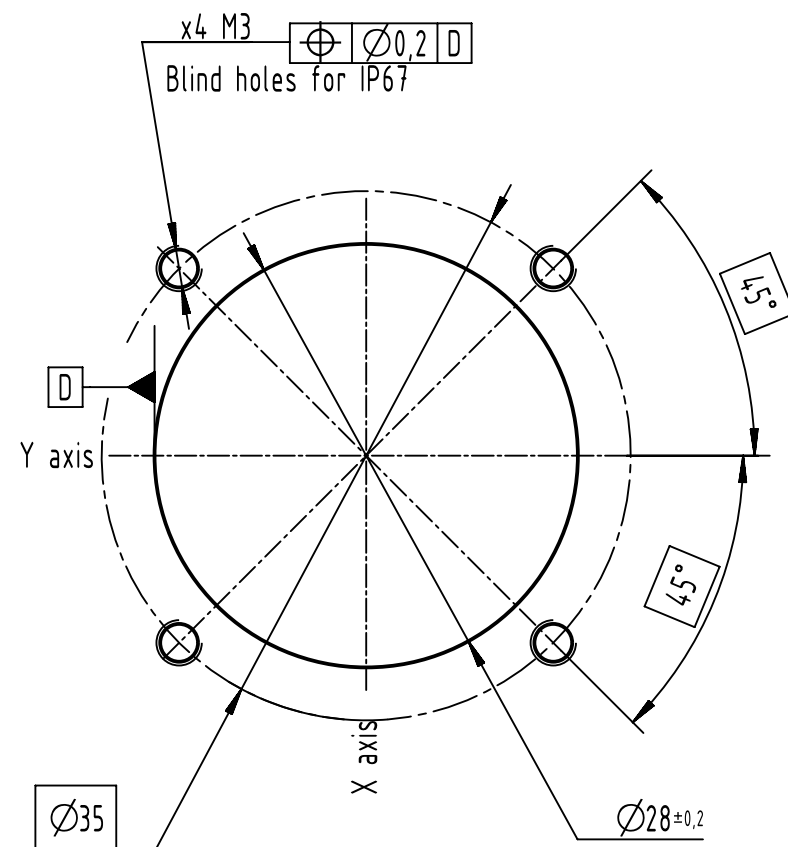

Connector pitches on panel = 35 mm
 Receptacle mating face acc. to IEC 61076-3-106 - variant 04
 jack references A and B according to IEC 60603-7
 the jack is located in the housing in the X,Y,Z axis after locking clips.
 The assembled PC Board is delivered to customers not assemblies with the housing.
 Screwing by x4 M3 screws with flat washer
 Recommended screwing torque for IP67=0.5 N.m mini

	All Dimensions in mm Original Size DIN A3		Scale 2:1	Free size tol.		Ref.	
	All rights reserved		Created by 404270	Inspected by serbana	Standardisation	Date 10-Nov-2025	State 40 - Released
Department EL PD		Title HPP V4 RJ45 Cat5 EI-PFT 8p, metal					Doc-Key / ECM-Nr. DS00189770
HARTING D-32339 Espelkamp		Type TB	Design Number DS00189770		SAP Mat. Number 09452951130		Rev. D
						Page 1/1	