

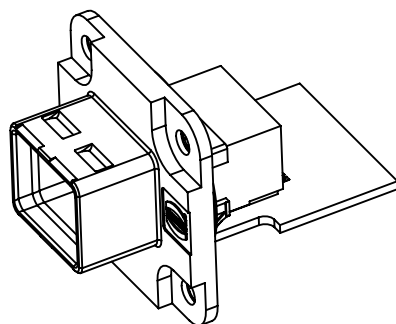
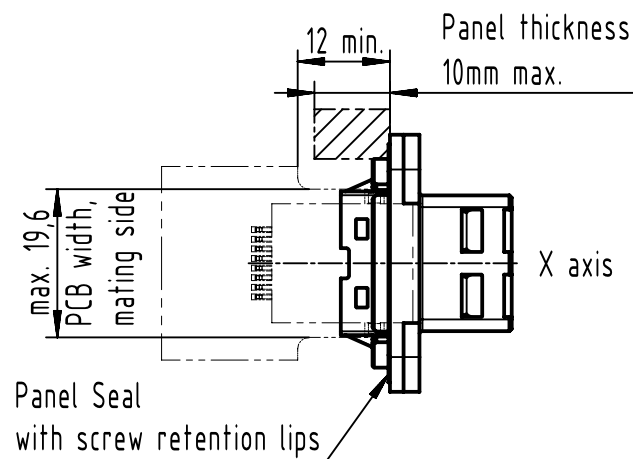
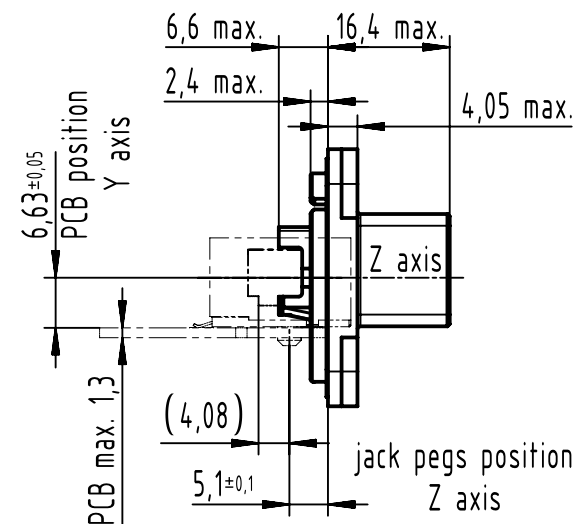
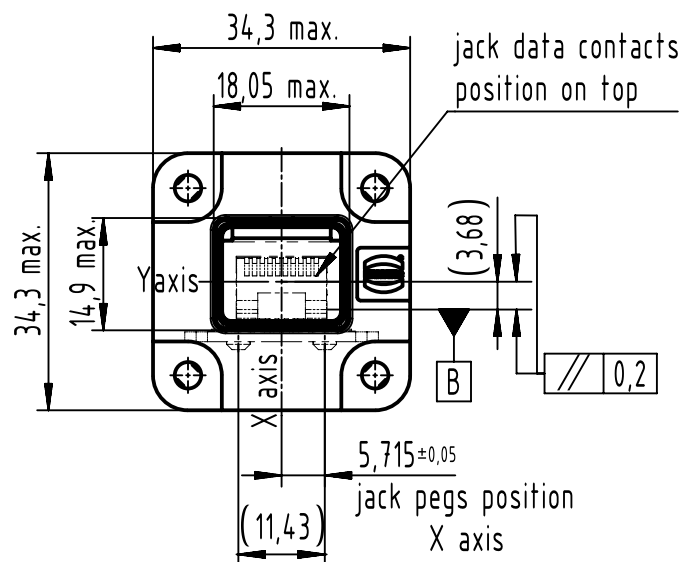
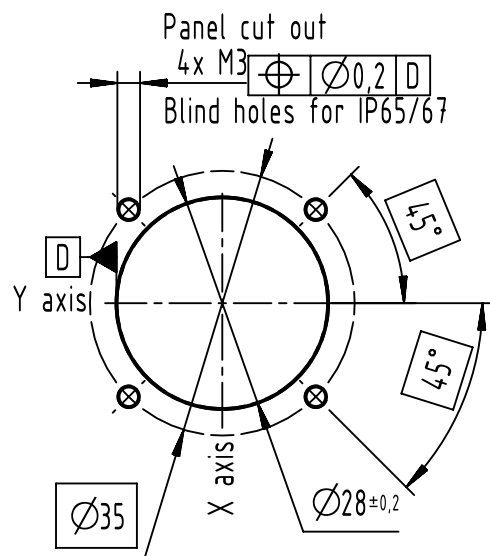
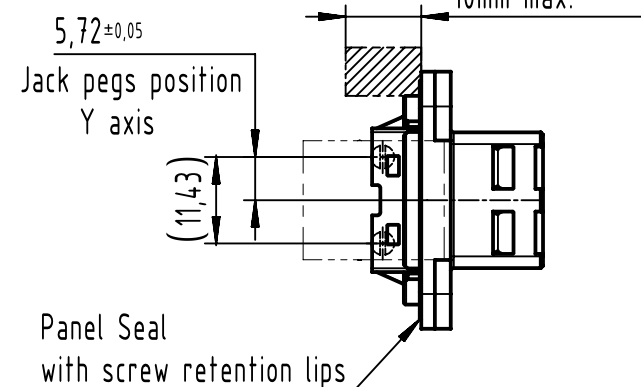
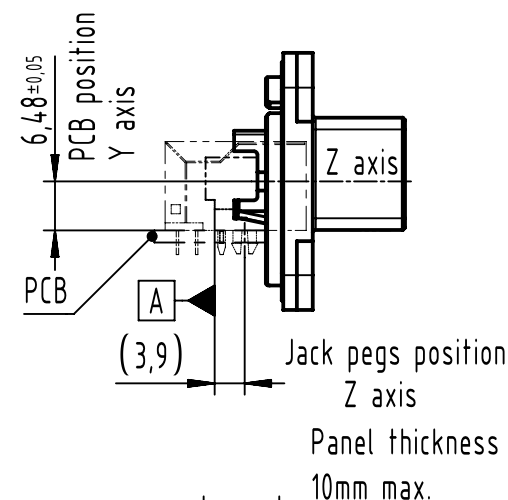
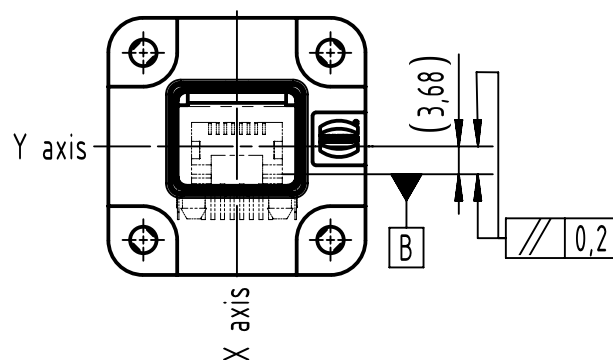




Connector pitches on panel = 35mm
Receptacle mating face according to IEC 61076-3-106 - variant 04
Jack A and B references according to IEC 60603-7
Position dimensions for Harting and jack P/N 09 45 551 1100/1110
ppcb Layout see TB 09 45 551 1100
Screwing by x4 M3 screws with flat washer
Recommended screwing torque for IP67: 0,5 N.m min.

		All Dimensions in mm Original Size DIN A4		Scale 1:1		Free size tol.		Ref.					
								Sub.					
		All rights reserved		Created by zwahr		Inspected by serbana		Standardisation		Date 26-Mar-2026		State 40 - Released	
HARTING D-32339 Espelkamp		Department EL PD		Title HPP Metal receptacle without adapter								Doc-Key / ECM-Nr. DS00188402	
				Type TB		Design Number DS00188402		SAP Mat. Number 09455950030 MS		Rev. B		Page 1/2	

Panel cut out

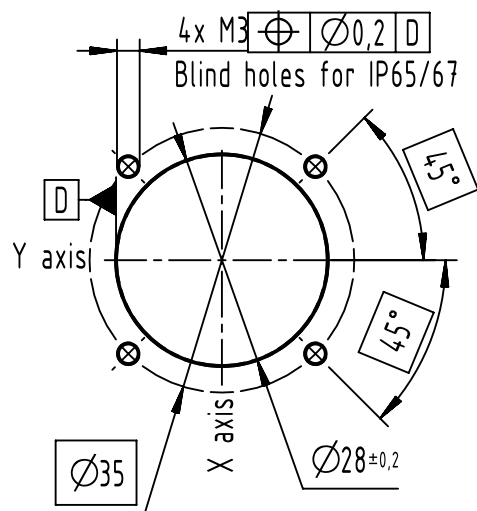

Connector pitches on panel = 35mm
 Receptacle mating face according to
 IEC 61076-3-106 - variant 04
 Jack A and B references according to IEC 60603-7
 Position dimensions for
 Harting and jack P/N 09 45 551 1102
 ppcb Layout see TB 09 45 551 1102
 Receptacle fixing on panel with
 x4 M3 screws with flat washers
 Recommended screwing torque for IP65/67: 0,5 N.m

		All Dimensions in mm Original Size DIN A4		Scale 1:1		Free size tol.		Ref.					
								Sub.					
		All rights reserved		Created by zwahr		Inspected by serbana		Standardisation		Date 26-Mar-2026		State 40 - Released	
		Department EL PD											
				Title HPP Metal receptacle without adapter								Doc-Key / ECM-Nr. DS00188402	
				Type TB		Design Number DS00188402			SAP Mat. Number 09455950030 MS			Rev. B	