

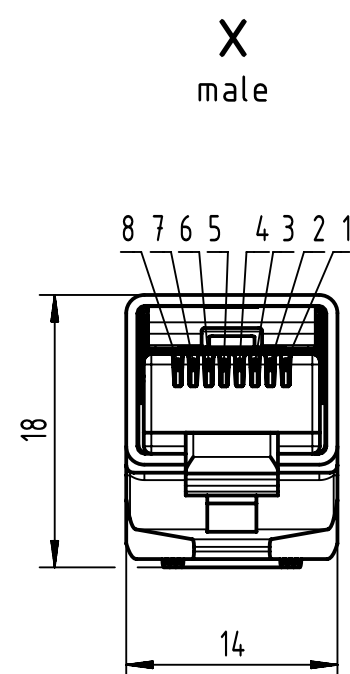
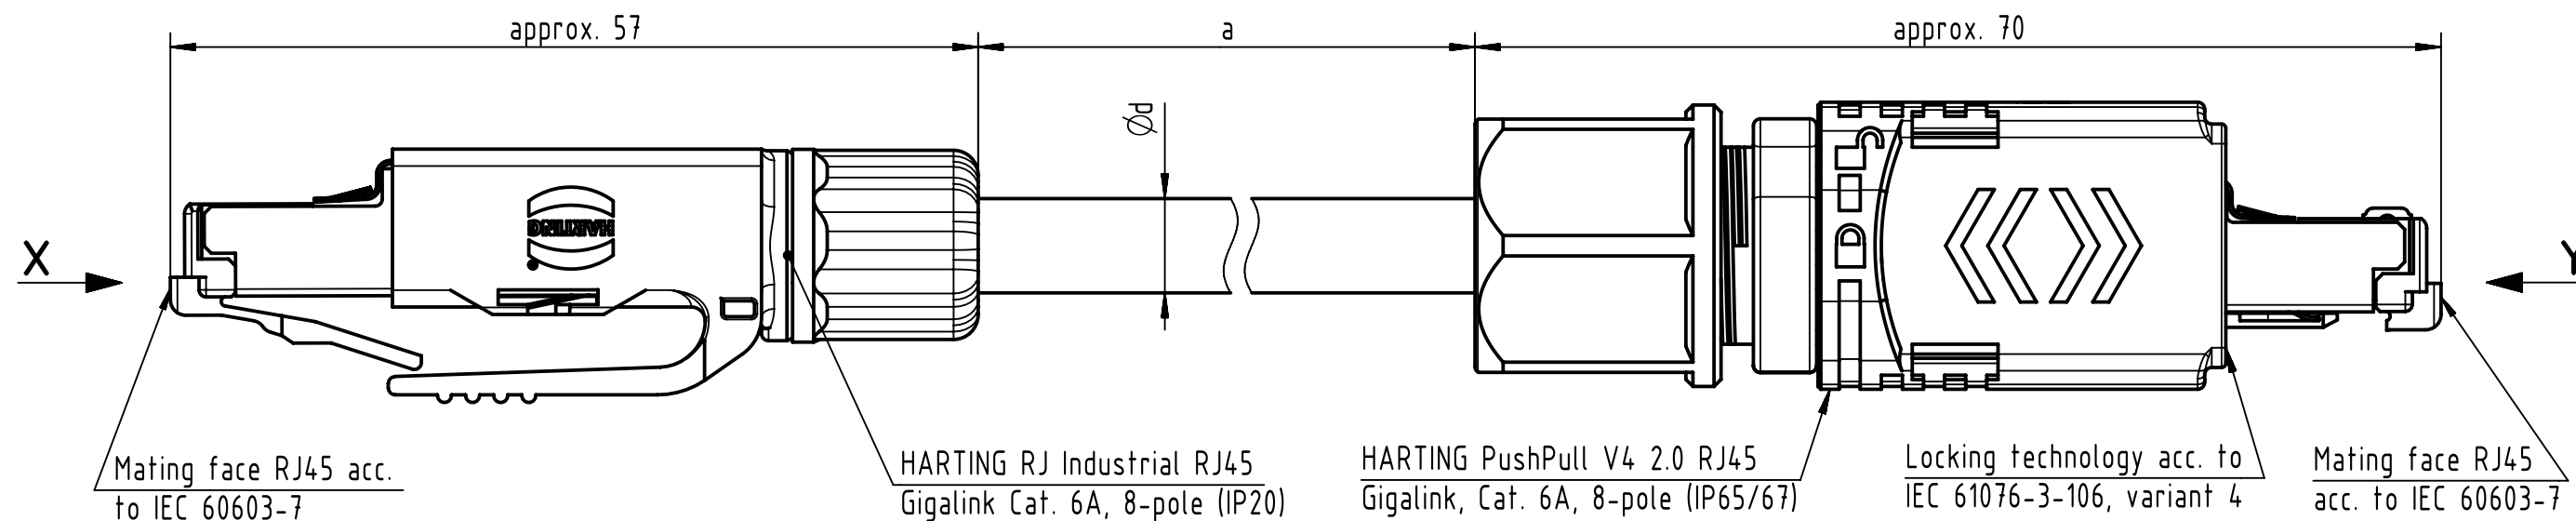
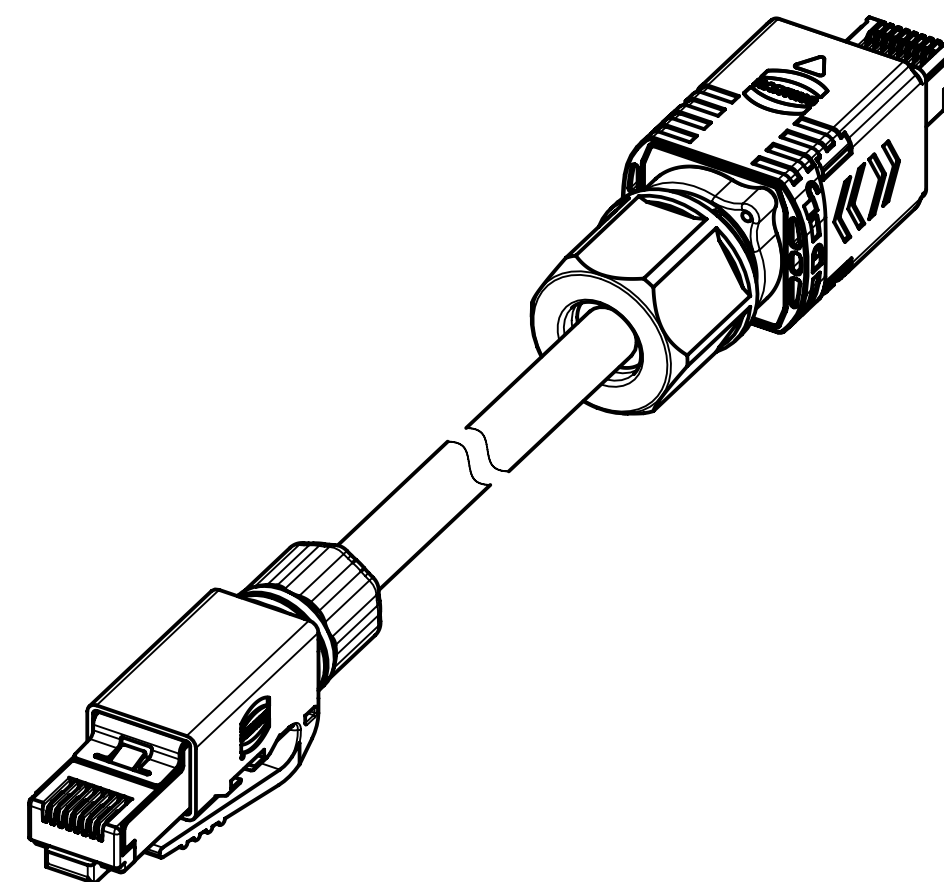


Connector Location A

Connector Location B

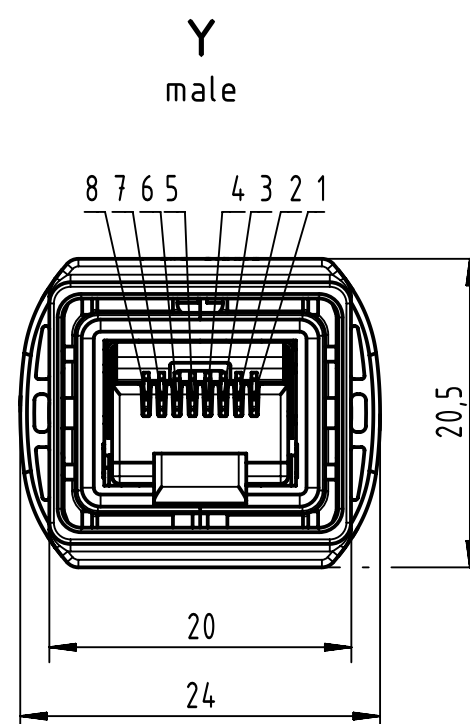

Loading Plan acc. to TIA/EIA 568B

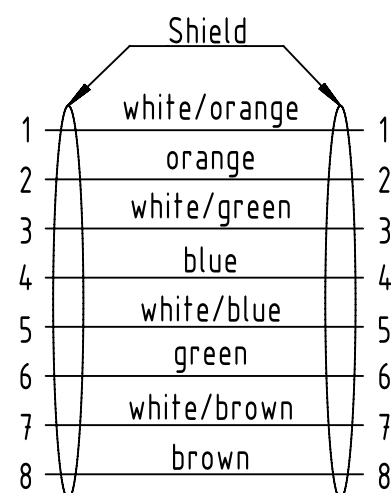

Temperature range:

- Fixed installation: -20°C ... +80°C
- Dynamic installation: -20°C ... +80°C

		All Dimensions in mm		Tech. Character.		Free size tol.		According to production drawing	
		All rights reserved		Created by COSTEA Costea		Inspected by COSTEA Costea		Standardisation BANCUI Banciu	
		Department HCS - GPM		Title RJ Industrial Cable Assembly		Date 2025-09-01		State Final Release	
		HARTING Customised Solutions		Type TB		Number 09457011YYY		Doc-Key / ECM-Nr. 100121364/UGD/011/P 500000290275	
		D-32339 Espelkamp						Rev. P	
								Page 1/2	

1		2		3		4		5		6		7		8																																																					
A	36	09457011523		HARTING IE Cat.6A 4x2xAWG 26/7 PVC yellow		100*		6.6		NOTE: * Cat.6A 10 Gbit/s Ethernet transmission possible for lengths up to 45m																																																									
	35	09457011525				70*																																																													
	34	09457011522				50*																																																													
	33	09457011524				30																																																													
B	32	09457011521				25										NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																																																			
	31	09457011514				20																																																													
	30	09457011513				15																																																													
	29	09457011512				10																																																													
C	28	09457011519				9																NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																																													
	27	09457011518				8																																																													
	26	09457011517				7																																																													
	25	09457011520				6																																																													
D	24	09457011511				5																						NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																																							
	23	09457011516				4																																																													
	22	09457011510				3																																																													
	21	09457011526				2.5																																																													
E	20	09457011515				2																												NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																																	
	19	09457011509				1.5																																																													
	18	09457011508				1																																																													
	17	09457011507				0.5																																																													
F	16	09457011118		50		NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																																																													
	15	09457011117		35																																																															
	14	09457011116		20																																																															
	13	09457011115		15																																																															
G	12	09457011114		10								NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																																																							
	11	09457011113		9																																																															
	10	09457011112		8																																																															
	9	09457011111		7																																																															
H	8	09457011110		6														NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																																																	
	7	09457011109		5																																																															
	6	09457011108		4																																																															
	5	09457011107		3																																																															
I	4	09457011106		2																				NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																																											
	3	09457011105		1.5																																																															
	2	09457011104		1																																																															
	1	09457011103		0.5																																																															
J	Cont. no.	Part no.		Type of cable																										Dim. a[m]		Dim. d[mm]		NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																																	
																																NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																																			
								NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																																																											
																														NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																																					
														NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																																																					
																																								NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																											
																				NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																																															
																																														NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																					
																										NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																																									
																																																				NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory															
																																						NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																													
																																				NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																															
								NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																																																											
																																NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																																			
														NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																																																					
																																												NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																							
																				NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																																															
																																																		NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																	
																										NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																																									
																																																								NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory											
																																										NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																									
																																						NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																													
								NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																																																											
																																NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																																			
														NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																																																					
																																																NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																			
																				NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																																															
																																																						NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory													
																										NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																																									
																																																												NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory							
																																												NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																							
																																						NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																													
								NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																																																											
																																NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																																			
														NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																																																					
																																																		NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																	
																				NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																																															
																																																								NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory											
																										NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																																									
																																																														NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory					
																																												NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																							
																																						NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																													
								NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																																																											
																																NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																																			
														NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																																																					
																																																		NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																	
																				NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																																															
																																																								NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory											
																										NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																																									
																																																														NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory					
																																												NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																							
																																						NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																													
								NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																																																											
																																NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																																			
														NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																																																					
																																																		NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																	
																				NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																																															
																																																								NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory											
																										NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																																									
																																																														NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory					
																																												NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																							
																																						NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																													
								NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																																																											
																																NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m: -relative positioning of the connectors to each other not obligatory																																			
														NOTE: * For lengths < 1.0m: - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30° * For lengths ≥ 1.0m:<																																																					



All rights reserved
Department HCS - GPM

Created by
COSTEA
Costea

Inspected by
COSTEA
Costea

Standardisation
BANCIUD
Banciu

Date
2025-09-01

State
Final Release

Title
RJ Industrial Cable Assembly


Type
TB

Number
09457011YYYY

Doc-Key / ECM-Nr.
100121364/UGD/011/P
500000290275

Rev.
P

Page
2/2



All Dimensions
in mm

Tech. Character.

Free size tol.

According to production drawing

HARTING Customised Solutions
D-32339 Espelkamp

Type
TB

Number
09457011YYYY

Doc-Key / ECM-Nr.
100121364/UGD/011/P
500000290275

Rev.
P

Page
2/2