

Connector Location A

Connector Location B

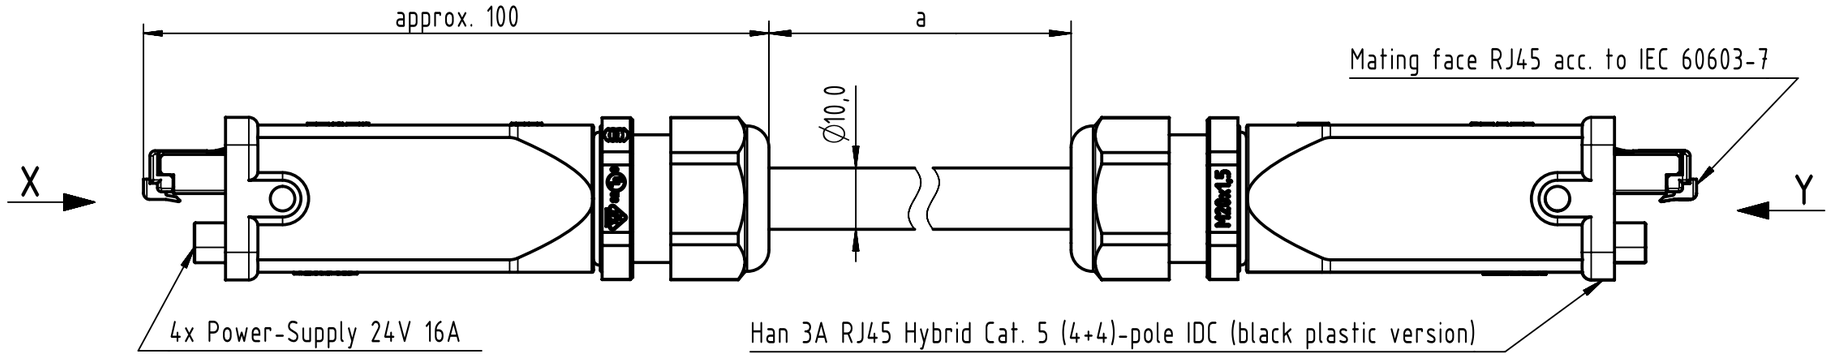


Cont. no	Part no.	Type of cable	Dim. a [m]
25	09457251361	PROFINET Type B Hybrid 4xAWG 22/7 + 4x1.5sqmm (shielded), FRNC, Cat. 5, green	100 ±1
24	09457251360		90 ±0.9
23	09457251359		80 ±0.8
22	09457251358		70 ±0.7
21	09457251357		60 ±0.6
20	09457251356		50 ±0.5
19	09457251355		40 ±0.4
18	09457251354		30 ±0.3
17	09457251332		25 ±0.25
16	09457251353		20 ±0.2
15	09457251352		15 ±0.15
14	09457251333		12 ±0.12
13	09457251351		10 ±0.1
12	09457251331		9 ±0.09
11	09457251330		8 ±0.08
10	09457251329		7 ±0.07
9	09457251328		6 ±0.06
8	09457251327		5 ±0.05
7	09457251326		4 ±0.04
6	09457251325		3 ±0.03
5	09457251324		2 ±0.02
4	09457251323		1.5 ±0.015
3	09457251322		1 ±0.01
2	09457251362		0.8 ±0.01
1	09457251321		0.5 ±0.01


X
male

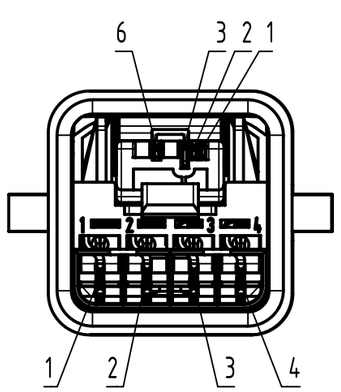


Loading Plan

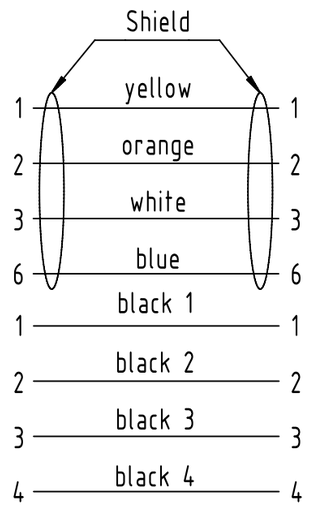

Y
male

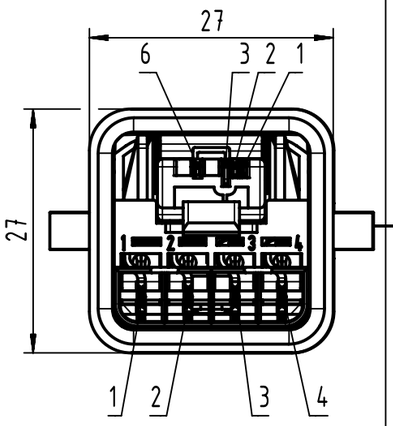

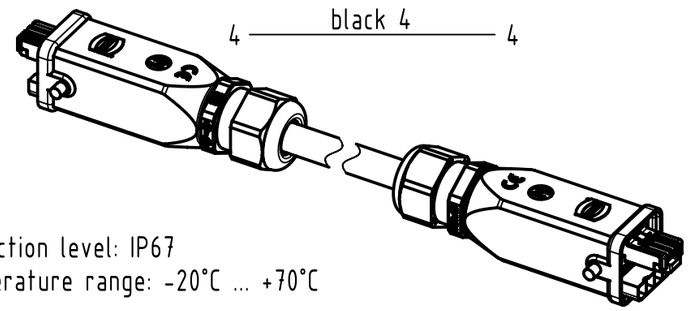

- Protection level: IP67
- Temperature range: -20°C ... +70°C

All Dimensions in mm	Tech. Character.	Free size tol.	According to production drawing	
All rights reserved	Created by COSTEA Costea	Inspected by 407576 Stoica	Standardisation BANCIUD Banciu	Date 2025-11-10	State Final Release
Department HCS - GPM	Title Han 3A RJ45 Hybrid Cable Assembly			Doc-Key / ECM-Nr. 100155668/UGD/008/E 500000293850	
HARTING Customised Solutions D-32339 Espelkamp	Type TB	Number 094572513XX		Rev. E	Page 1/1

A3