
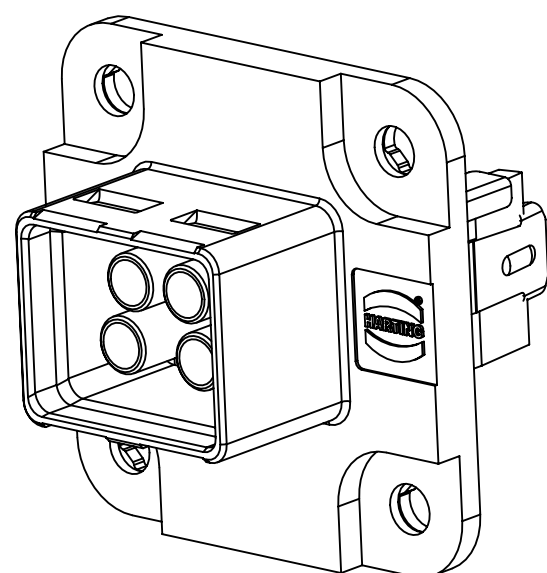
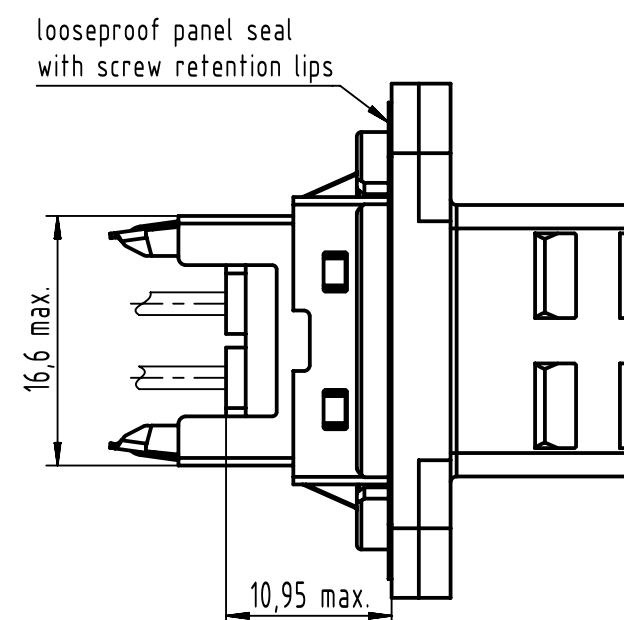
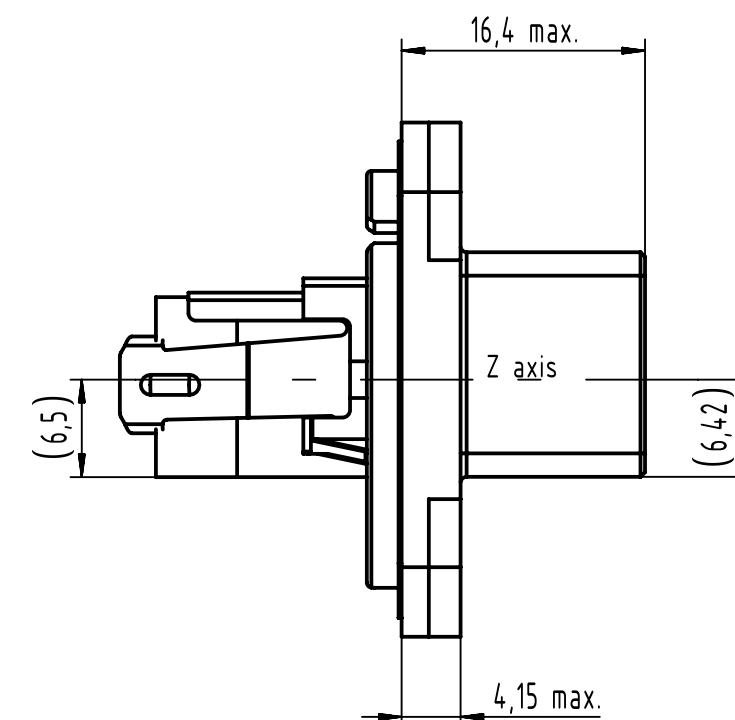
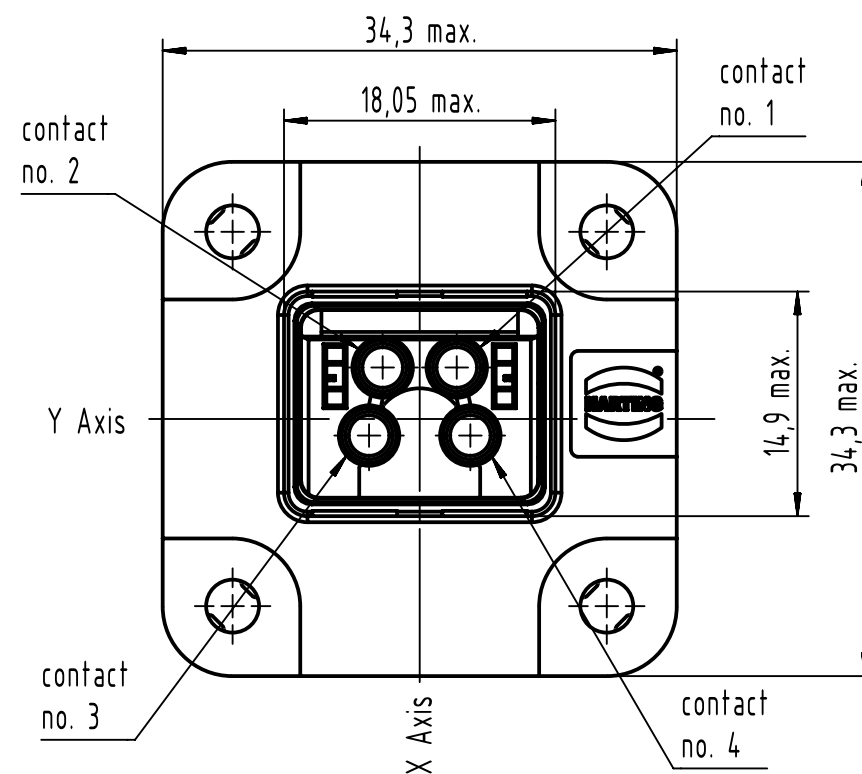


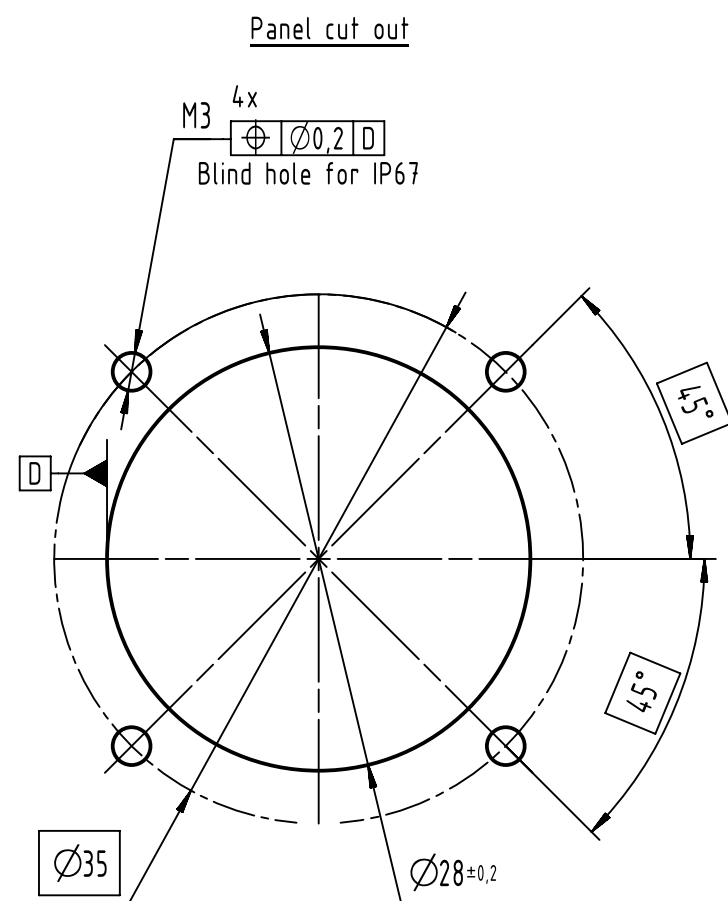

x4 stranded wires 1,5mm²

Connector pitches on panel = 35 mm

Receptacle mating face acc. to IEC 61076-3-106 - variant 04

Screwing with x4 M3 screws with flat washer recommended screwing torque for IP67: 0,5 Nm min.

		All Dimensions in mm Original Size DIN A3		Scale 2:1		Free size tol.		Ref.							
								Sub. 0946295443/B/17.06.2014							
		All rights reserved		Created by ellermann		Inspected by serbana		Standardisation		Date 11-Mar-2026		State 40 - Released			
		Department EL PD		Title HARTING PushPull Metal Power EasyInstall								Doc-Key / ECM-Nr. DS00191182			
HARTING D-32339 Espelkamp				Type TB		Design Number DS00191182		SAP Mat. Number 09462954430				Rev. C		Page 1/1	