


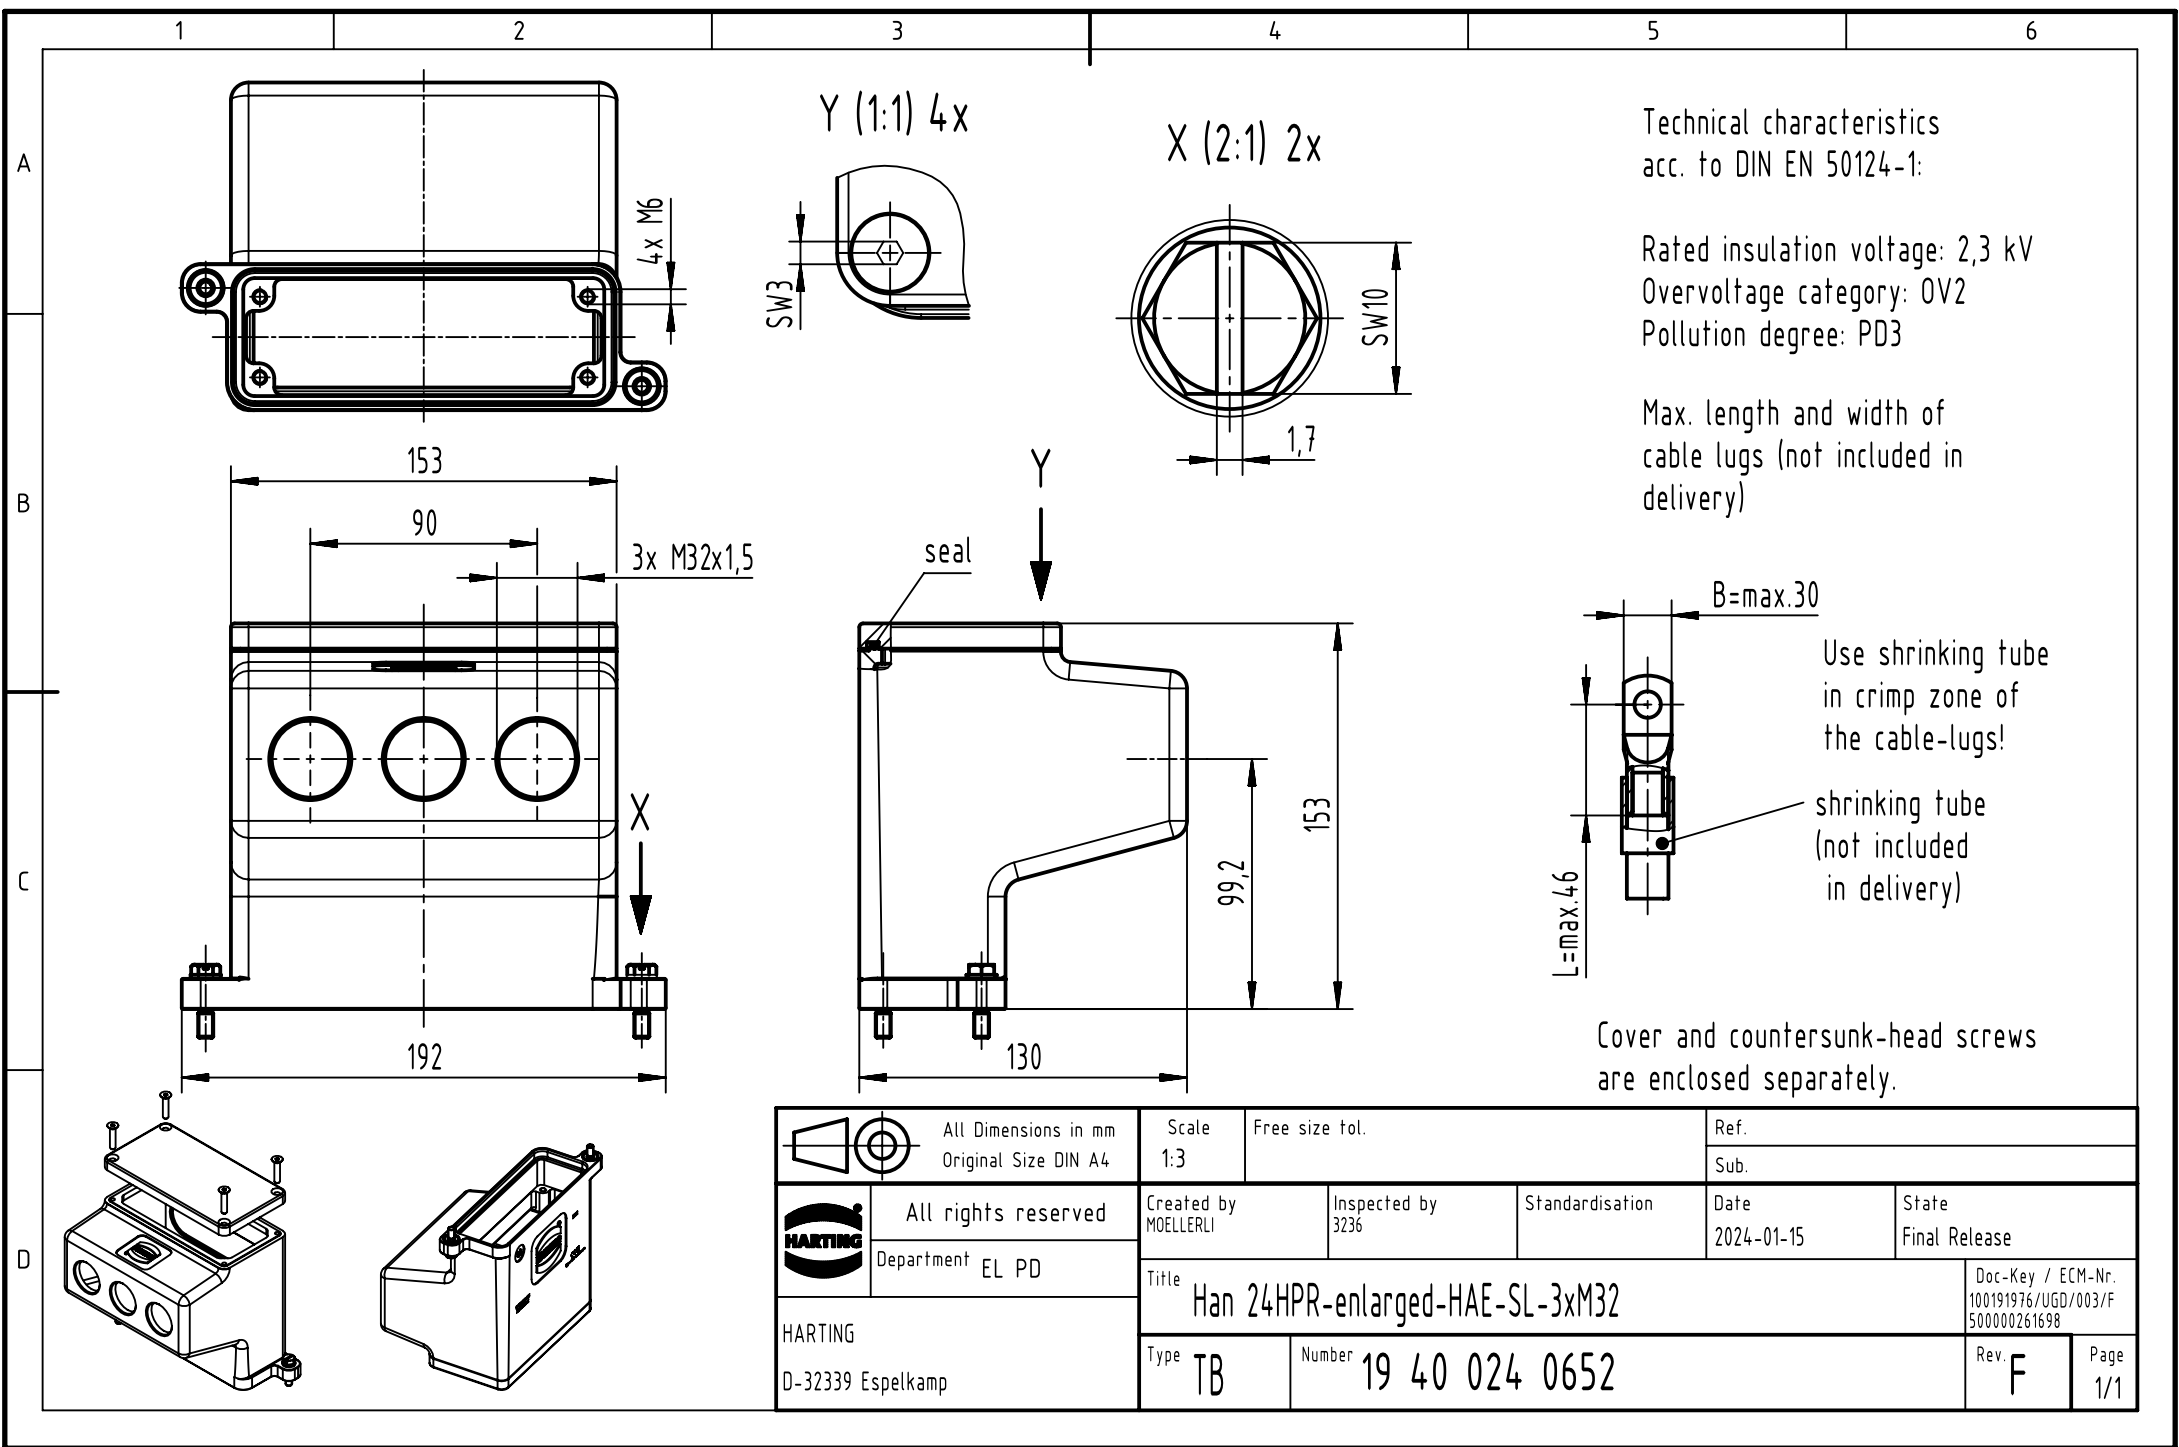

Technical characteristics
acc. to DIN EN 50124-1:

Rated insulation voltage: 2,3 kV
Overvoltage category: OV2
Pollution degree: PD3

Max. length and width of
cable lugs (not included in
delivery)

B=max.30
Use shrinking tube
in crimp zone of
the cable-lugs!
shrinking tube
(not included
in delivery)
L=max.46

Cover and countersunk-head screws
are enclosed separately.

 		All Dimensions in mm Original Size DIN A4		Scale 1:3	Free size tol.		Ref.								
							Sub.								
	All rights reserved			Created by MOELLERLI		Inspected by 3236		Standardisation		Date 2024-01-15		State Final Release			
	Department EL PD														
HARTING D-32339 Espelkamp				Title Han 24HPR-enlarged-HAE-SL-3xM32								Doc-Key / ECM-Nr. 100191976/UGD/003/F 500000261698			
				Type TB		Number 19 40 024 0652						Rev. F		Page 1/1	