


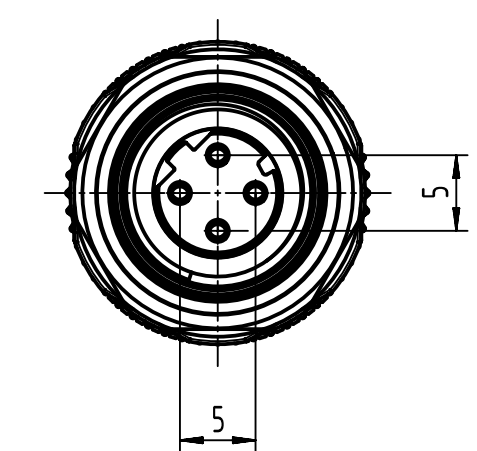
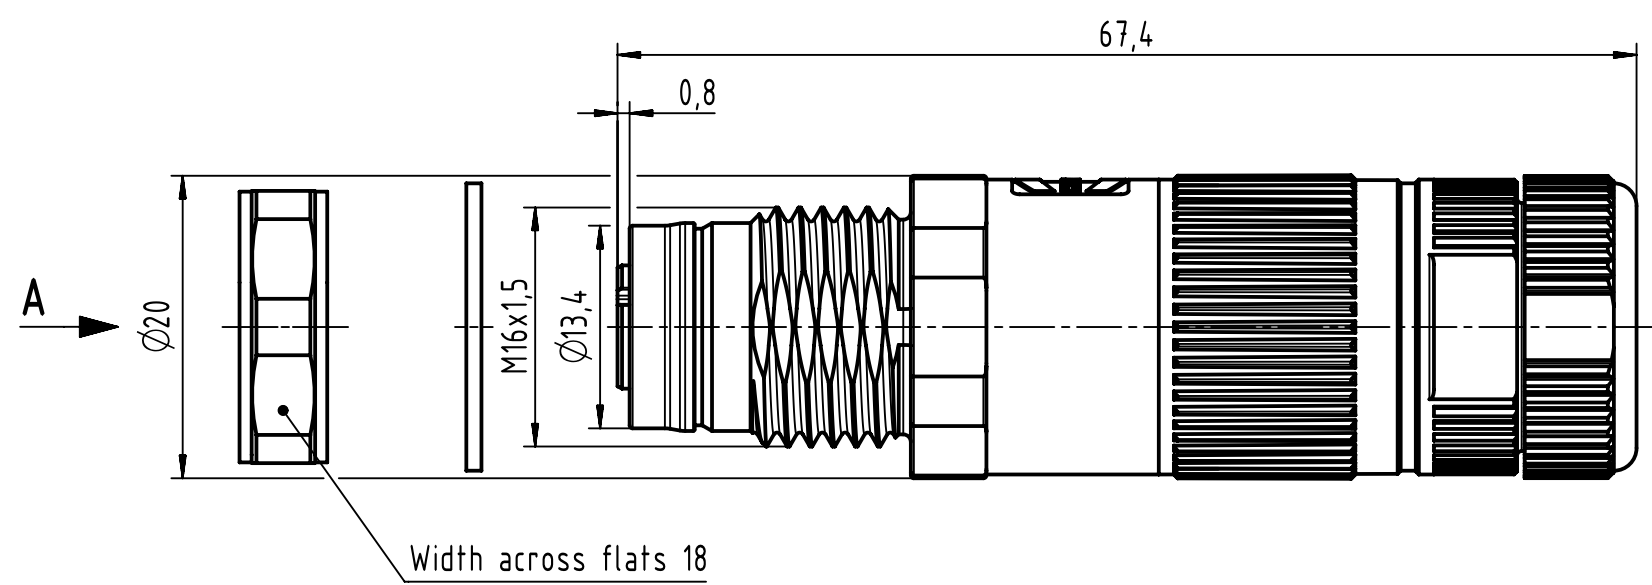


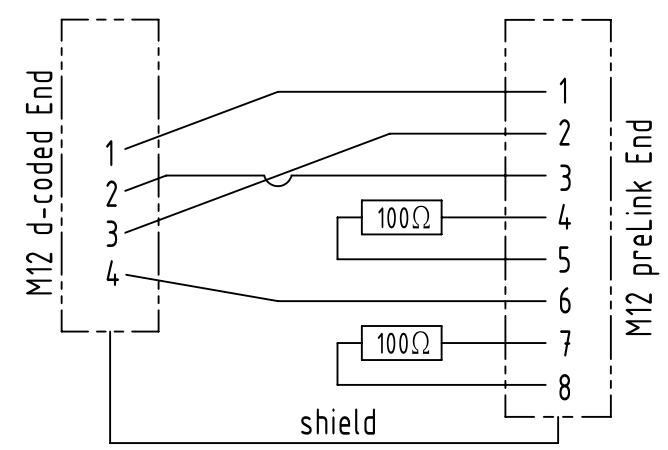


circuit diagram

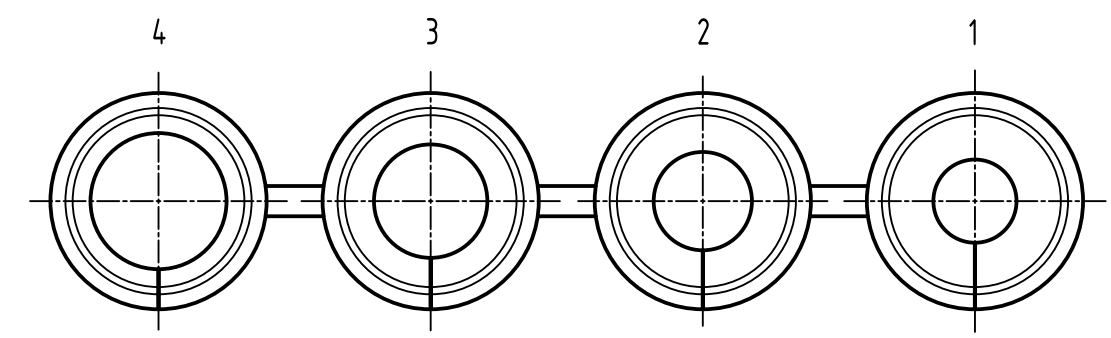

panel cut out
(1:1)

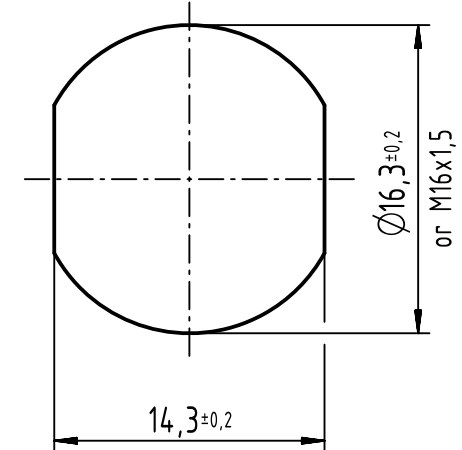

Sealing (1) - cable diameter 5.0-6.5 mm
 Sealing (2) - cable diameter 6.0-7.5 mm
 Sealing (3) - cable diameter 7.5-8.5 mm
 Sealing (4) - cable diameter 8.5-9.5 mm

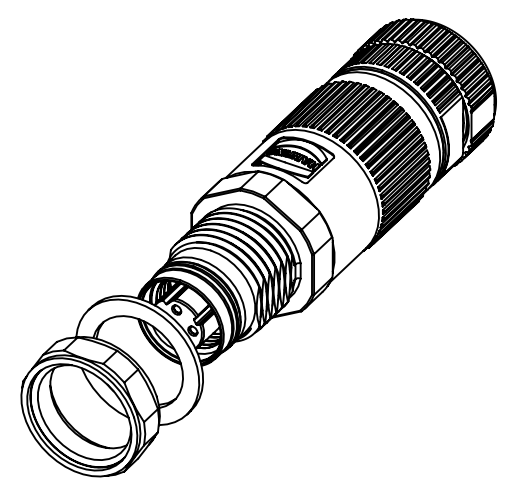

This set includes the shown M12 enclosure parts and the M12 insert.
 Usable preLink termination blocks are:
 - 20 82 000 0001 (8-pole AWG 22/23, yellow)
 - 20 82 000 0003 (8-pole AWG 26/27, transparent)
 - 20 82 000 0005 (XL) (4-pole AWG 22/23, black)
 Depending of the used data cable the copper foil p/n 0945 800 0200 can be useful.

		All Dimensions in mm Original Size DIN A3		Scale 2:1		Free size tol.		Ref.		
								Sub.		
		All rights reserved		Created by BALSAN		Inspected by PRIESTER		Standardisation HOFFMANN		
		Department EL PD						Date 2019-05-14		
HARTING Electronics GmbH D-32339 Espelkamp				Title preLink M12 cable jack D-cod. 4-pole					Doc-Key / ECM-Nr. 100726722/UGD/000/D 500000151156	
				Type TB		Number 20820052001			Rev. D	Page 1/1