Connector Location A

Connector Location B

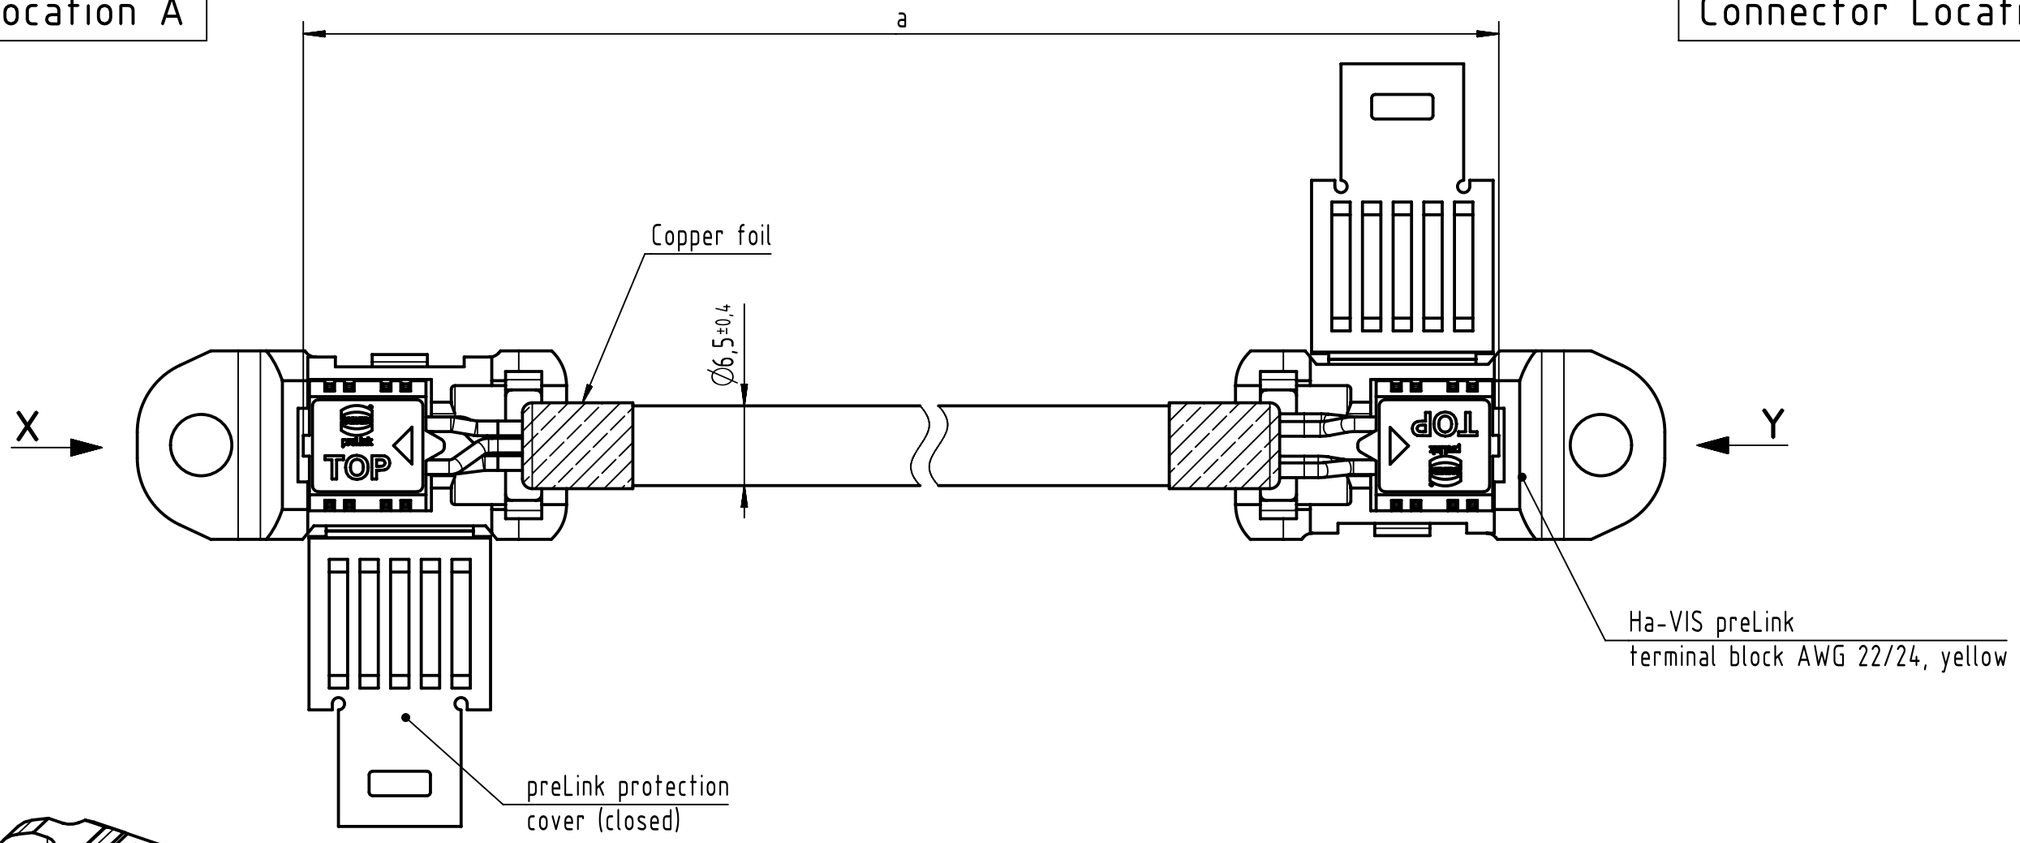

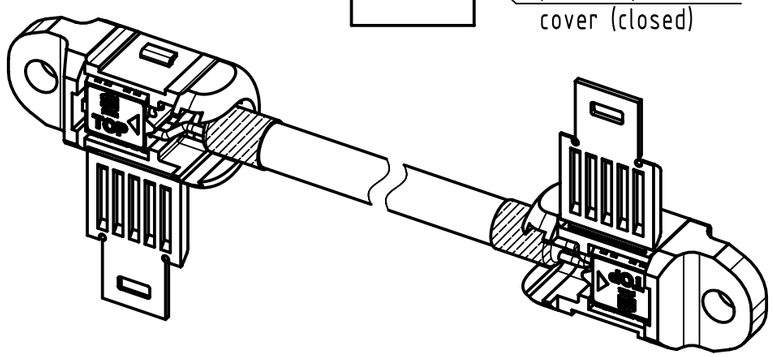

X
(without preLink protection cover)



Loading Plan



Y
(without preLink protection cover)



- Protection level: IP20
- **Temperature range:**
  - Fixed installation: -40°C ... +70°C
  - Dynamic installation: -20°C ... +60°C

Cont. no.	Part no.	Type of cable	Dim. a[m]
10	20826302100	HAR PROFINET Typ C 4xAWG 22/7 PUR Trail. green	10 ±0.1
9	20826302050		5 +0.04
8	20826302040		4 +0.04
7	20826302030		3 +0.04
6	20826302020		2 +0.04
5	20826302010		1 +0.04
4	20826302008		0.8 +0.04
3	20826302006		0.6 +0.04
2	20826302004		0.4 +0.02
1	20826302002		0.2 +0.02

All Dimensions in mm | Tech. Character. | Free size tol. | According to production drawing

All rights reserved

Department HCS - RO

HARTING Customised Solutions
D-32339 Espelkamp

Created by	Inspected by	Standardisation	Date	State
MUNTEANV Muntean	402676 Gross	MUNTEANV Muntean	2023-06-16	Final Release

Title: preLink cable PN Cat.5 4p

Doc-Key / ECM-Nr.: 100621852/UGD/005/D 500000245597

Type: TB | Number: 20826302XXX | Rev.: D | Page: 1/1

A3