
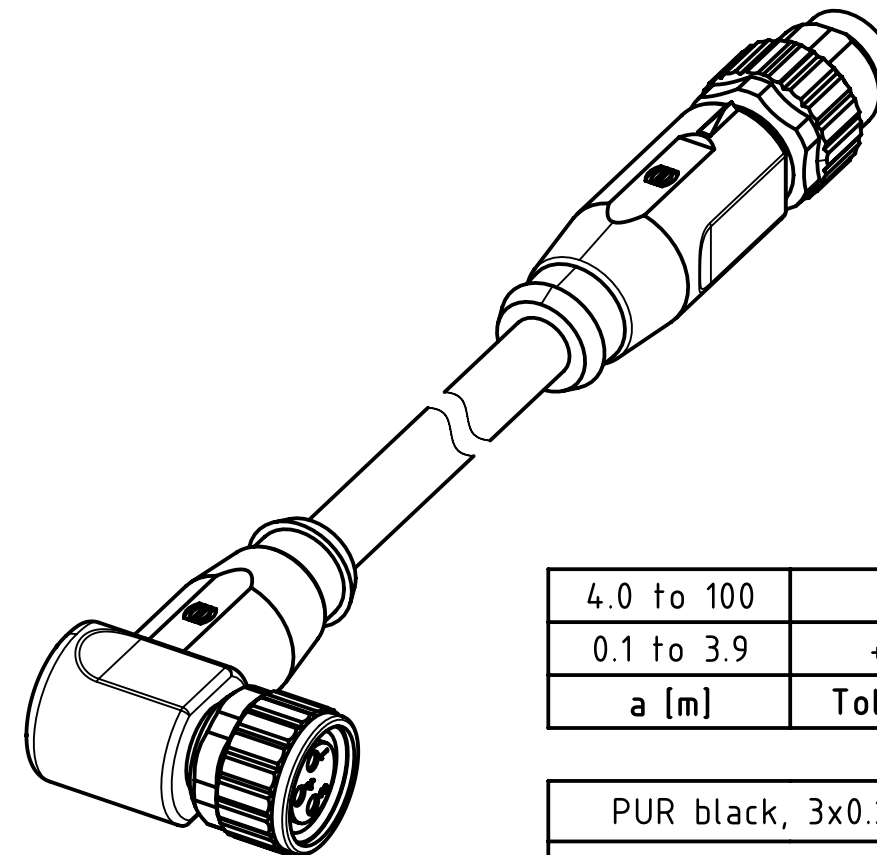


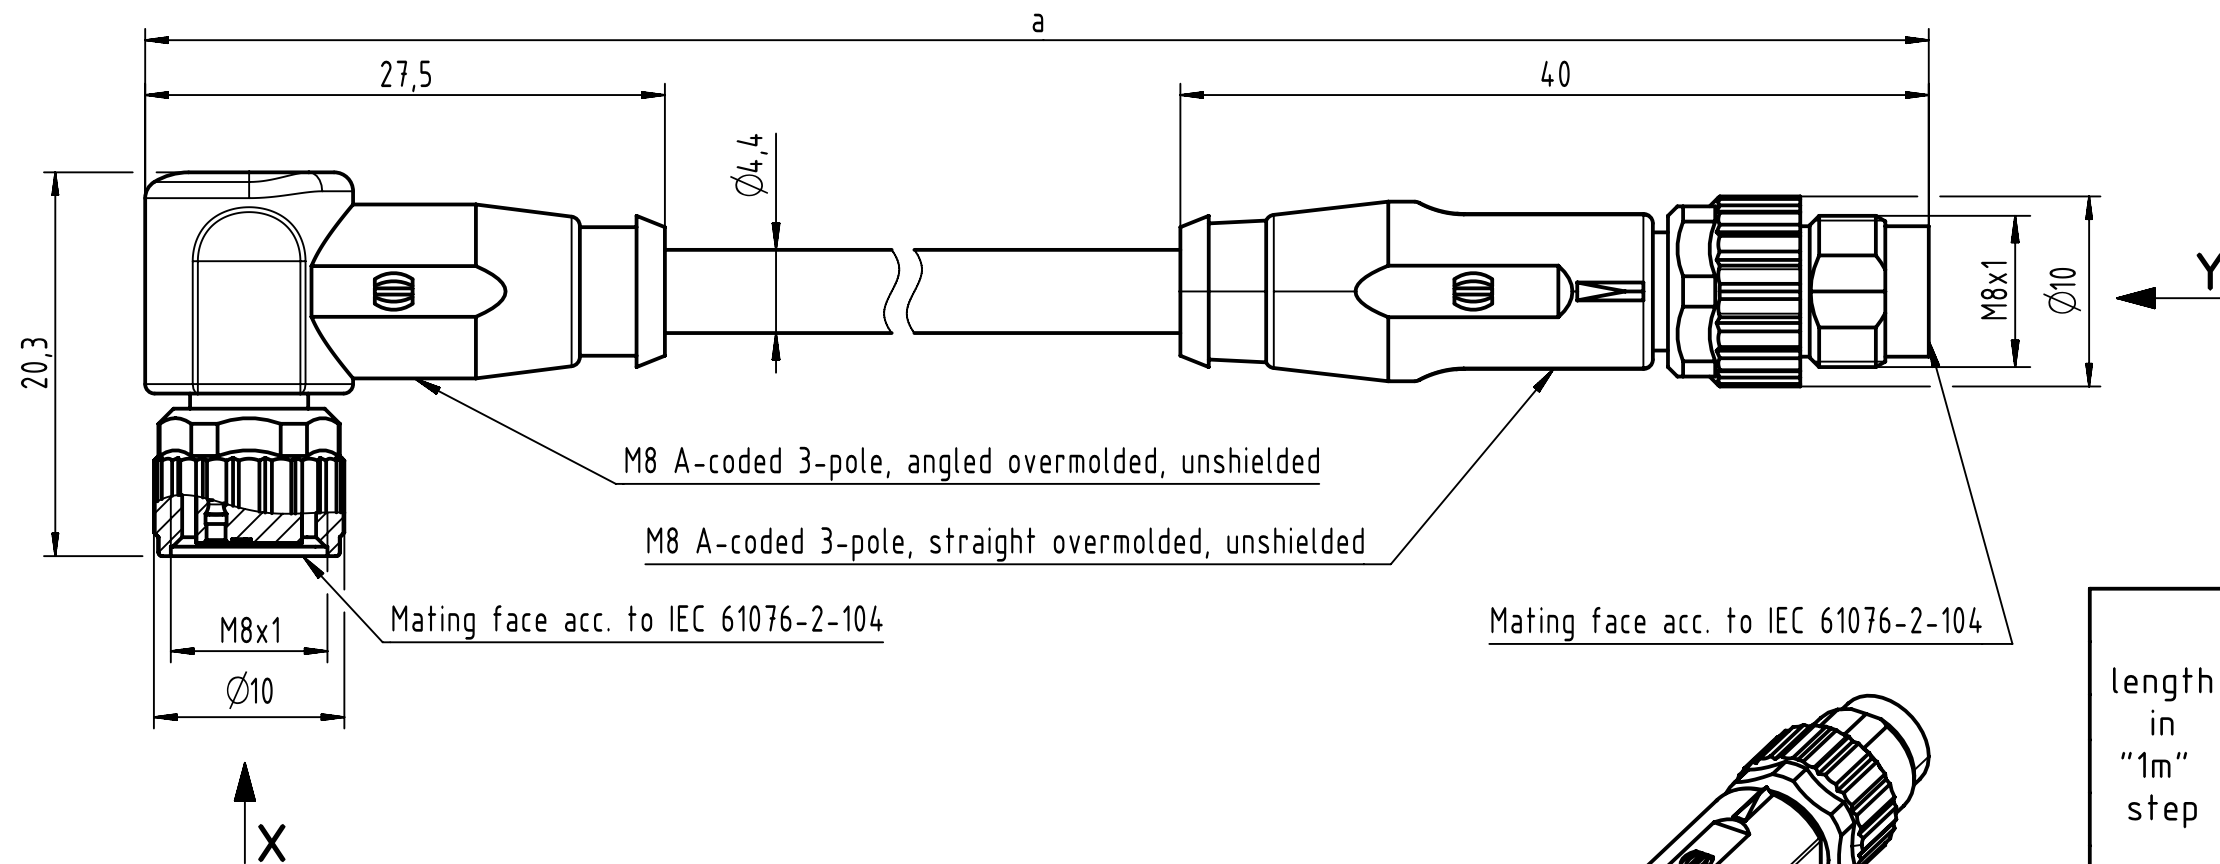

length in "1m" step	100	XXX=000
	99	XXX=990
	.	.
	.	.
	12	XXX=120
length in "0.1m" step	11	XXX=110
	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	.	.
	.	.
	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
0.1	XXX=001	
Step	a [m]	XXX

- Protection level: IP65/67
- Temperature range: -25°C ... +80°C

		All rights reserved		Created by BANIUD Banciu		Inspected by 402676 Gross		Standardisation MUNTEANV Muntean		Date 2023-01-27		State Final Release			
HARTING Customised Solutions		Department HCS - RO		Title M8 Cable Assembly 3-poles an/st f/m								Doc-Key / ECM-Nr. 100809594 / UGD/009/B 500000236025			
D-32339 Espelkamp		Type TB		Number 21348083388XXX								Rev. B		Page 1/1	