
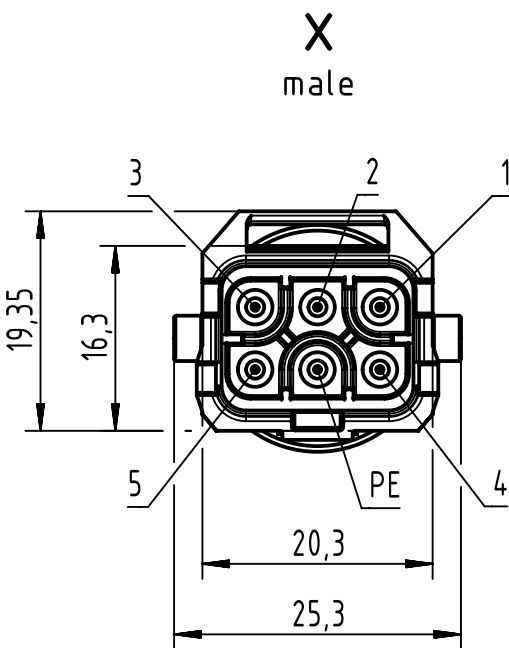


Connector Location A


Connector Location B

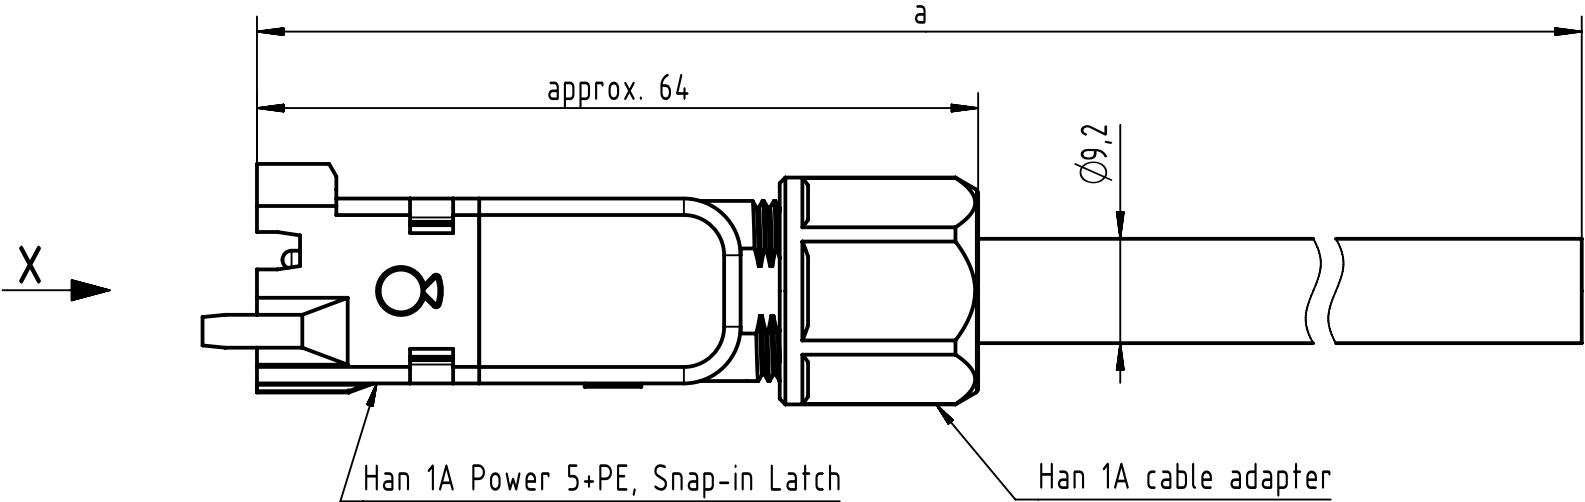

Loading Plan

1	wire 1
2	wire 2
3	wire 3
4	wire 4
5	wire 5
PE	green/yellow

NOTE:
* Silver plated contacts
- Protection level: IP65
- Temperature range: -30°C ... +80°C

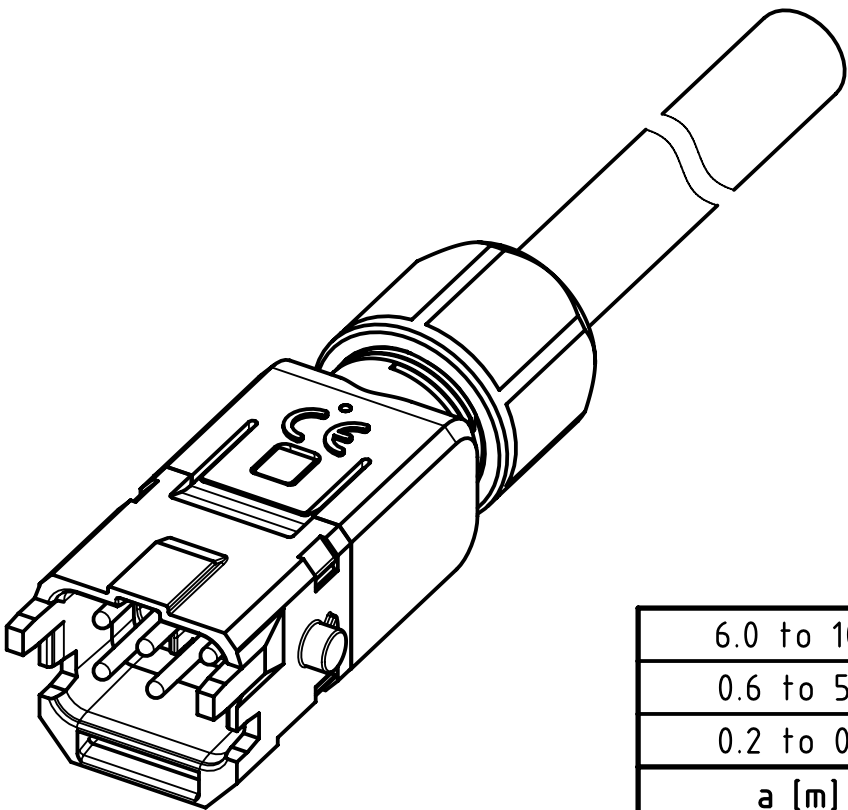

6.0 to 100	±1%
0.6 to 5.9	+0.04
0.2 to 0.5	+0.02
a [m]	Tolerance

length in "1m" step	100	XXX=000
	99	XXX=990
	.	.
	12	XXX=120
length in "0.1m" step	11	XXX=110
	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	.	.
	0.5	XXX=005
	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
Step	a [m]	XXX

JZ-500 6G1.5mm², PVC, grey	33501200203XXX
Type of cable	Part no.

		All Dimensions in mm		Tech. Character.		Free size tol.		According to production drawing		
	All rights reserved			Created by 402676	Inspected by COSTEA	Standardisation MUNTEANV	Date 2020-12-16	State Final Release		
	Department HCS - RO			Gross	Costea	Muntean				
	Title Han1A CA 5+PE +latch m/- PVC							Doc-Key / ECM-Nr. 100838824/UGD/000/C 500000186260		
HARTING Customised Solutions				Type TB	Number 33501200203XXX				Rev. C	Page 1/1
D-32339 Espelkamp										