


Connector Location A


Connector Location B

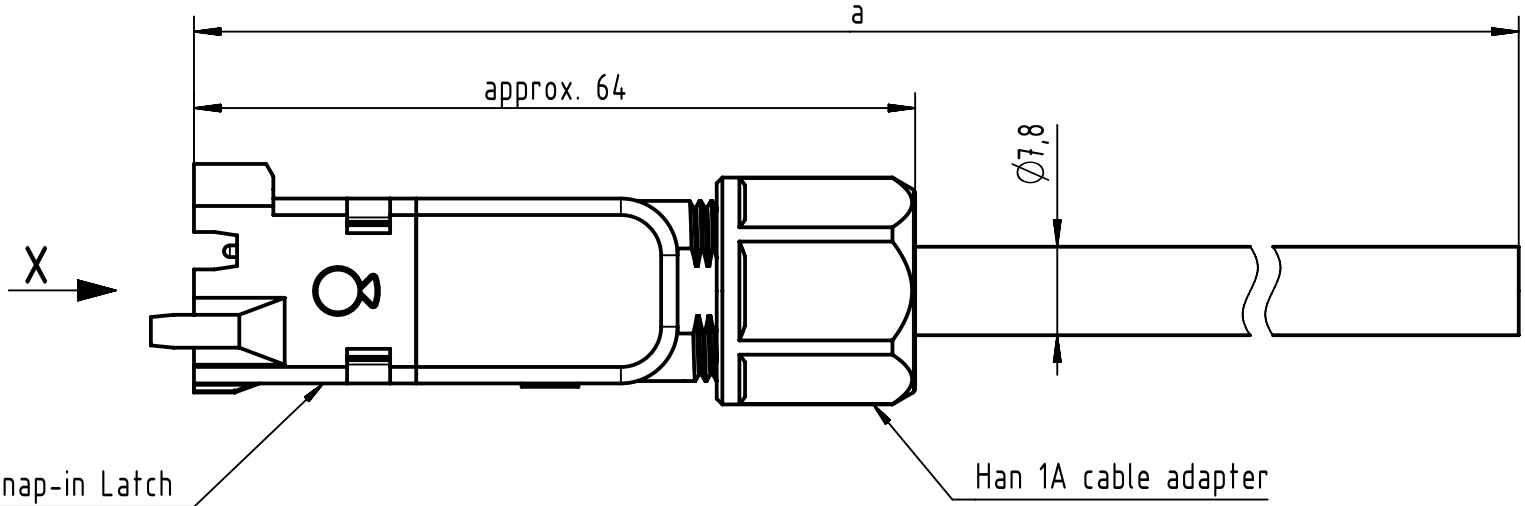

Han 1A Signal 12-pole, Snap-in Latch


Han 1A cable adapter

X
male

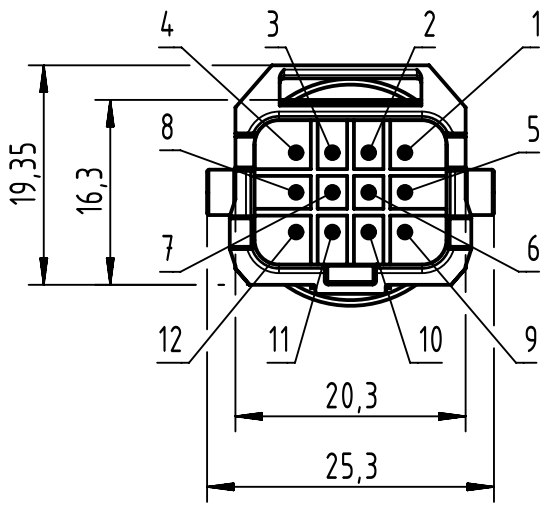

Loading Plan
acc. to DIN 47100

1	white
2	brown
3	green
4	yellow
5	grey
6	pink
7	blue
8	red
9	black
10	violet
11	grey-pink
12	red-blue

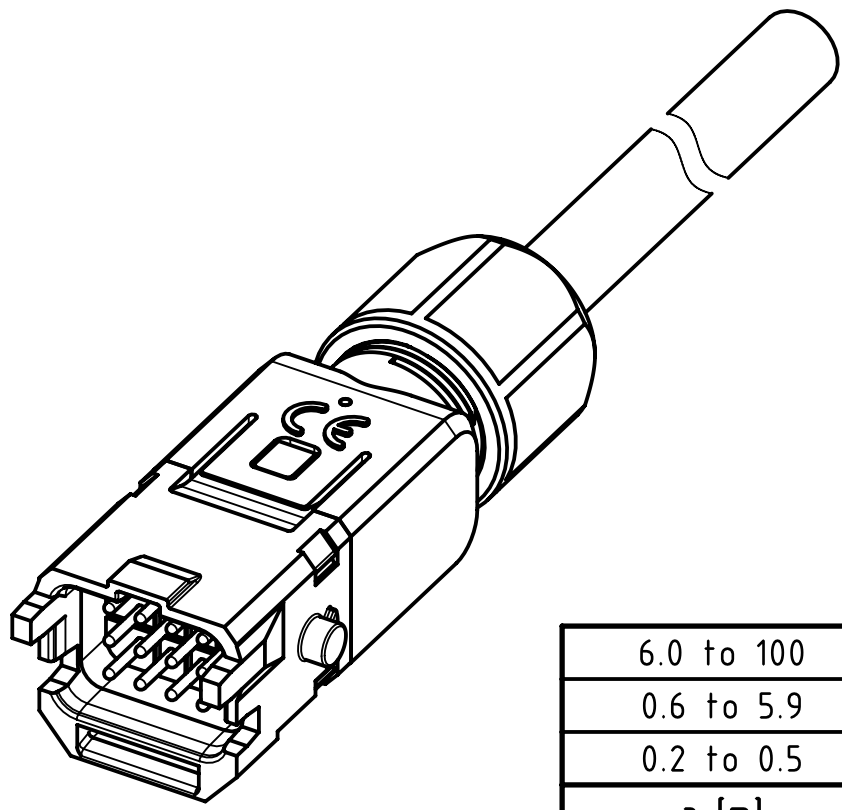

6.0 to 100	±1%
0.6 to 5.9	+0.04
0.2 to 0.5	+0.02
a [m]	Tolerance

length in "1m" step	100	XXX=000
	99	XXX=990
	.	.
	12	XXX=120
length in "0.1m" step	11	XXX=110
	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	.	.
	0.5	XXX=005
	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
Step	a [m]	XXX

NOTE:
* Gold plated contacts
- Protection level: IP65
- Temperature range: -30°C ... +80°C

TRONIC(LiYY) 12x0.34mm², PVC, grey	33501600304XXX
Type of cable	Part no.

All Dimensions in mm		Tech. Character.		Free size tol.		According to production drawing	
	All rights reserved	Created by 402676 Gross	Inspected by COSTEA Costea	Standardisation MUNTEANV Muntean	Date 2020-12-17	State Final Release	
	Department HCS - RO	Title Han1A CA 12 Pole +latch m/- PVC				Doc-Key / ECM-Nr. 100838848/UGD/000/B 500000186436	
	HARTING Customised Solutions D-32339 Espelkamp	Type TB	Number 33501600304XXX			Rev. B	Page 1/1