

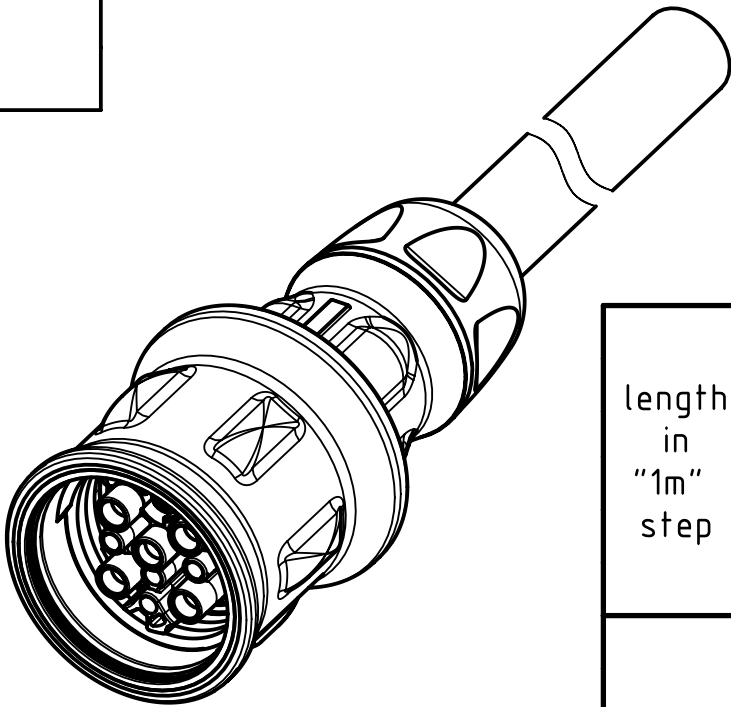


Connector Location A

Connector Location B

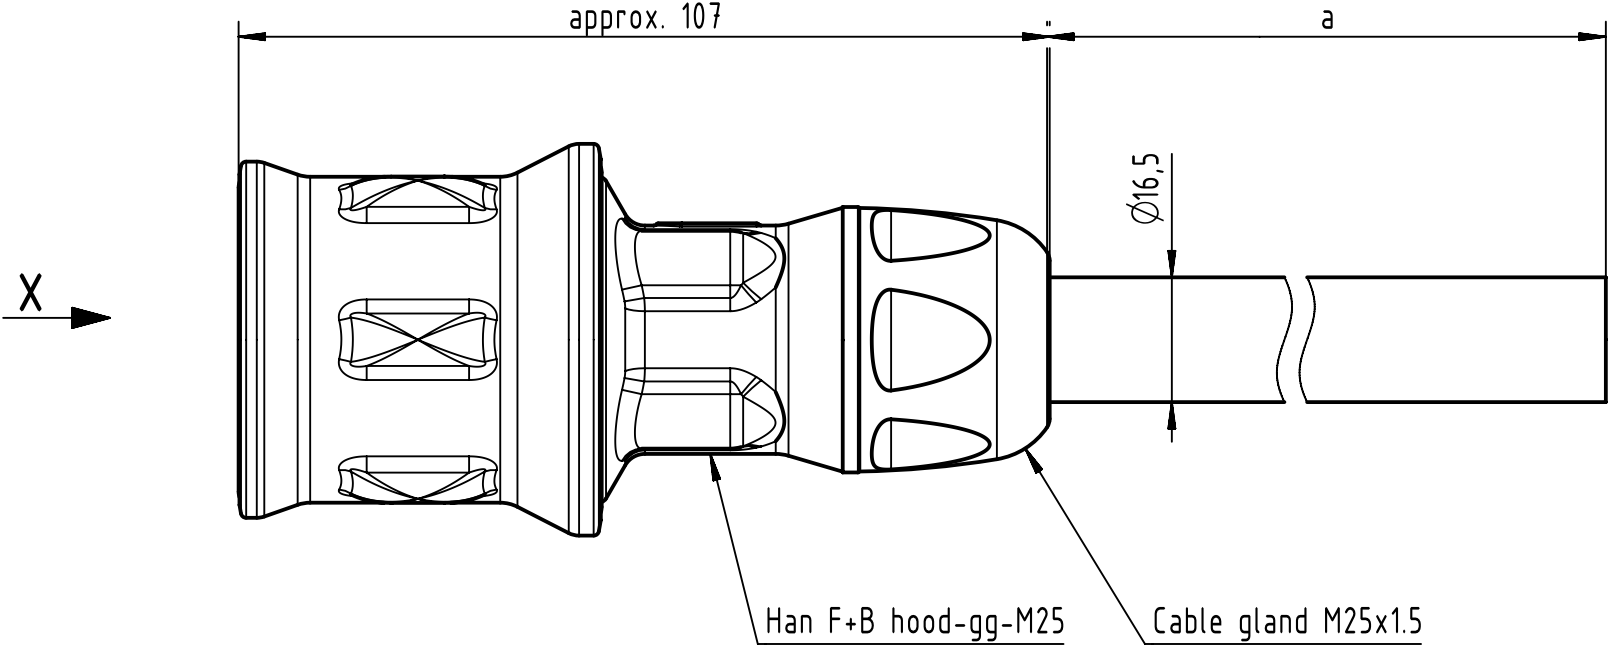

X
female

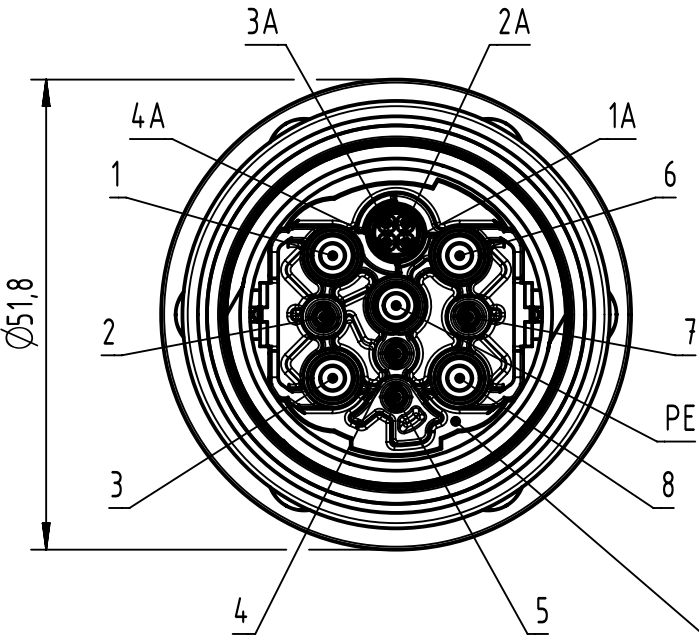

Pin Conn. Loc. A	Wire
1	Brown (2.5mm ²)
2	Brown (1.5mm ²)
3	Black (2.5mm ²)
4	White (0.75mm ²)
5	Red (0.75mm ²)
6	Grey (2.5mm ²)
7	Blue (1.5mm ²)
8	Blue (2.5mm ²)
PE	Green/yellow (2.5mm ²)
1A	Yellow (AWG22)
2A	White (AWG22)
3A	Orange (AWG22)
4A	Blue (AWG22)

Insert Han F+B Hybrid

6.0 to 100	±1%
0.6 to 5.9	+0.04
0.2 to 0.5	+0.02
a [m]	Tolerance

length in "1m" step	100	XXX=000
	99	XXX=990
	.	.
	12	XXX=120
length in "0.1m" step	11	XXX=110
	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	.	.
	0.5	XXX=005
	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
Step	a [m]	XXX

Servocbl. 5G2.5+(2x0.75)+(2x1.5)+(4xAWG22), black	33503000140XXX
Type of cable	Part no.

All rights reserved		Tech. Character.		Free size tol.		According to production drawing	
Department HCS - RO		Created by COSTEA Costea	Inspected by COSTEA Costea	Standardisation 402676 Gross	Date 2020-06-25	State Final Release	
HARTING Customised Solutions		Title F+B Hybridcbl. f/- st/-				Doc-Key / ECM-Nr. 100820101/UGD/000/B 500000175169	
D-32339 Espelkamp		Type TB	Number 33503000140XXX			Rev. B	Page 1/1