



Connector Location A

Connector Location B

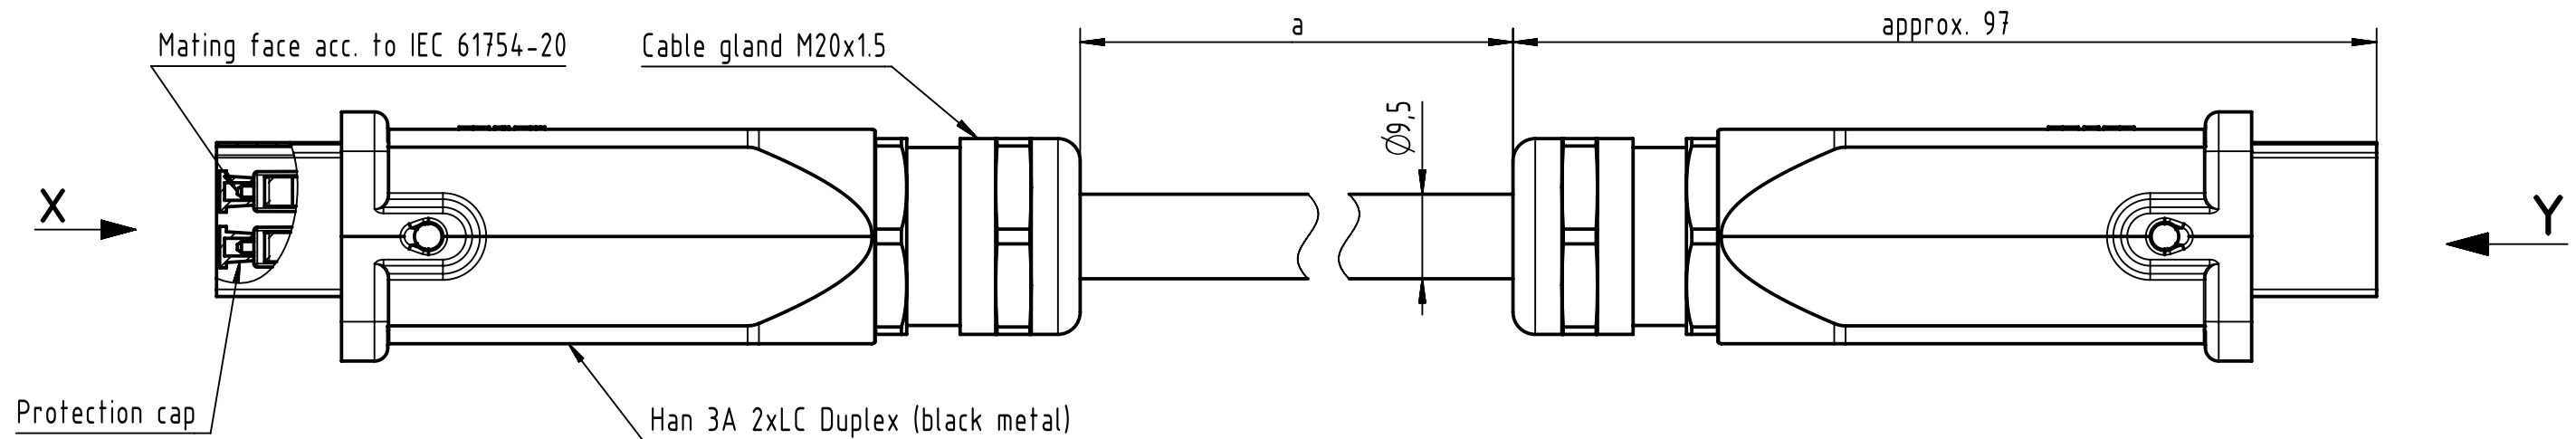



X
male
(without protection cap)

Y
male
(without protection cap)

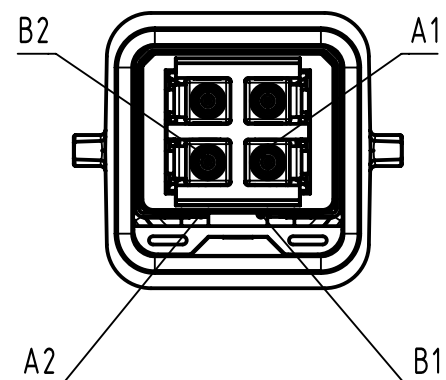

Loading Plan

A1 — yellow 1 — B2
B1 — yellow 2 — A2
A2 — yellow 3 — B1
B2 — yellow 4 — A1

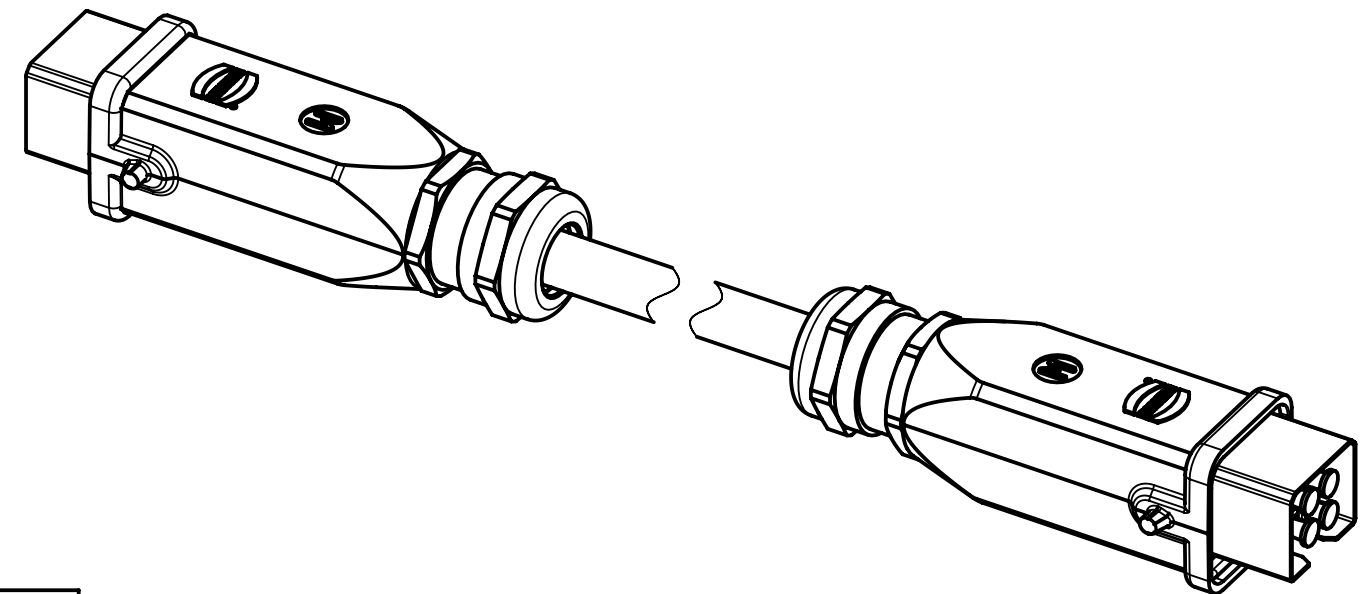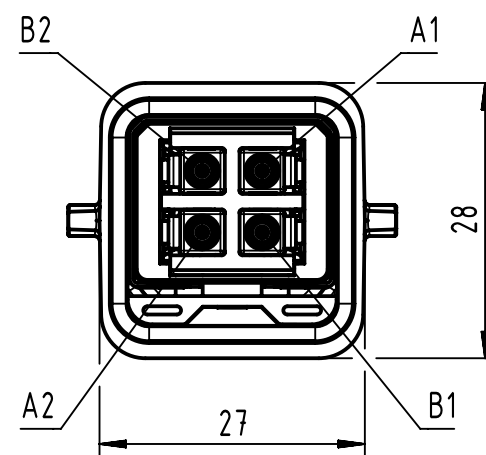

10	33542113000001	FO Cable, SM, 4-channel, E9/125, PVC, ø9.5, black	300	±1%
9	33542111000001		100	
8	33542110600001		60	
7	33542110500001		50	
6	33542110400001		40	
5	33542110300001		30	
4	33542110200001		20	
3	33542110100001		10	
2	33542110050001		5	
1	33542110010001		1	±0.03
Cont. no.	Part no.	Type of cable	Dim. a[m]	

- Protection level: IP65/67
- Temperature range: -25°C ... +70°C

 All Dimensions in mm		Tech. Character.		Free size tol.		According to production drawing						
	All rights reserved		Created by 407576		Inspected by COSTEA		Standardisation BANIUD		Date 2024-04-10		State	
	Department HCS - GPM		Stoica		Costea		Banciu				Final Release	
	HARTING Customised Solutions D-32339 Espelkamp		Title FO CA 3A/4xLC-3A/4xLC, 4x9/125 PVC									Doc-Key / ECM-Nr. 100178844/UGD/014/D 50000026702
Type TB			Number 3354211XXX0001							Rev. D		Page 1/1