





Connector Location A

Connector Location B

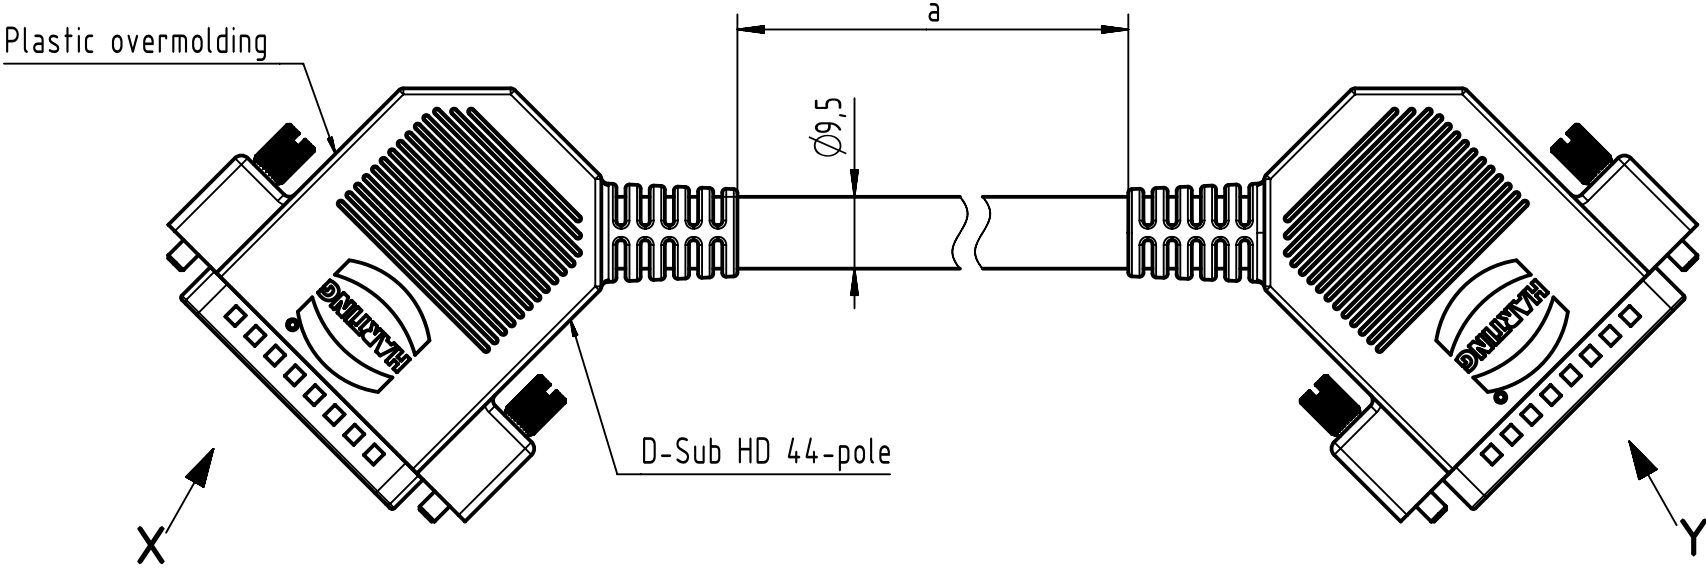

Loading plan for both connectors

Pair no.	Pin	Wire	Pair no.	Pin	Wire
1	1	white	13	24	black
	6	blue		31	green
2	2	white	14	25	black
	3	orange		26	brown
3	4	white	15	27	black
	5	green		42	grey
4	7	white	16	28	yellow
	8	brown		29	blue
5	9	white	17	32	yellow
	12	grey		33	orange
6	10	red	18	34	yellow
	11	blue		35	green
7	13	red	19	36	yellow
	14	orange		39	brown
8	15	red	20	37	yellow
	30	green		38	grey
9	16	red	21	40	violet
	21	brown		41	blue
10	17	red	22	43	violet
	18	grey		44	orange
11	19	black	23		not connected (violet/green)
	20	blue			
12	22	black	24		not connected (violet/brown)
	23	orange			
			Cu-foil		shield

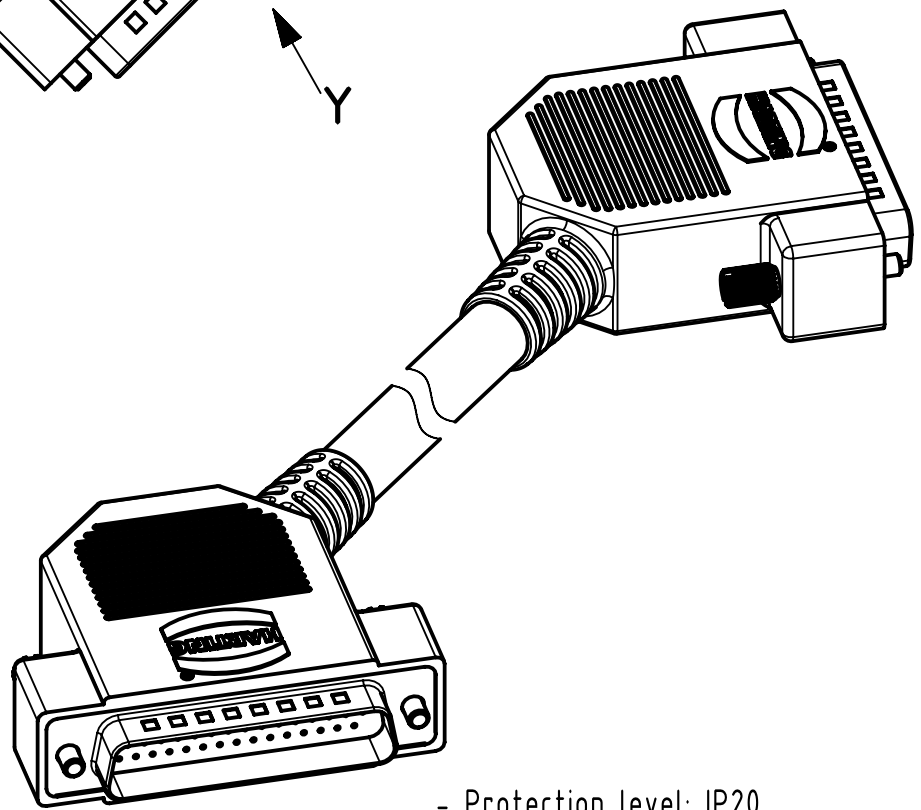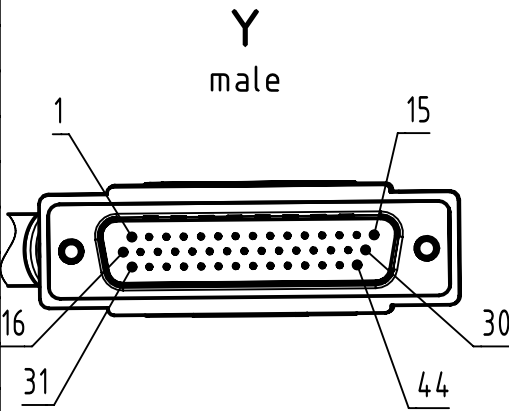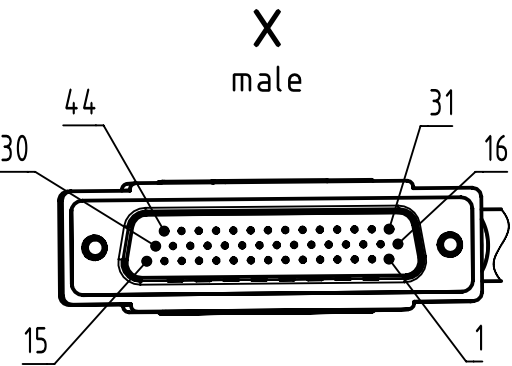

- Protection level: IP20
- Temperature range: -30°C ... +70°C

4	33562210050001	24PX26AWG DOUBLE SHIELDED LSZH grey	5 ±0.1
3	33562210020001		2 ±0.04
2	33562210010001		1 ±0.02
1	33562245000001		0.5 ±0.01
Cont. no.	Part no.	Type of cable	Dim. a[m]
		Tech. Character.	Free size tol.
		Created by BANCUID Banci	Inspected by COSTEA Costea
All rights reserved		Standardisation BANCUID Banci	Date 2025-03-05
Department HCS - GPM		State Final Release	
Title Cord 2xD-Sub male HD 44 pole overm.		Doc-Key / ECM-Nr. 100171248/UGD/009/A 500000271377	
Type TB		Number 335622XXXX0001	
HARTING Customised Solutions		Rev. A	
D-32339 Espelkamp		Page 1/1	