


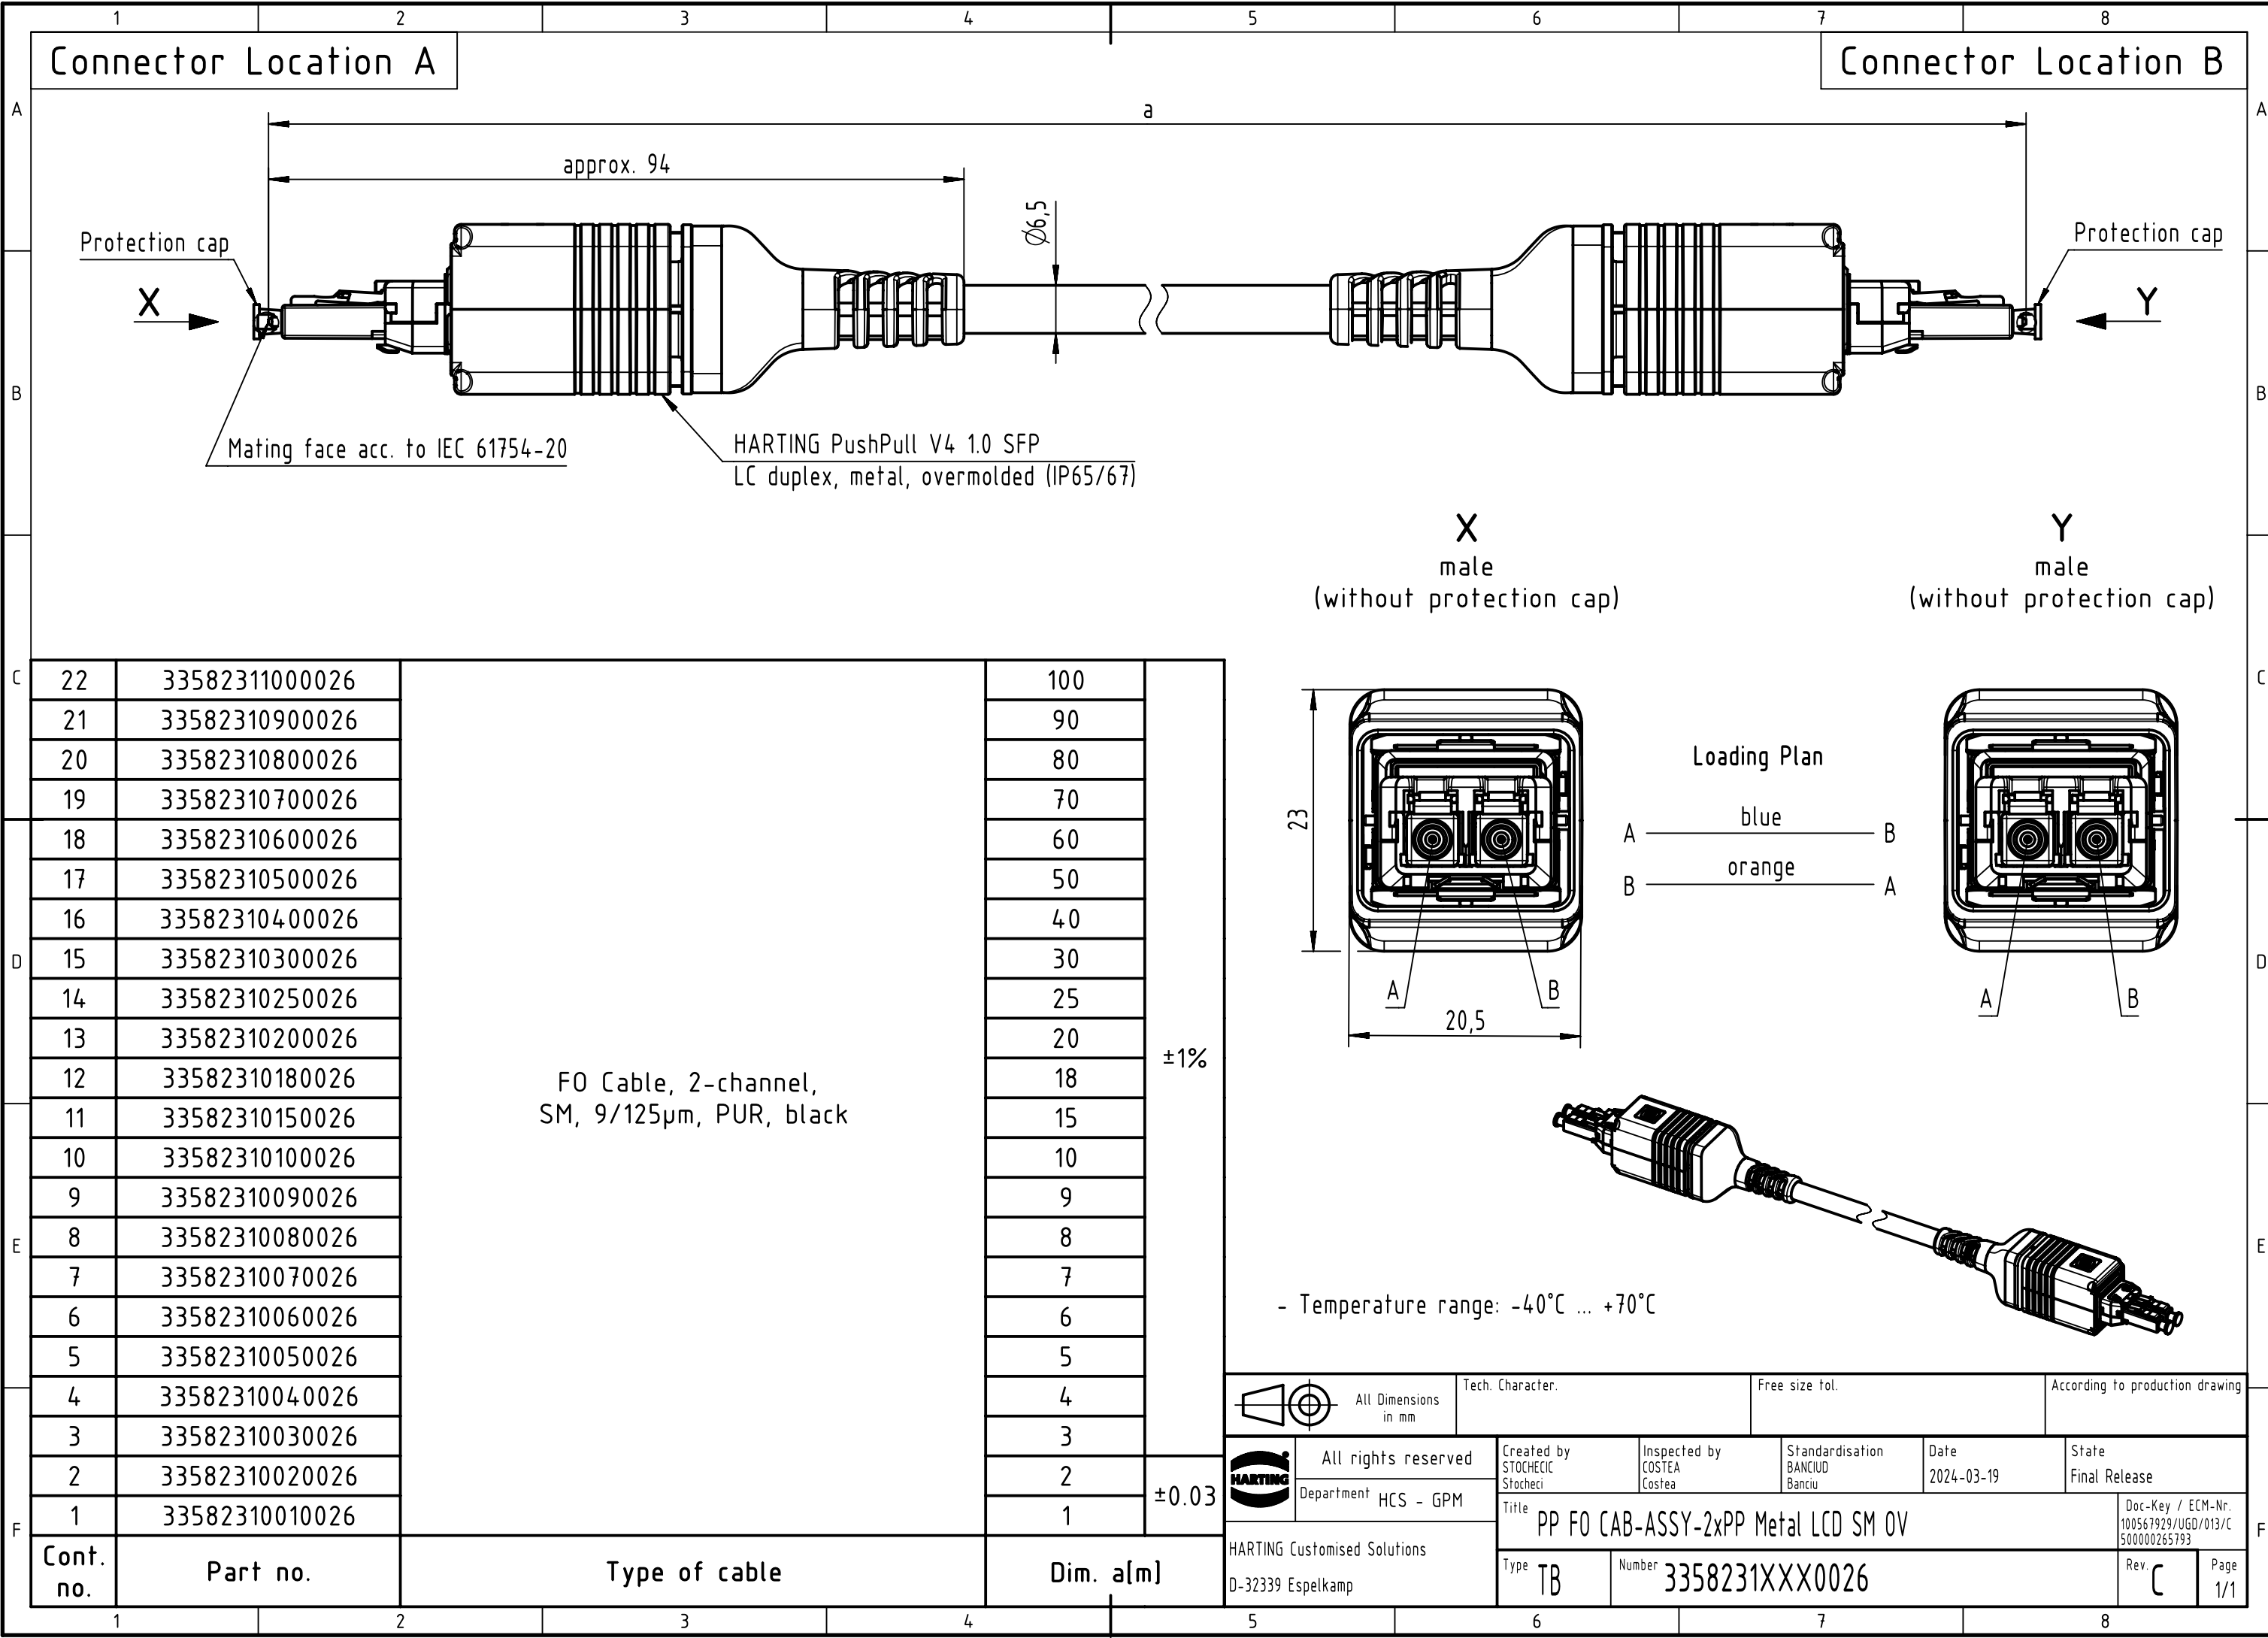

Connector Location A

Connector Location B

Protection cap

Protection cap

Mating face acc. to IEC 61754-20




HARTING PushPull V4 1.0 SFP
LC duplex, metal, overmolded (IP65/67)

X
male
(without protection cap)

Y
male
(without protection cap)

Loading Plan

A — blue — B
B — orange — A

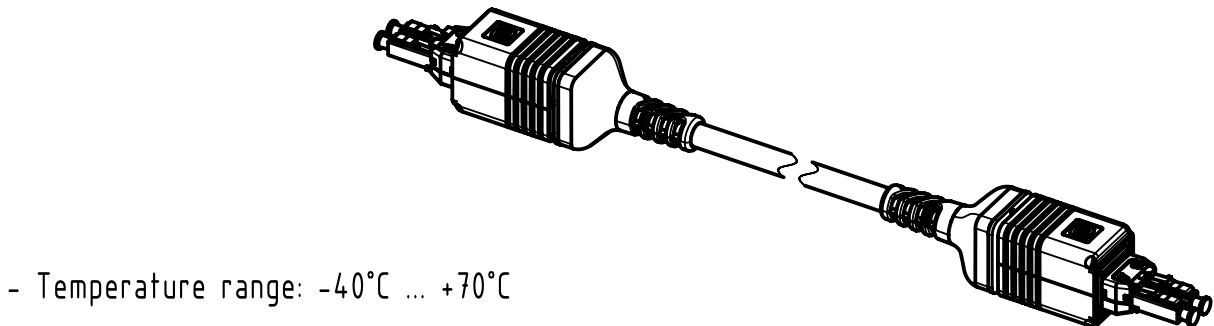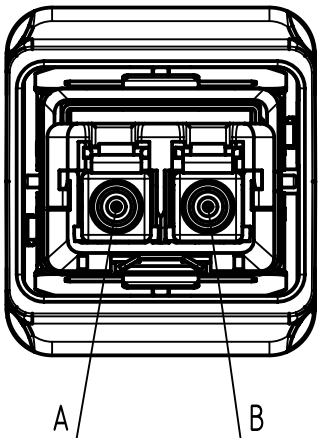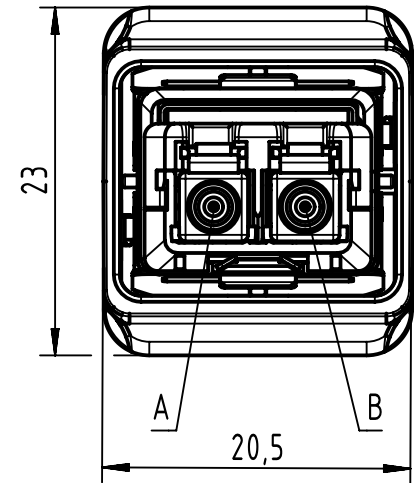

- Temperature range: -40°C ... +70°C

		Tech. Character.		Free size tol.		According to production drawing	
All Dimensions in mm		Created by STOCHECIC Stocheci		Inspected by COSTEA Costea		Standardisation BANCIUD Banciu	
All rights reserved		Date 2024-03-19		State Final Release		Doc-Key / ECM-Nr. 100567929/UGD/013/C 500000265793	
Department HCS - GPM		Title PP FO CAB-ASSY-2xPP Metal LCD SM OV		Rev. C		Page 1/1	
HARTING Customised Solutions		Type TB		Number 3358231XXX0026			
D-32339 Espelkamp							

22	33582311000026	FO Cable, 2-channel, SM, 9/125µm, PUR, black	100	±1%
21	33582310900026		90	
20	33582310800026		80	
19	33582310700026		70	
18	33582310600026		60	
17	33582310500026		50	
16	33582310400026		40	
15	33582310300026		30	
14	33582310250026		25	
13	33582310200026		20	
12	33582310180026		18	
11	33582310150026		15	
10	33582310100026		10	
9	33582310090026		9	
8	33582310080026		8	
7	33582310070026		7	
6	33582310060026		6	
5	33582310050026		5	
4	33582310040026		4	
3	33582310030026		3	
2	33582310020026		2	±0.03
1	33582310010026		1	
Cont. no.	Part no.	Type of cable	Dim. a[m]	