Connector Location A

Connector Location B

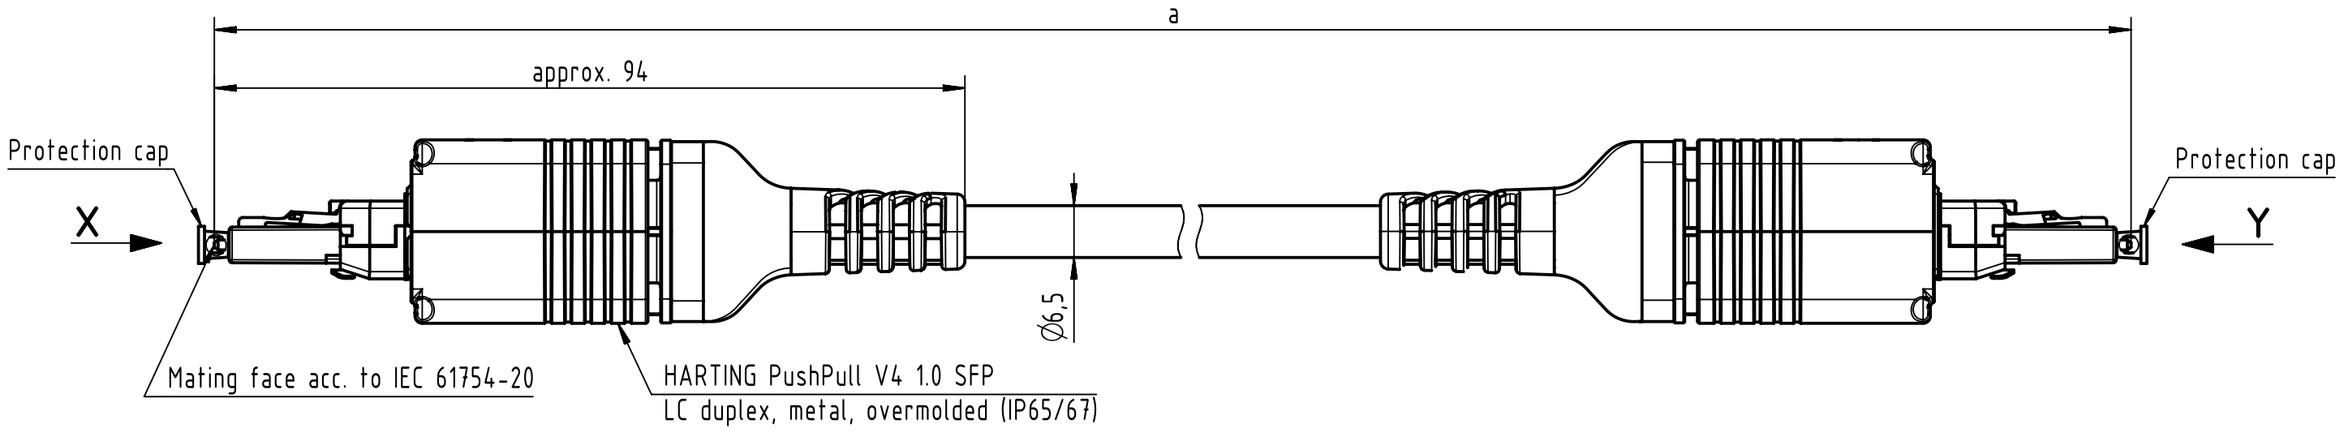

X
male
(without protection cap)

Y
male
(without protection cap)

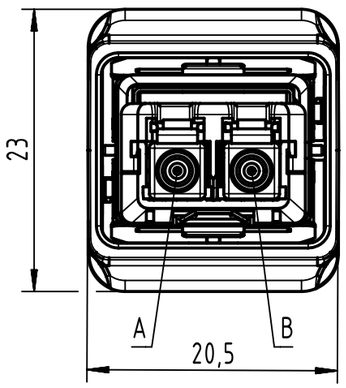

Loading Plan

A — blue — B

B — orange — A

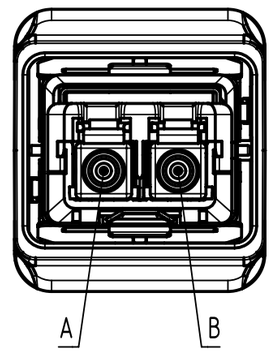

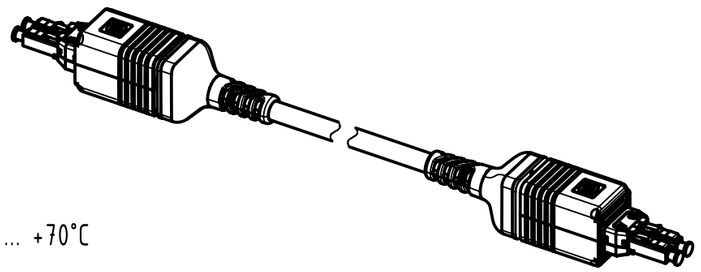

- Temperature range: -40°C ... +70°C

Cont. no.	Part no.	Type of cable	Dim. a[m]	
21	33582311000027	FO Breakout Cable, MM, 50/125µm, PUR, black, bend tolerant OM3	100	±1%
20	33582310900027		90	
19	33582310800027		80	
18	33582310700027		70	
17	33582310600027		60	
16	33582310500027		50	
15	33582310400027		40	
14	33582310300027		30	
13	33582310250027		25	
12	33582310200027		20	
11	33582310150027		15	
10	33582310100027		10	
9	33582310090027		9	
8	33582310080027		8	
7	33582310070027		7	
6	33582310060027		6	
5	33582310050027		5	
4	33582310040027		4	
3	33582310030027		3	
2	33582310020027		2	±0.03
1	33582310010027		1	

All Dimensions in mm | Tech. Character. | Free size tol. | According to production drawing

All rights reserved

Department HCS - GPM

HARTING Customised Solutions
D-32339 Espelkamp

Created by	Inspected by	Standardisation	Date	State
STOCHECIC Stocheci	COSTEA Costea	BANCIUD Banciu	2024-03-19	Final Release

Title: PP FO CABL-2xPP Metal LCD OV MM50

Doc-Key / ECM-Nr.: 100567929/UGD/015/C 500000265806

Type: TB | Number: 3358231XXX0027 | Rev.: C | Page: 1/1

A3