

Han D 64 Pos. M Insert Term. Block Left

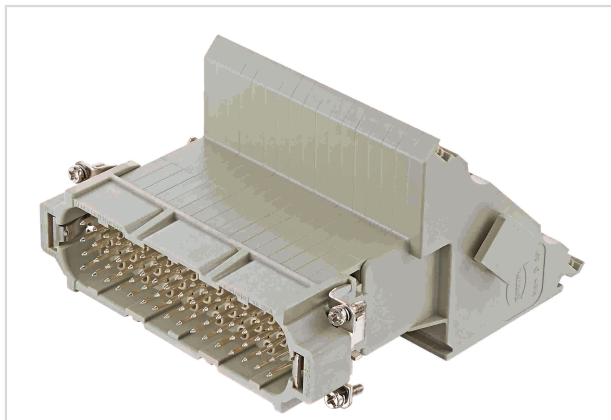


Image is for illustration purposes only. Please refer to product description.

Part number	09 21 064 4602
Specification	Han D 64 Pos. M Insert Term. Block Left
HARTING eCatalogue	https://b2b.harting.com/09210644602

Identification

Category	Inserts
Series	Han D [®] AV
Element	Terminal block connector
Specification	Left hand version Single contour (SK)

Version

Termination method	Screw termination
Gender	Male
Size	24 B
Number of contacts	64
PE contact	Yes

Technical characteristics

Conductor cross-section	0.2 ... 2.5 mm ²
Rated current	10 A
Rated voltage	250 V
Rated impulse voltage	4 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Insulation resistance	>10 ¹⁰ Ω
Contact resistance	≤4 mΩ
Tightening torque	0.5 Nm



Pushing Performance

Technical characteristics

Limiting temperature -40 ... +125 °C

Mating cycles ≥500

Material properties

Material (insert) Polycarbonate (PC)

Colour (insert) RAL 7032 (pebble grey)

Material (contacts) Copper alloy

Surface (contacts) Silver plated

Material flammability class acc. to UL 94 V-0

RoHS compliant

ELV status compliant with exemption

China RoHS 50

REACH Annex XVII substances No

REACH ANNEX XIV substances No

REACH SVHC substances No

Specifications and approvals

Specifications EN 60664-1
IEC 61984

Approvals DNV GL

UL / CSA UL 1977 ECBT2.E235076

Commercial data

Packaging size 1

Net weight 580 g

Country of origin Germany

European customs tariff number 85366990

eCl@ss 27440205 Contact insert for industrial connectors