

preLink Terminal mod AWG22/24, yel. 1=10

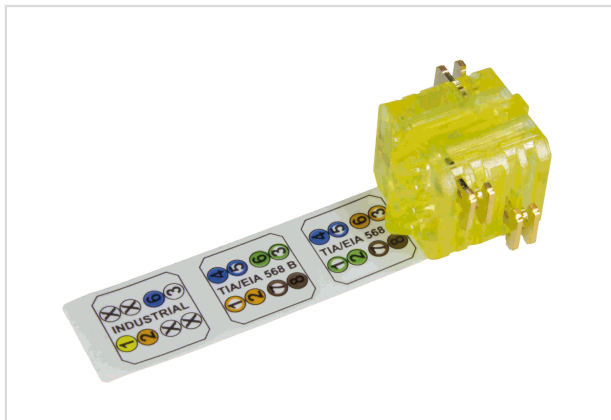


Image is for illustration purposes only. Please refer to product description.

Part number	20 82 000 0001
Specification	preLink Terminal mod AWG22/24, yel. 1=10
HARTING eCatalogue	https://b2b.harting.com/20820000001

Identification

Category	Connectors
Series	preLink®
Element	Terminal module
Specification	8-pins
Features	Suitable for termination of massive and flexible wires
	Suitable for all PoE versions
	Very fast preLink® termination technology

Version

Termination method	preLink® IDC insulation displacement termination
Pack contents	10 pieces

Technical characteristics

Conductor cross-section	0.22 ... 0.32 mm²
Conductor cross-section	AWG 24 ... AWG 22
Wire outer diameter	1.3 ... 1.6 mm
Limiting temperature	-40 ... +85 °C
Mating cycles	≥10
Vibration resistance	5.72 m/s² acc. to IEC 61373 Category 1 Class B
Shock resistance	5 g / 30 ms, 5 shocks / axis and direction acc. to IEC 61373 Category 1 Class B

Material properties

Colour (insert)	Yellow
-----------------	--------



Pushing Performance

Material properties

RoHS	compliant
ELV status	compliant
China RoHS	e
REACH Annex XVII substances	No
REACH ANNEX XIV substances	No
REACH SVHC substances	No

Specifications and approvals

Approvals	DNV GL
PROFINET	Yes

Commercial data

Packaging size	1
Net weight	15 g
Country of origin	Latvia
European customs tariff number	85389099
eCl@ss	27440291 Connector component (parts)