



Application Note

SolarEdge ONE Controller: Guide for Residential Commissioning and Third- Party Integrations

Version 1.9

July 2026

MAN-01-01231-1.9

Table Of Contents

- About 1
- Revision history 1
- Overview 1
- How it works 1
 - SolarEdge ONE Controller 2
- Supported functionalities 2
- Supported vendors 2
- Commission the ONE Controller 3
 - Before you begin to commission the ONE Controller 3
 - To commission the ONE Controller 3
 - LEDs ONE Controller status 4
 - Troubleshoot 4
- Commission heat pumps 5
 - Required equipment for installing heat pumps 6
 - Before you begin commissioning heat pumps 6
 - Commission heat pumps in SolarEdge Go 6
- Network configuration and security 7

About

This Application Note explains how to commission the SolarEdge ONE Controller for residential use, and explains how selected third-party devices integrate into the SolarEdge Home ecosystem.

Revision history


Version	Date	Description
1.9	July 2026	General updates
1.8	March 2026	Added NIBE, Bosch and Buderus Heat Pumps. Removed EV charger support
1.7	July 2025	Added network configuration and security table

Overview

SolarEdge ONE is an energy optimization system, that automatically manages the home's power in real-time to maximize savings and extend backup duration. SolarEdge ONE integrates with selected third-party devices using the SolarEdge ONE Controller or the SolarEdge Home Load Controller. This allows the customer to build a scalable system that integrates with third-party devices to monitor, manage, and expand your solar ecosystem as needed.

How it works

This diagram displays the interfaces among the devices in the SolarEdge ecosystem.

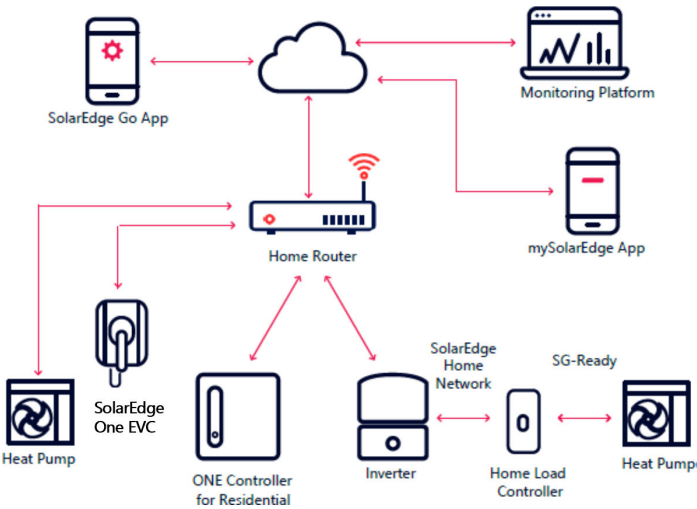

SolarEdge ONE Controller

This section provides an overview of the ONE Controller for residential use and describes how to commission the ONE Controller.

The ONE Controller integrates selected third-party products into the SolarEdge ecosystem by connecting to the home router via the Local Area Network (LAN). The home router links the ONE Controller to the inverter, heat pump, and SolarEdge servers. It communicates with integrated third-party devices through the home router using the EEBUS, enabling continuous communication among the devices, even without connectivity to the SolarEdge Cloud.

Supported functionalities

- Heat your hot water tank and buffer tank with Excess Solar
- Find your heat pump power consumption in your mySolarEdge app

Supported vendors

The following table displays the list of supported heat pumps vendors.

Device	Company	Model
Heat Pump	Vaillant 	All Heat Pumps from 2018 that support EEBUS. Before commissioning a Vaillant Heat Pump, install the following equipment: • Vaillant Heat Pump that supports EEBUS (all models from 2018) • Vaillant Communication Gateway VR921 or VR940F • Vaillant Wall Thermostat VRC700 or VRC720
Heat Pump	NIBE 	• S1155 / S1156 (S-series) • S1255 / S1256 (S-series) • S735 / S735C (S-series) • SMO S40 /SMO S50 (S-series) • VVM S320 / S325 (S-series) • VVM S330 (S-series) • VVM S500 (S-series) • SVM S332 (S-series)

Device	Company	Model
Heat Pump	Bosch 	• Compress 5800i AW • Compress 6800i AW • All power classes
Heat Pump	Buderus 	• Logatherm WLW 186i • Logatherm WLW 176i • All power classes

Commission the ONE Controller

Before you begin to commission the ONE Controller

- Mount and set up the ONE Controller



NOTE

Place the ONE Controller on a stable, flat surface or mount it on the wall. For details refer to the [SolarEdge ONE Controller for Residential Quick Installation Guide](#).

- Download SolarEdge Go to your mobile device
- Ensure you have inverter firmware V.4.22 or higher
- To connect the ONE Controller to the home router via Wi-Fi, ensure you know the network credentials
- Verify that SolarEdge Go has access to the relevant site

To commission the ONE Controller

This section explains how to commission the ONE Controller with the SolarEdge Go mobile application.

1. Turn the ONE Controller ON and wait until the Power LED is solid green.
2. Open **SolarEdge Go**.
3. Go to **Manage** > relevant site >  > **Add Device** > **ONE Controller** and tap **Next**.



NOTE

You can also use the following path: **Manage** > relevant site > **Actions** > **+ Add Device** and tap **ONE Controller**.

4. Scan the QR code on the bottom of ONE Controller or enter the serial number.
5. Select the connection mode to the local network:
 - a. **Ethernet** (recommended)
 - Or
 - b. **Wi-Fi**
 - i. Tap **Connect with Wi-Fi**.
 - ii. Select the network, enter the password, and tap **Connect**.
6. After the ONE Controller is connected, tap **Done**.

After commissioning is complete, the ONE Controller displays a solid Local LED confirming connectivity, and appears under the device inventory for the relevant site. You are ready to integrate third-party devices.

LEDs ONE Controller status

The following LED indications describe the status of the ONE Controller.

Name	Symbol	Indication
Cloud		• Solid: Connected to the inverter • Blinking: Internet connection available, attempting to connect to SolarEdge Cloud • Off: No connection to the internet
Local		• Solid: Connection to the inverter and all devices • Blinking: Lost communication between ONE Controller and the inverter or the third-party device • Off: No paired device
Power		• Solid: Normal operation • Blinking: Booting or updating • Off: No power

Troubleshoot

If you are unable to successfully commission the ONE Controller, check the following problems, according to the notification received by the SolarEdge Go app.

Problem	Troubleshoot
Unable to scan QR code	Manually enter serial number for the ONE Controller.

Problem	Troubleshoot
Incorrect Wi-Fi password	Verify you are using the correct SN of the local residential network.
No internet access on Wi-Fi connection	Verify the internet connectivity of the home router.
One Controller is already installed	There is already a commissioned ONE controller on the site. Multiple ONE controller devices are not necessary on a site.
No inverter on site	A leader inverter is necessary for commissioning. If you only have one inverter, ensure it is configured as a leader.
Incompatible inverter	The inverter's firmware needs to be upgraded. The current firmware version is not compatible with commissioning the ONE Controller.
No access from SolarEdge server to the ONE Controller	Ensure the ONE Controller is ON and connected to the internet.
No connection with SolarEdge server	There is a connection between the SolarEdge server and the inverter or the ONE Controller. Ensure the site has access to the internet.
The ONE Controller cannot communicate with the inverters	Ensure the inverter and the ONE Controller are both ON and connected to the same local network. Ensure that the selected site for commissioning in SolarEdge Go is the same as the one where the ONE Controller was installed.

Commission heat pumps

This section explains how to commission supported third-party heat pumps using the SolarEdge ONE Controller.



NOTE

To maximize energy management savings, we recommend the following:

- Homeowners should define the preferred schedule for their hot water
- The most effective strategy for homeowners is to determine the amount of hot water needed during the early morning and/or evening hours. This allows the SolarEdge ONE Energy Management System to heat the hot water tank using only excess solar power.
 - Set the hot water temperature to 48°C and schedule it daily from 17:00 to 22:00
 - During the day, the hot water tank remains at a lower temperature. The ONE Energy Management System ensures it reaches the desired temperature at the desired time, using as much Excess Solar as possible.

Required equipment for installing heat pumps



NOTE

Ensure your heat pump is a supported model, listed in [Supported vendors \[2\]](#).

Before commissioning Heat Pumps, install the following equipment:

- SolarEdge Residential PV System
- SolarEdge One Controller

Before you begin commissioning heat pumps

Before commissioning heat pumps, ensure the following:

- If your heat pump model requires a communication gateway, make sure the gateway is connected to the heat pump and to the same internet network as the ONE Controller and the SolarEdge inverter, via the home router
- The SolarEdge Go application is downloaded on your mobile device

Commission heat pumps in SolarEdge Go

To pair a heat pump to the ONE Controller:

1. Go to your heat pump **Settings**.



NOTE

Settings can be found on your heat pump app or on the heat pump's display, depending on your Heat Pump's model.



NOTICE

It is recommended to compare the ONE Controller's SKI number in your heat pump app with the SKI number displayed in the details page **ONE Controller** in the SolarEdge GO App.

- a. Enable **EEBUS communication**.
 - b. Add the ONE Controller as a **Trusted Device**.
2. Open **SolarEdge Go**, go to **Manage** and select the relevant site.
 3. Go to **Equipment > Local Controller > Connected** to verify the ONE Controller has been added and connected to the system.
 4. From the **Action** tab, go to **+Add Device** and select the heat pump.

5. After the heat pump is found, tap **Add Device**.

After the heat pump and the ONE Controller are connected, the heat pump appears on the device list and is available in mySolarEdge.

**NOTE**

Connection can take a few minutes.

Network configuration and security

Exposed network services and ports

The following table lists the network services and associated ports exposed by the device. This information may be required for configuring network access, firewall rules, securing services, and troubleshooting.

Port number	Service/ Protocol	Description	Required for operation	Recommendation
53	TCP	DNS	Yes	Required for DNS
68	UDP	DHCP	Yes	Required for DHCP
1234	UDP	chronyd	Yes	Required for time synchronization
5353	UDP	mDNS	Yes	Required for mDNS
8000	TCP	EEbus	Yes	Required for working with heat pumps
8989	TCP	EEbus	Yes	Required for working with heat pumps
8889	TCP	Local Service (NM)	No	Used for local service communication
22222	TCP	Device debugging	Yes	Required for remote debugging
48484	TCP	Device Monitor	Yes	Required for device monitoring
61665	TCP	Local Service (HMI)	No	Used for local service communication