
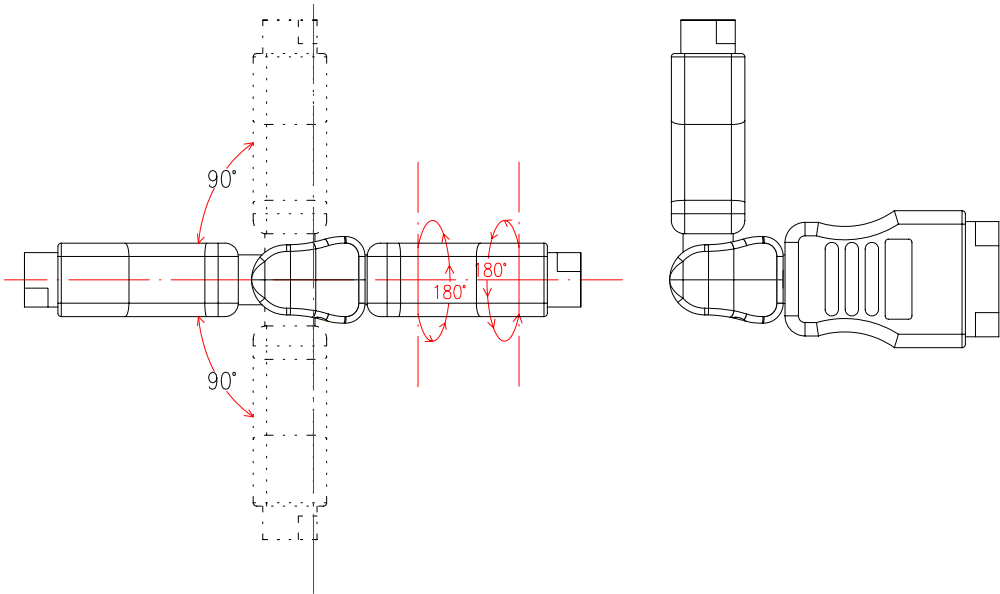


P1,P2:	M-Y259A
	M-259A


Customer No:	No:6
--------------	------

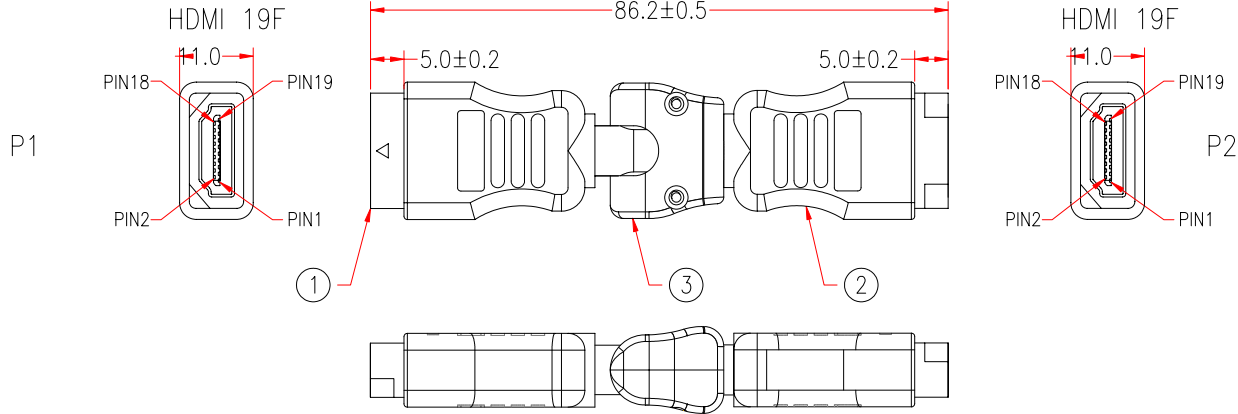

NOTE: ALL relevant materials are complied with RoHS directive
HDMI 19F(P1) PLUG MAY UP AND DOWN SIDES 90° IS CIRCLED
HDMI 19F(P2) PLUG MAY LEFT AND RIGHT SIDES 180° IS CIRCLED

5	PLASTIC HOOD BLACK AND SCREW, #4-40, ASSEMBLY TYPE	1set	M304
3&4	UL20276 30AWG INSULATOR WIRE(HDMI), LENGTH 90mm&95mm	20	M298
	BLACK HEAT SHRINK TUBE $\varnothing 3.0 \times 30\text{mm}$	2	M743
	BLACK HEAT SHRINK TUBE $\varnothing 5.0 \times 10\text{mm}$	1	M743
	PCB:0206	2	M730
	COPPER FOIL 15*45mm	2	M309
	MOLDED PE COLOR TRANSPARENT		TWN
	MOLDED PVC BLACK		M304
1	HDMI 19 FEMALE, GOLD PLATING 30u' ON CONTACTS & GOLD FLASH ON METAL HOOD, BLACK INSULATOR, PCB TYPE	2set	M83
No.	DESCRIPTION	Q'TY	Supplier

4468-2			
P1		P2	
1	_____	1	
2	_____	2	
	Σ 1:1		
18	_____	18	
19	_____	19	
SHIELD	_____	SHIELD	

PART NO. 4468-2		Revision:		Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm	
APPROVED					
CHECKED	HU				
DRAWING	YE				
DATE	13/MAR/09	ITEM NO.	EB478		UNIT:mm 

		CHECKED	
--	--	---------	--