

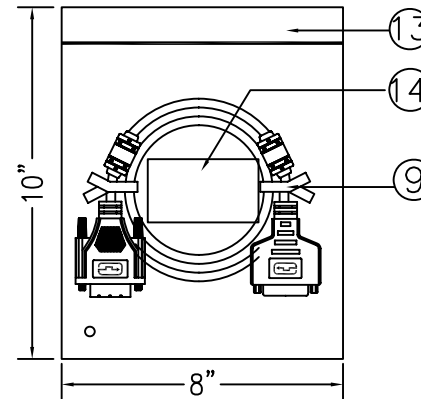


WEIGHT	CUSTOMER NO:	REMARK
270g-K5	K5423.2	EFB

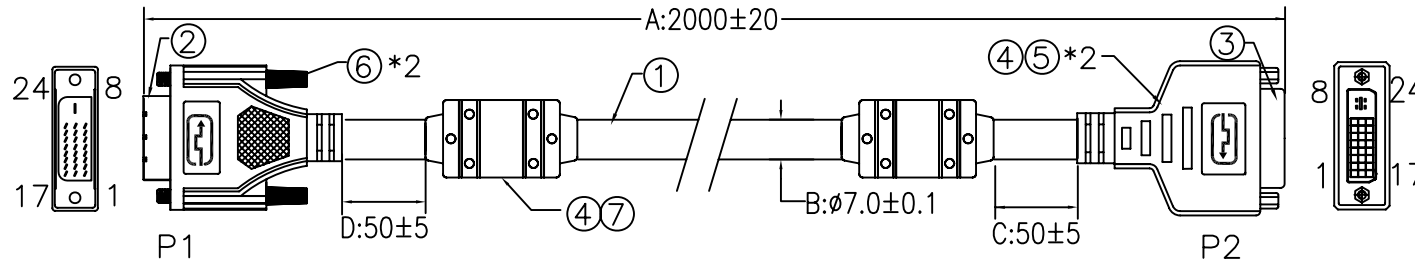

DVI24+1/M DVI24+5/F

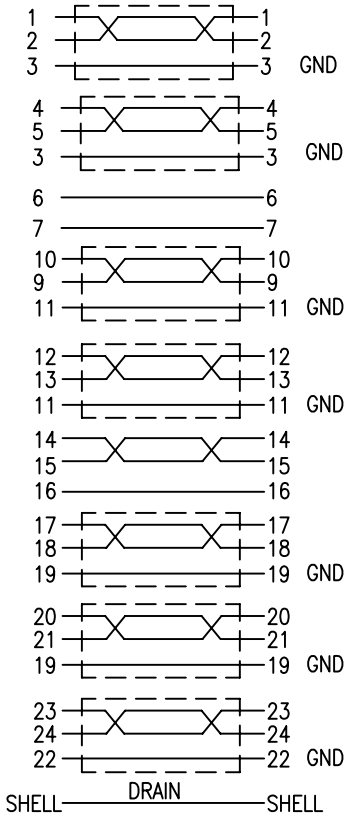

NOTE:

- 1) PRIMARY DIM:A.C.D
- 2) 1PCS/PE BAG+LABEL
- 3) P1 DIE NO.:OH24010; P2 DIE NO:OH24006,CORE DIE NO.:OF00007

5	OUTER JACKET PVC 45Pa BLACK(1101) RoHS
4	INNER JACKET PE (RoHS)
3	DVI 24+5/F BLACK SOLDER TYPE BRASS TERMINAL GOLD FLASH W/NUT W/O METAL HOOD ROHS
2	DVI 24P+1/M BLACK SOLDER TYPE TERMINAL GOLD FLASH W/O METAL HOODRoHS
1	UL20276 (30AWG*1Pair+AL Foil+Drain)*7+30AWG 1Pair+30AWG3C+Al Foil+Braid(85%)+Draid OD:7.0MM BLACK(1101) 2000MM (ROHS)

☐ 0
☐ S

DRAWING APPROVED _____		DATE: _____	
SAMPLE APPROVED PER _____		DATE: _____	
PROPRIETARY & CONFIDENTIAL. THIS DOCUMENT MAY NOT BE COPIED, OR DISCLOSED IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF EFB.			
 SCALE SHEET 1/1	MM TITLE DVI CABLE	 ENG. _____ DATE _____ CHECKED _____ DATE _____ APPROVED _____ DATE _____	
DIMENSIONAL TOLERANCES UNLESS OTHERWISE NOTED .X± .XX± .XXX± ANGLES± REV. A CUS.REV	CUS. P/N K5423.2 DRAW NO.		

5

1

6

WFM-ED-707B