

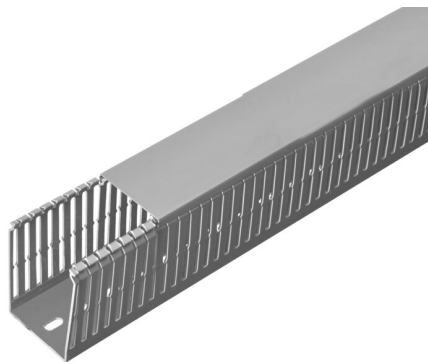


IMMAGINE  
RAPPRESENTATIVA



REPRESENTATIVE  
IMAGE

## ECS12080

### SLOTTED TRUNKING WITH COVER S 4/6/4 DIM. 120X80



Trunkings > Panelboards systems > Cable management >  
Slotted trunkings > Slotted cable trunking > Grey - type s -  
narrow slots 4/6/4

#### Technical Symbols/Marks/Approvals



#### Norms

EN 50085-1 EN 50085-2-3 UL 1565

## Description

Slotted trunking made of self-extinguishing PVC-based technopolymer (UL94 - V0). Perforated bottom according to the Standard DIN 43659. Second break line at the base of the slots permits to remove the whole trunking wall (with tool).

## Etim

**GROUP EG000007 - Slotted cable trunking system**

**CLASS EC000012 - Slotted cable trunking system**

|                             |                          |                           |        |                   |       |
|-----------------------------|--------------------------|---------------------------|--------|-------------------|-------|
| <b>Material</b>             | Polyvinyl chloride (PVC) | <b>Halogen free</b>       | No     | <b>Colour</b>     | Grey  |
| <b>Type of fastening</b>    | Bottom perforation       | <b>Width</b>              | 120 mm | <b>Height</b>     | 80 mm |
| <b>Length</b>               | 2 m                      | <b>Distance of slots</b>  | 6 mm   | <b>Slit width</b> | 4 mm  |
| <b>Type of side wall</b>    | Hole-/slot punching      | <b>Self-extinguishing</b> | Yes    | <b>Flexible</b>   | No    |
| <b>Usable cross section</b> | 8640 mm <sup>2</sup>     | <b>With cover</b>         | Yes    | <b>RAL-number</b> | 7030  |

## Technical Characteristics

**Separator predisposition** SI (2)

## Documentation available for download



### Certification

Certificato UL A-S  
ATL AMF  
E331386.pdf



### Certification

RINA  
DCMTVL\_1005538  
\_380865962\_2025.  
PDF



### Certification

Canali asolati tipo S  
IMQ\_EI617\_2020.p  
df

## Barcode



8054320286516

### Cardboard

16 MT

0.26x0.18x2.027 [m]

23.5008 [kg]



8054320282945

### Pallet

288 MT

423.0144 [kg]