




POLYAMIDE PA6.6 CABLE TIES

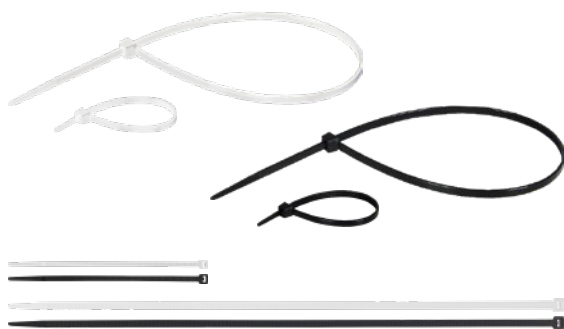

Material: Polyamide PA6.6
Self extinguishing: UL94-V2
Operating temperature: -40°C ÷ + 85°C
Installation temperature: -10°C

Good resistance to oils and greases, solvents, petroleum products.



Natural Color	Black Color	Width	Length	Max. Bundle Ø	Min. loop tensile	Packaging
Order N..	Order N.	[mm]	[mm]	[mm]	[kg]	
CTB2580	CTN2580	2,5	80	14,0	8	5.000/50.000
CTB2510	CTN2510	2,5	100	20,5	8	5.000/50.000
CTB2512	CTN2512	2,5	120	27,0	8	5.000/25.000
CTB2516	CTN2516	2,5	160	39,8	8	5.000/25.000
CTB2520	CTN2520	2,5	200	52,5	8	2.500/25.000
CTB3614	CTN3614	3,6	140	33,0	18	2.500/25.000
CTB3620	CTN3620	3,6	200	52,5	18	2.500/20.000
CTB3628	CTN3628	3,6	280	78	18	2.500/10.000
CTB3637	CTN3637	3,6	370	106,0	18	2.000/10.000
CTB4612	CTN4612	4,6	120	23,8	22	2.500/20.000
CTB4616	CTN4616	4,6	160	36,6	22	2.000/10.000
CTB4819	CTN4819	4,8	190	46,0	22	2.000/10.000
CTB4820	CTN4820	4,8	200	49,5	22	2.000/10.000
CTB4825	CTN4825	4,8	250	65,0	22	1.500/10.500
CTB4830	CTN4830	4,8	300	81,0	22	1.500/10.500
CTB4836	CTN4836	4,6	360	100	22	1.000/5.000
CTB4839	CTN4839	4,8	390	110,0	22	1.000/5.000
CTB4843	CTN4843	4,8	430	122,5	22	1.000/5.000
CTB7615	CTN7615	7,6	150	35,0	55	1.000/5.000
CTB7620	CTN7620	7,6	200	50,9	55	1.000/5.000
CTB7630	CTN7630	7,6	300	82,8	55	1.000/5.000
CTB7637	CTN7637	7,6	370	103,5	55	500/5.000
CTB7645	CTN7645	7,6	450	130,5	55	100/2.500
CTB7675	CTN7675	7,6	750	226	55	100/1.000
CTB9045	CTN9045	9,0	450	130,5	80	100/2.500
CTB9055	CTN9055	9,0	550	163,5	80	100/1.000
CTB9071	CTN9071	9,0	710	213,3	80	100/1.000
CTB9078	CTN9078	9,0	780	235,5	80	100/1.000
CTB9081	CTN9081	9,0	810	245,0	80	100/1.000
CTB9010	CTN9010	9,0	1020	312,0	80	100/500
CTB9012	CTN9012	9,0	1220	340	80	100/500
CTB9015	CTN9015	9,0	1530	474,5	80	100/500