

TECHNISCHE DATEN:
Aufbau

Hutmutter	Messing CuZn39Pb3, galv. vernickelt
Lamelleneinsatz	Polyamid PA6 V-2
Dichtring	Polychloropren-Nitrilkautschuk CR/NBR
Zwischenstutzen	Messing CuZn39Pb3, galv. vernickelt
O-Ring	Nitrilkautschuk NBR
Anschlussgewinde	Pg, nach DIN 40430

Eigenschaften

- für Kabel und Leitungen mit Schirmung
- integrierte Zugentlastung
- Verdrehschutz
- großer Dicht- und Klemmbereich

Temperaturbereich	-20 °C / +100 °C (dynamisch) -40 °C (statisch, kurzzeitig)
-------------------	---

Schutzart	IP68 - 5 bar
Prüfnorm	EN 62444

TECHNICAL DATA:
Configuration

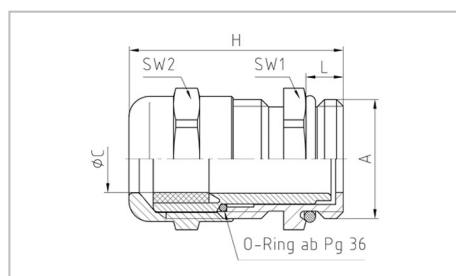
Dome nut	Brass CuZn39Pb3, nickel-plated
Lamellar insert	Polyamide PA6 V-2
Sealing ring	Polychloroprene-Nitrile rubber CR/NBR
Gland body	Brass CuZn39Pb3, nickel-plated
O-ring	Nitrile rubber NBR
Connecting thread	Pg, as per DIN 40430

Properties

- for cables with shielding
- integrated anchorage
- protection against twisting
- wide sealing and clamping range

Temperature range	-20 °C / +100 °C (dynamic) -40 °C (static, short term)
-------------------	---

Protection grade	IP68 - 5 bar
Test standard	EN 62444


Merkmale
Characteristics
Anschlussgewinde Standardlänge
Connecting thread standard length

A	øC mm	$\frac{H}{mm}$ L mm	SW1 mm	SW2 mm	H mm		Art.-Nr. / Part No.
Pg 7	3 - 6,5	5	14	14	24	100	50.007/EMV
Pg 9	4 - 8	6	17	17	29	100	50.009/EMV
Pg 11	5 - 10	6	20	20	29,5	100	50.011/EMV
Pg 13,5	6 - 12	6,5	22	22	31,5	50	50.013/EMV
Pg 16	10 - 14	6,5	24	24	31,5	50	50.016/EMV
Pg 21	13 - 18	7	30	30	34	25	50.021/EMV
Pg 29	18 - 25	8	40	40	39	25	50.029/EMV
Pg 36	24 - 32	9	50	50	45	10	50.036/EMV
Pg 42	30 - 38	10	57	57	49	5	50.042/EMV
Pg 48	34 - 44	10	64	64	52	5	50.048/EMV