


TOXT - optischer Sender

Art.-Nr. 307792

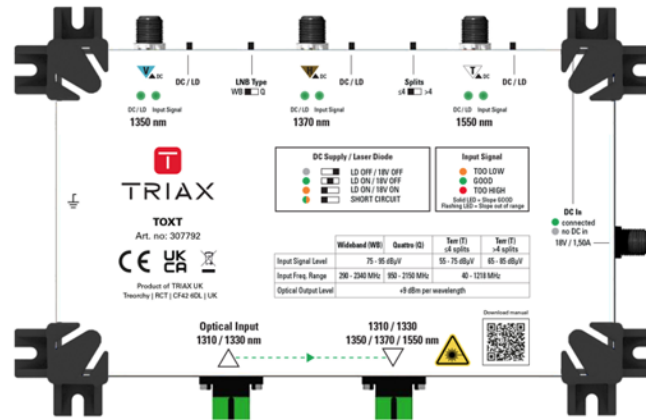

Optischer Sender Wideband Sat, zur Erweiterung des TOST für die Übertragung von 2 Sat-Positionen über eine Faser (exklusive Netzteil).

Technical specifications

		TOXT (Part No. 307792)
RF Inputs (F-connector)	-	2 x Satellite (WB / Q) 1 x TERR
Input frequency SAT	MHz	Wideband: 290 - 2340 Quattro: 950 - 2150
Input frequency TERR	MHz	47 - 1218
Optical outputs (SC/APC)	-	1
Optical inputs (SC/APC)	-	1
Optical output wavelengths	nm	1310 – 1330 (Bypass) 1350 – 1370 – 1550
Optical output power	dBm	+9 (per wavelength)
Minimal input level SAT	dBμV	75 - 95
Minimal input level TERR	dBμV	55 - 75 (TERR ≤4 splits) 65 - 85 (TERR >4 splits)
DC supply	-	18V / 400mA
DC supply TERR	-	12V / 200mA
Automatic Gain Control	dB	15
Automatic Slope Control	dB	10
Power consumption	W	27
DC input	-	18V / 2A (F-type)
Power Supply	-	Use an 18V / 2A Power Supply (Ref: 318166) Not included with product
Operating temperature range	°C	-10 to +50
Dimensions	Mm	221 x 141 x 50
Weight	kg	0.8